DISTRICT I 1625 N. French Dr., Hobbs, NM 88240 Phone (676) 393-8161 Fax: (675) 393-0720 DISTRICT II 811 S. First St., Artesia, NM 88210 Phone (675) 748-1283 Fax: (675) 748-9720

DISTRICT III

1000 Rio Brazos Rd., Aztec, NM 87410 Phone (506) 334-6178 Fax: (505) 334-6170 DISTRICT IV 1226 S. St. Francis Dr., Santa Fe, NM 87505 Phone (505) 476-3460 Pax: (506) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Department

Form C-102 Revised August 1, 2011

Submit one copy to appropriate District Office

OIL CONSERVATION DIVISION

1226 South St. Francis Dr. Santa Fe, New Mexico 87505

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

30-015- 44709	Pool Code 97565	Pool Name N. SEVEN RIVERS; GLORIETA-YESO		
Property Code 3/7243	Prop HUBER	Well Number 11H		
ogrid no. 371755	Oper PERCUSSION PETRO	Elevation 3504'		


Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	FEET from the	North/South line	FEET from the	East/West line	County
0	34	19 S	25 E		486	SOUTH	2188	EAST	EDDY

Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	FEET from the	North/South line	FEET from the	East/West line	County
0	3	20 S	25 E		20	SOUTH	2319	EAST	EDDY
Dedicated Acres	Joint o	r Infill (onsolidation (Code O	der No.				
160.57									

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

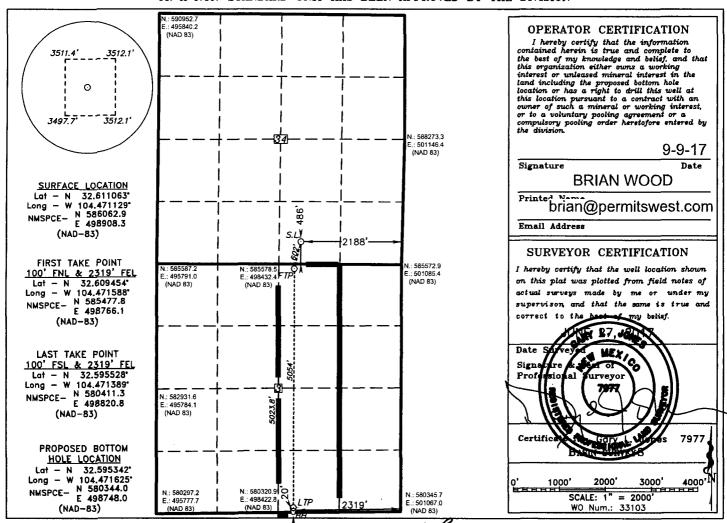

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy, Minerals and Natural Resources Department

Submit Original to Appropriate District Office

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

GAS CAPTURE PLAN

Date: <u>9-9-17</u>	
X Original Amended - Reason for Amendment:	Operator & OGRID No.: Percussion Petroleum Operating, LLC (371755)

This Gas Capture Plan outlines actions to be taken by the Operator to reduce well/production facility flaring/venting for new completion (new drill, recomplete to new zone, re-frac) activity.

Note: Form C-129 must be submitted and approved prior to exceeding 60 days allowed by Rule (Subsection A of 19.15.18.12 NMAC).

Well(s)/Production Facility – Name of facility

The well(s) that will be located at the production facility are shown in the table below.

Well Name	API	SHL (ULSTR)	SHL Footages	Expected MCF/D	Flared or Vented	Comments
Huber Federal 11H	30-015- 44109	O-34-19s-25e	486' FSL & 2188' FEL	100	<30 days	flare until well clean, then connect

Gathering System and Pipeline Notification

Well(s) will be connected to a production facility after flowback operations are complete, if gas transporter system is in place. The gas produced from production facility is dedicated to <u>DCP</u> and will be connected to <u>DCP</u> low/high pressure gathering system located in <u>Eddy</u> County, NM. It will require ≈2350.8' of pipeline to connect the facility to low/high pressure gathering system. <u>Operator</u> provides (periodically) to <u>Gas Transporter</u> a drilling, completion and estimated first production date for wells that are scheduled to be drilled in the foreseeable future. In addition, <u>Operator</u> and <u>Gas Transporter</u> have periodic conference calls to discuss changes to drilling and completion schedules. Gas from these wells will be processed at <u>Gas Transporter</u> Processing Plant located in Sec. <u>36</u>, T. <u>19 S.</u>, R. <u>24 E.</u>, <u>Eddy</u> County, NM. The actual flow of the gas will be based on compression operating parameters and gathering system pressures.

Flowback Strategy

After the fracture treatment/completion operations, well(s) will be produced to temporary production tanks and gas will be flared or vented. During flowback, the fluids and sand content will be monitored. When the produced fluids contain minimal sand, the wells will be turned to production facilities. Gas sales should start as soon as the wells start flowing through the production facilities, unless there are operational issues on <u>Gas Transporter</u> system at that time. Based on current information, it is <u>Operator's</u> belief the system can take this gas upon completion of the well(s).

Safety requirements during cleanout operations from the use of underbalanced air cleanout systems may necessitate that sand and non-pipeline quality gas be vented and/or flared rather than sold on a temporary basis.

Alternatives to Reduce Flaring

Below are alternatives considered from a conceptual standpoint to reduce the amount of gas flared.

- Power Generation On lease
 - o Only a portion of gas is consumed operating the generator, remainder of gas will be flared
- Compressed Natural Gas On lease
 - o Gas flared would be minimal, but might be uneconomical to operate when gas volume declines
- NGL Removal On lease
 - o Plants are expensive, residue gas is still flared, and uneconomical to operate when gas volume declines