

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
APPLICATION FOR PERMIT TO DRILL OR REENTER

FORM APPROVED
OMB No. 1004-0137
Expires October 31, 2014

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. NMNM92167
1b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name
2. Name of Operator CIMAREX ENERGY COMPANY		7. If Unit or CA Agreement, Name and No.
3a. Address 202 S. Cheyenne Ave., Ste 1000 Tulsa OK 74		8. Lease Name and Well No. 317791 DAVINCI 7-18 FEDERAL COM 9H
3b. Phone No. (include area code) (432)620-1936		9. API Well No. 30-015-44697
4. Location of Well (Report location clearly and in accordance with any State requirements.) At surface LOT 7 / 410 FSL / 1050 FWL / LAT 32.1529 / LONG -104.234597 At proposed prod. zone LOT 4 / 330 FSL / 380 FWL / LAT 32.123533 / LONG -104.236747		10. Field and Pool, or Exploratory WOLFCAMP / PURPLE SAGE WOLFCAMP
14. Distance in miles and direction from nearest town or post office*		11. Sec., T. R. M. or Blk. and Survey or Area SEC 6 / T25S / R27E / NMP
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 330 feet		12. County or Parish EDDY
16. No. of acres in lease 878.57		13. State NM
17. Spacing Unit dedicated to this well 635.36		
18. Distance from proposed location* to nearest well, drilling, completed, 20 feet applied for, on this lease, ft.		20. BLM/BIA Bond No. on file FED: NMB001188
19. Proposed Depth 9752 feet / 20205 feet		
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 3279 feet		23. Estimated duration 30 days
22. Approximate date work will start* 02/01/2018		

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, must be attached to this form:

- | | |
|---|---|
| <ul style="list-style-type: none"> 1. Well plat certified by a registered surveyor. 2. A Drilling Plan. 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | <ul style="list-style-type: none"> 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). 5. Operator certification 6. Such other site specific information and/or plans as may be required by the BLM. |
|---|---|

25. Signature (Electronic Submission)		Name (Printed/Typed) Amithy Crawford / Ph: (432)620-1909	Date 10/25/2017
Title Regulatory Analyst			
Approved by (Signature) (Electronic Submission)		Name (Printed/Typed) Cody Layton / Ph: (575)234-5959	Date 02/02/2018
Title Supervisor Multiple Resources			
Office CARLSBAD			

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)

BUREAU OF LAND MANAGEMENT
DISTRICT OFFICE
FEB 15 2018
RECEIVED

APPROVED WITH CONDITIONS

Approval Date: 02/02/2018

RUP 2-19-18



Application for Permit to Drill

APD Package Report

Date Printed: 02/05/2018 08:32 AM

APD ID: 10400023870	Well Status: AAPD
APD Received Date: 10/25/2017 08:13 AM	Well Name: DAVINCI 7-18 FEDERAL CO
Operator: CIMAREX ENERGY COMPANY	Well Number: 9H

APD Package Report Contents

- Form 3160-3
- Operator Certification Report
- Application Report
- Application Attachments
 - Well Plat: 1 file(s)
- Drilling Plan Report
- Drilling Plan Attachments
 - Blowout Prevention Choke Diagram Attachment: 3 file(s)
 - Blowout Prevention BOP Diagram Attachment: 3 file(s)
 - Casing Design Assumptions and Worksheet(s): 5 file(s)
 - Hydrogen sulfide drilling operations plan: 1 file(s)
 - Proposed horizontal/directional/multi-lateral plan submission: 1 file(s)
 - Other Variances: 2 file(s)
- SUPO Report
- SUPO Attachments
 - Existing Road Map: 1 file(s)
 - Attach Well map: 1 file(s)
 - Production Facilities map: 1 file(s)
 - Water source and transportation map: 1 file(s)
 - Well Site Layout Diagram: 1 file(s)
 - Other SUPO Attachment: 5 file(s)
- PWD Report
- PWD Attachments
 - None
- Bond Report
- Bond Attachments
 - None

U.S. DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
ARTESIA DISTRICT
FEB 15 2018
RECEIVED

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME:	Cimarex Energy Co
LEASE NO.:	NM110348
WELL NAME & NO.:	9H – Davinci 7 18 Federal Com
SURFACE HOLE FOOTAGE:	410'/S & 1050'/W
BOTTOM HOLE FOOTAGE:	330'/S & 380'/W, sec. 18
LOCATION:	Sec. 6, T. 25 S, R. 27 E
COUNTY:	Eddy County

COA

H2S	<input type="radio"/> Yes	<input checked="" type="radio"/> No	
Potash	<input checked="" type="radio"/> None	<input type="radio"/> Secretary	<input type="radio"/> R-111-P
Cave Karst Potential	<input type="radio"/> Low	<input type="radio"/> Medium	<input checked="" type="radio"/> High
Variance	<input type="radio"/> None	<input checked="" type="radio"/> Flex Hose	<input type="radio"/> Other
Wellhead	<input type="radio"/> Conventional	<input checked="" type="radio"/> Multibowl	<input type="radio"/> Both
Other	<input type="checkbox"/> 4 String Area	<input type="checkbox"/> Capitan Reef	<input type="checkbox"/> WIPP

A. Hydrogen Sulfide

Hydrogen Sulfide (H2S) monitors shall be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the Hydrogen Sulfide area shall meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, provide measured values and formations to the BLM.

B. CASING

1. The 13-3/8 inch surface casing shall be set at approximately 450 feet (a minimum of 25 feet into the Rustler Anhydrite and above the salt) and cemented to the surface. **Additional cement maybe required. Excess calculates to 14%.**
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement).
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours

after bringing cement to surface or 500 pounds compressive strength, whichever is greater.

- d. If cement falls back, remedial cementing will be done prior to drilling out that string.

2. The minimum required fill of cement behind the 9-5/8 inch intermediate casing is:
 - Cement to surface. If cement does not circulate see B.1.a, c-d above.

Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.

- ❖ In High Cave/Karst Areas if cement does not circulate to surface on the first two casing strings, the cement on the 3rd casing string must come to surface.

Operator shall filled 1/3rd casing with fluid while running production to maintain collapse safety factor.

3. The minimum required fill of cement behind the 7 inch production casing is: Cement should tie-back at least 200 feet into previous casing string. Operator shall provide method of verification. **Additional cement maybe required. Excess calculates to 22%.**

Operator shall filled 1/3rd casing with fluid while running liner to maintain collapse safety factor.

4. The minimum required fill of cement behind the 4-1/2 inch production liner is:
 - Cement should tie-back 100' into the previous casing. Operator shall provide method of verification. **Additional cement maybe required. Excess calculates to 8%.**

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).
2. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **2000 (2M)** psi.
3. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the 9-5/8 intermediate casing shoe shall be **3000 (3M)** psi.
4. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the 7 intermediate casing shoe shall be **5000 (5M)** psi.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

Eddy County

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,
(575) 361-2822

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. **On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.**
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. **If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:**
 - a. **Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.**
 - b. **If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.**
 - c. **Manufacturer representative shall install the test plug for the initial BOP test.**
 - d. **If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.**
 - e. **Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.**
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin

after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).

- b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the plug. However, **no tests** shall commence until the cement has had a minimum of 24 hours setup time, except the casing pressure test can be initiated immediately after bumping the plug (only applies to single stage cement jobs).
- c. The tests shall be done by an independent service company utilizing a test plug. The results of the test shall be reported to the appropriate BLM office.
- d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- e. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- f. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes. This test shall be performed prior to the test at full stack pressure.
- g. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

Waste Minimization Plan (WMP)

In the interest of resource development, submission of additional well gas capture development plan information is deferred but may be required by the BLM Authorized Officer at a later date.

ZS 012518

**PECOS DISTRICT
SURFACE USE
CONDITIONS OF APPROVAL**

OPERATOR'S NAME:	Cimarex Energy Co
LEASE NO.:	NM110348
WELL NAME & NO.:	9H – Davinci 7 18 Federal Com
SURFACE HOLE FOOTAGE:	410'/S & 1050'/W
BOTTOM HOLE FOOTAGE:	330'/S & 380'/W, sec. 18
LOCATION:	Section 6, T. 25 S., R. 27 E.
COUNTY:	Eddy County, New Mexico

TABLE OF CONTENTS

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below.

- General Provisions**
- Permit Expiration**
- Archaeology, Paleontology, and Historical Sites**
- Noxious Weeds**
- Special Requirements**
 - Cave/Karst
 - Watershed/Water Quality
 - Buried and Surface Pipeline(s)
 - Tank Battery
- Construction**
 - Notification
 - Topsoil
 - Closed Loop System
 - Federal Mineral Material Pits
 - Well Pads
 - Roads
- Road Section Diagram**
- Production (Post Drilling)**
 - Well Structures & Facilities
 - Pipelines
 - Electric Lines
- Interim Reclamation**
- Final Abandonment & Reclamation**

I. GENERAL PROVISIONS

The approval of the Application For Permit To Drill (APD) is in compliance with all applicable laws and regulations: 43 Code of Federal Regulations 3160, the lease terms, Onshore Oil and Gas Orders, Notices To Lessees, New Mexico Oil Conservation Division (NMOCD) Rules, National Historical Preservation Act As Amended, and instructions and orders of the Authorized Officer. Any request for a variance shall be submitted to the Authorized Officer on Form 3160-5, Sundry Notices and Report on Wells.

II. PERMIT EXPIRATION

If the permit terminates prior to drilling and drilling cannot be commenced within 60 days after expiration, an operator is required to submit Form 3160-5, Sundry Notices and Reports on Wells, requesting surface reclamation requirements for any surface disturbance. However, if the operator will be able to initiate drilling within 60 days after the expiration of the permit, the operator must have set the conductor pipe in order to allow for an extension of 60 days beyond the expiration date of the APD. (Filing of a Sundry Notice is required for this 60 day extension.)

III. ARCHAEOLOGICAL, PALEONTOLOGY & HISTORICAL SITES

Any cultural and/or paleontological resource discovered by the operator or by any person working on the operator's behalf shall immediately report such findings to the Authorized Officer. The operator is fully accountable for the actions of their contractors and subcontractors. The operator shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery shall be made by the Authorized Officer to determine the appropriate actions that shall be required to prevent the loss of significant cultural or scientific values of the discovery. The operator shall be held responsible for the cost of the proper mitigation measures that the Authorized Officer assesses after consultation with the operator on the evaluation and decisions of the discovery. Any unauthorized collection or disturbance of cultural or paleontological resources may result in a shutdown order by the Authorized Officer.

IV. NOXIOUS WEEDS

The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

V. SPECIAL REQUIREMENT(S)

Watershed/Water Quality:

For all proposed actions; the entire perimeter of the well pads will be bermed to prevent oil, salt, and other chemical contaminants from leaving the well pad.

- The compacted berm shall be constructed at a minimum of 36 inches high with impermeable mineral material (e.g. caliche).
- Install a diversion ditch around the northeast corner of the well pad to control surface water runoff during construction and operation of the well location.
- No water flow from the uphill side(s) of the pad shall be allowed to enter the well pad.
- The topsoil stockpile shall be located outside the bermed well pad.
- Topsoil, either from the well pad or surrounding area, shall not be used to construct the berm.
- No storm drains, tubing or openings shall be placed in the berm.
- If fluid collects within the bermed area, the fluid must be vacuumed into a safe container and disposed of properly at a state approved facility.
- The integrity of the berm shall be maintained around the surfaced pad throughout the life of the well and around the downsized pad after interim reclamation has been completed.
- Any access road entering the well pad shall be constructed so that the integrity of the berm height surrounding the well pad is not compromised. (Any access road crossing the berm cannot be lower than the berm height.)
- Any water erosion that may occur due to the construction of the well pad during the life of the well will be corrected within two weeks and proper measures will be taken to prevent future erosion.
- When crossing the ephemeral stream that drains into **North Hackberry Draw** erosion and sediment controls must be placed to mitigate any impacts downstream and/or to the floodplain.

Buried and Surface Pipeline(s):

- A leak detection plan will be submitted to the BLM Carlsbad Field Office for approval prior to pipeline installation. The method could incorporate gauges to detect pressure drops, siting valves and lines so they can be visually inspected periodically or installing electronic sensors to alarm when a leak is present. The leak detection plan will incorporate an automatic shut off system that will be installed for proposed pipelines to minimize the effects of an undesirable event. Regular monitoring is required to quickly identify leaks for their immediate and proper treatment.

Tank Battery:

- Tank battery locations will be lined and bermed. A 20 mil permanent liner will be installed with a 4 oz. felt backing to prevent tears or punctures. Tank battery berms must be large enough to contain 1 ½ times the content of the largest tank.
- Automatic shut off, check valves, or similar systems will be installed for tanks to minimize the effects of catastrophic line failures used in production or drilling.

Cave Karst

Construction Mitigation

In order to mitigate the impacts from construction activities on cave and karst resources, the following Conditions of Approval will apply to this APD:

- In the event that any underground voids are encountered during construction activities, construction activities will be halted and the BLM will be notified immediately.
- No Blasting to prevent geologic structure instabilities.
- Pad Berming to minimize effects of any spilled contaminants.

Drilling Mitigation

Federal regulations and standard Conditions of Approval applied to all APDs require that adequate measures are taken to prevent contamination to the environment. Due to the extreme sensitivity of the cave and karst resources in this project area, the following additional Conditions of Approval will be added to this APD.

To prevent cave and karst resource contamination the following will be required.

- Closed Mud System Using Steel Tanks with All Fluids and Cuttings Hauled Off.
- Rotary drilling with fresh water where cave or karst features are expected to prevent contamination of freshwater aquifers.
- Directional Drilling allowed after at least 100 feet below the cave occurrence zone to prevent additional impacts resulting from directional drilling.
- Lost Circulation zones logged and reported in the drilling report so BLM can assess the situation and work with the operator on corrective actions.
- Additional drilling, casing, and cementing procedures to protect cave zones and fresh water aquifers. See Drilling COAs.

Production Mitigation

In order to mitigate the impacts from production activities and due to the nature of karst terrain, the following Conditions of Approval will apply to this APD:

- Tank battery liners and berms to minimize the impact resulting from leaks.
- Leak detection system to provide an early alert to operators when a leak has occurred.
- Automatic shut off, check valves, or similar systems will be installed for pipelines and tanks to minimize the effects of line failures used in production or drilling.

Residual and Cumulative Mitigation

- Nontoxic fluorescent dyes will be added to the drilling fluid when the hole is spudded and will be circulated to the bottom of the karst layers. This provides data as part of a long-term monitoring study.

- Annual pressure monitoring will be performed by the operator. If the test results indicate a casing failure has occurred, remedial action will be undertaken to correct the problem to the BLM's approval.

Plugging and Abandonment Mitigation

Abandonment Cementing: Upon well abandonment in high cave karst areas additional plugging conditions of approval may be required. The BLM will assess the situation and work with the operator to ensure proper plugging of the wellbore.

VI. CONSTRUCTION

A. NOTIFICATION

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Carlsbad Field Office at (575) 234-5909 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved APD and Conditions of Approval (COA) on the well site and they shall be made available upon request by the Authorized Officer.

B. TOPSOIL

The operator shall strip the top portion of the soil (root zone) from the entire well pad area and stockpile the topsoil along the edge of the well pad as depicted in the APD. The root zone is typically six (6) inches in depth. All the stockpiled topsoil will be redistributed over the interim reclamation areas. Topsoil shall not be used for berming the pad or facilities. For final reclamation, the topsoil shall be spread over the entire pad area for seeding preparation.

Other subsoil (below six inches) stockpiles must be completely segregated from the topsoil stockpile. Large rocks or subsoil clods (not evident in the surrounding terrain) must be buried within the approved area for interim and final reclamation.

C. CLOSED LOOP SYSTEM

Tanks are required for drilling operations: No Pits.

The operator shall properly dispose of drilling contents at an authorized disposal site.

D. FEDERAL MINERAL MATERIALS PIT

Payment shall be made to the BLM prior to removal of any federal mineral materials. Call the Carlsbad Field Office at (575) 234-5972.

E. WELL PAD SURFACING

Surfacing of the well pad is not required.

If the operator elects to surface the well pad, the surfacing material may be required to be removed at the time of reclamation. The well pad shall be constructed in a manner which creates the smallest possible surface disturbance, consistent with safety and operational needs.

F. EXCLOSURE FENCING (CELLARS & PITS)

Exclosure Fencing

The operator will install and maintain exclosure fencing for all open well cellars to prevent access to public, livestock, and large forms of wildlife before and after drilling operations until the pit is free of fluids and the operator initiates backfilling. (For examples of exclosure fencing design, refer to BLM's Oil and Gas Gold Book, Exclosure Fence Illustrations, Figure 1, Page 18.)

G. ON LEASE ACCESS ROADS**Road Width**

The access road shall have a driving surface that creates the smallest possible surface disturbance and does not exceed fourteen (14) feet in width. The maximum width of surface disturbance, when constructing the access road, shall not exceed twenty-five (25) feet.

Surfacing

Surfacing material is not required on the new access road driving surface. If the operator elects to surface the new access road or pad, the surfacing material may be required to be removed at the time of reclamation.

Where possible, no improvements should be made on the unsurfaced access road other than to remove vegetation as necessary, road irregularities, safety issues, or to fill low areas that may sustain standing water.

The Authorized Officer reserves the right to require surfacing of any portion of the access road at any time deemed necessary. Surfacing may be required in the event the road deteriorates, erodes, road traffic increases, or it is determined to be beneficial for future field development. The surfacing depth and type of material will be determined at the time of notification.

Crowning

Crowning shall be done on the access road driving surface. The road crown shall have a grade of approximately 2% (i.e., a 1" crown on a 14' wide road). The road shall conform to Figure 1; cross section and plans for typical road construction.

Ditching

Ditching shall be required on both sides of the road.

Turnouts


Vehicle turnouts shall be constructed on the road. Turnouts shall be intervisible with interval spacing distance less than 1000 feet. Turnouts shall conform to Figure 1; cross section and plans for typical road construction.

Drainage

Drainage control systems shall be constructed on the entire length of road (e.g. ditches, sidehill outsloping and insloping, lead-off ditches, culvert installation, and low water crossings).

A typical lead-off ditch has a minimum depth of 1 foot below and a berm of 6 inches above natural ground level. The berm shall be on the down-slope side of the lead-off ditch.

Cross Section of a Typical Lead-off Ditch

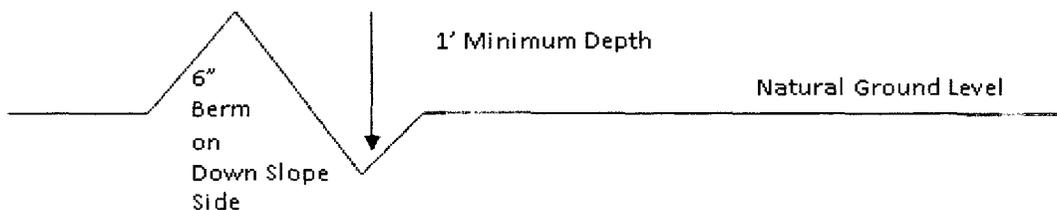

All lead-off ditches shall be graded to drain water with a 1 percent minimum to 3 percent maximum ditch slope. The spacing interval are variable for lead-off ditches and shall be determined according to the formula for spacing intervals of lead-off ditches, but may be amended depending upon existing soil types and centerline road slope (in %);

Formula for Spacing Interval of Lead-off Ditches

Example - On a 4% road slope that is 400 feet long, the water flow shall drain water into a lead-off ditch. Spacing interval shall be determined by the following formula:

$$400 \text{ foot road with } 4\% \text{ road slope: } \frac{400'}{4\%} + 100' = 200' \text{ lead-off ditch interval}$$

Cattle guards

An appropriately sized cattle guard sufficient to carry out the project shall be installed and maintained at fence/road crossings. Any existing cattle guards on the access road route shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattle guards that are in place and are utilized during lease operations.

Fence Requirement

Where entry is granted across a fence line, the fence shall be braced and tied off on both sides of the passageway prior to cutting. The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fences.

Public Access

Public access on this road shall not be restricted by the operator without specific written approval granted by the Authorized Officer.

Construction Steps

1. Salvage topsoil
2. Construct road

3. Redistribute topsoil
4. Revegetate slopes

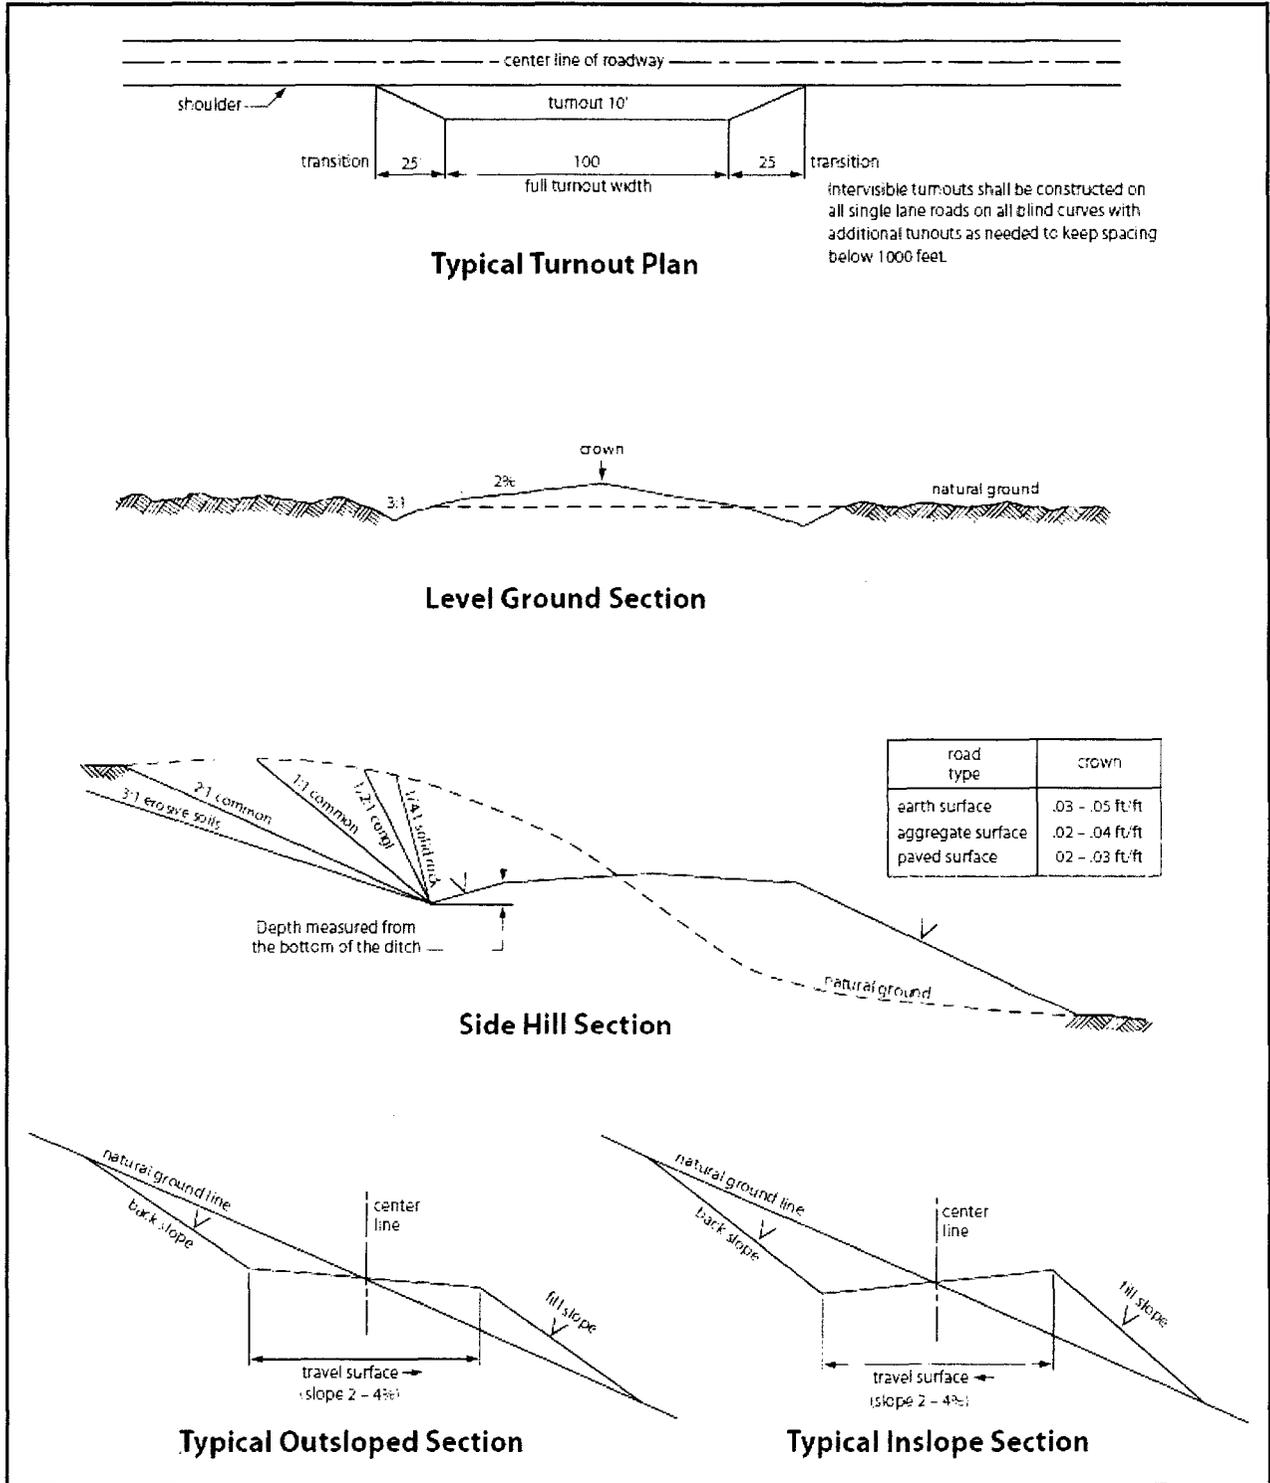


Figure 1. Cross-sections and plans for typical road sections representative of BLM resource or FS local and higher-class roads.

VII. PRODUCTION (POST DRILLING)

A. WELL STRUCTURES & FACILITIES

Placement of Production Facilities

Production facilities should be placed on the well pad to allow for maximum interim recontouring and revegetation of the well location.

Exclosure Netting (Open-top Tanks)

Immediately following active drilling or completion operations, the operator will take actions necessary to prevent wildlife and livestock access, including avian wildlife, to all open-topped tanks that contain or have the potential to contain salinity sufficient to cause harm to wildlife or livestock, hydrocarbons, or Resource Conservation and Recovery Act of 1976-exempt hazardous substances. At a minimum, the operator will net, screen, or cover open-topped tanks to exclude wildlife and livestock and prevent mortality. If the operator uses netting, the operator will cover and secure the open portion of the tank to prevent wildlife entry. The operator will net, screen, or cover the tanks until the operator removes the tanks from the location or the tanks no longer contain substances that could be harmful to wildlife or livestock. Use a maximum netting mesh size of 1 ½ inches. The netting must not be in contact with fluids and must not have holes or gaps.

Chemical and Fuel Secondary Containment and Exclosure Screening

The operator will prevent all hazardous, poisonous, flammable, and toxic substances from coming into contact with soil and water. At a minimum, the operator will install and maintain an impervious secondary containment system for any tank or barrel containing hazardous, poisonous, flammable, or toxic substances sufficient to contain the contents of the tank or barrel and any drips, leaks, and anticipated precipitation. The operator will dispose of fluids within the containment system that do not meet applicable state or U. S. Environmental Protection Agency livestock water standards in accordance with state law; the operator must not drain the fluids to the soil or ground. The operator will design, construct, and maintain all secondary containment systems to prevent wildlife and livestock exposure to harmful substances. At a minimum, the operator will install effective wildlife and livestock exclosure systems such as fencing, netting, expanded metal mesh, lids, and grate covers. Use a maximum netting mesh size of 1 ½ inches.

Open-Vent Exhaust Stack Exclosures

The operator will construct, modify, equip, and maintain all open-vent exhaust stacks on production equipment to prevent birds and bats from entering, and to discourage perching, roosting, and nesting. (*Recommended exclosure structures on open-vent exhaust stacks are in the shape of a cone.*) Production equipment includes, but may not be limited to, tanks, heater-treaters, separators, dehydrators, flare stacks, in-line units, and compressor mufflers.

Containment Structures

Proposed production facilities such as storage tanks and other vessels will have a secondary containment structure that is constructed to hold the capacity of 1.5 times the largest tank, plus freeboard to account for precipitation, unless more stringent protective requirements are deemed necessary.

Painting Requirement

All above-ground structures including meter housing that are not subject to safety requirements shall be painted a flat non-reflective paint color, **Shale Green** from the BLM Standard Environmental Color Chart (CC-001: June 2008).

B. PIPELINES

BURIED PIPELINE STIPULATIONS

A copy of the application (Grant, APD, or Sundry Notice) and attachments, including conditions of approval, survey plat and/or map, will be on location during construction. BLM personnel may request to you a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

1. The Holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.
2. The Holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, the holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC 2601 *et seq.* (1982) with regards to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant. (See 40 CFR Part 702-799 and especially, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193.) Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the authorized officer concurrent with the filing of the reports to the involved Federal agency or State government.
3. The holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. 9601, *et seq.* or the Resource Conservation and Recovery Act, 42 U.S.C.6901, *et seq.*) on the Right-of-Way (unless the release or threatened release is wholly unrelated to the Right-of-Way holder's activity on the Right-of-Way), or resulting from the activity of

the Right-of-Way holder on the Right-of-Way. This agreement applies without regard to whether a release is caused by the holder, its agent, or unrelated third parties.

4. If, during any phase of the construction, operation, maintenance, or termination of the pipeline, any oil or other pollutant should be discharged from the pipeline system, impacting Federal lands, the control and total removal, disposal, and cleaning up of such oil or other pollutant, wherever found, shall be the responsibility of holder, regardless of fault. Upon failure of holder to control, dispose of, or clean up such discharge on or affecting Federal lands, or to repair all damages resulting therefrom, on the Federal lands, the Authorized Officer may take such measures as he deems necessary to control and clean up the discharge and restore the area, including where appropriate, the aquatic environment and fish and wildlife habitats, at the full expense of the holder. Such action by the Authorized Officer shall not relieve holder of any responsibility as provided herein.

5. All construction and maintenance activity will be confined to the authorized right-of-way.

6. The pipeline will be buried with a minimum cover of 36 inches between the top of the pipe and ground level.

7. The maximum allowable disturbance for construction in this right-of-way will be 30 feet:

- Blading of vegetation within the right-of-way will be allowed: maximum width of blading operations will not exceed 20 feet. The trench is included in this area. (*Blading is defined as the complete removal of brush and ground vegetation.*)
- Clearing of brush species within the right-of-way will be allowed: maximum width of clearing operations will not exceed 30 feet. The trench and bladed area are included in this area. (*Clearing is defined as the removal of brush while leaving ground vegetation (grasses, weeds, etc.) intact. Clearing is best accomplished by holding the blade 4 to 6 inches above the ground surface.*)
- The remaining area of the right-of-way (if any) shall only be disturbed by compressing the vegetation. (*Compressing can be caused by vehicle tires, placement of equipment, etc.*)

8. The holder shall stockpile an adequate amount of topsoil where blading is allowed. The topsoil to be stripped is approximately 6 inches in depth. The topsoil will be segregated from other spoil piles from trench construction. The topsoil will be evenly distributed over the bladed area for the preparation of seeding.

9. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting of the fence. No permanent gates will be allowed unless approved by the Authorized Officer.

10. Vegetation, soil, and rocks left as a result of construction or maintenance activity will be randomly scattered on this right-of-way and will not be left in rows, piles, or berms, unless otherwise approved by the Authorized Officer. The entire right-of-way shall be recontoured to match the surrounding landscape. The backfilled soil shall be compacted and a 6 inch berm will be left over the ditch line to allow for settling back to grade.

11. In those areas where erosion control structures are required to stabilize soil conditions, the holder will install such structures as are suitable for the specific soil conditions being encountered and which are in accordance with sound resource management practices.

12. The holder will reseed all disturbed areas. Seeding will be done according to the attached seeding requirements, using the following seed mix.

- | | |
|--|--|
| <input checked="" type="checkbox"/> seed mixture 1 | <input type="checkbox"/> seed mixture 3 |
| <input type="checkbox"/> seed mixture 2 | <input type="checkbox"/> seed mixture 4 |
| <input type="checkbox"/> seed mixture 2/LPC | <input type="checkbox"/> Aplomado Falcon Mixture |

13. All above-ground structures not subject to safety requirements shall be painted by the holder to blend with the natural color of the landscape. The paint used shall be color which simulates "Standard Environmental Colors" – **Shale Green**, Munsell Soil Color No. 5Y 4/2.

14. The pipeline will be identified by signs at the point of origin and completion of the right-of-way and at all road crossings. At a minimum, signs will state the holder's name, BLM serial number, and the product being transported. All signs and information thereon will be posted in a permanent, conspicuous manner, and will be maintained in a legible condition for the life of the pipeline.

15. The holder shall not use the pipeline route as a road for purposes other than routine maintenance as determined necessary by the Authorized Officer in consultation with the holder before maintenance begins. The holder will take whatever steps are necessary to ensure that the pipeline route is not used as a roadway. As determined necessary during the life of the pipeline, the Authorized Officer may ask the holder to construct temporary deterrence structures.

16. Any cultural and/or paleontological resources (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the Authorized Officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery will be made by the Authorized Officer to determine appropriate actions to prevent the loss of significant cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the Authorized Officer after consulting with the holder.

17. The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes associated roads, pipeline corridor and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

18. Escape Ramps - The operator will construct and maintain pipeline/utility trenches [that are not otherwise fenced, screened, or netted] to prevent livestock, wildlife, and humans from becoming entrapped. At a minimum, the operator will construct and maintain escape ramps, ladders, or other methods of avian and terrestrial wildlife escape in the trenches according to the following criteria:

- a. Any trench left open for eight (8) hours or less is not required to have escape ramps; however, before the trench is backfilled, the contractor/operator shall inspect the trench for wildlife, remove all trapped wildlife, and release them at least 100 yards from the trench.
- b. For trenches left open for eight (8) hours or more, earthen escape ramps (built at no more than a 30 degree slope and spaced no more than 500 feet apart) shall be placed in the trench.

STANDARD STIPULATIONS FOR SURFACE INSTALLED PIPELINES

A copy of the Grant and attachments, including stipulations, survey plat(s) and/or map(s), shall be on location during construction. BLM personnel may request to review a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

1. Holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.

2. Holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, Holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC § 2601 *et seq.* (1982) with regard to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant (*see* 40 CFR, Part 702-799 and in particular, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193). Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR, Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the Authorized Officer concurrent with the filing of the reports to the involved Federal agency or State government.

3. Holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. § 9601, *et seq.* or the Resource Conservation and Recovery Act, 42 U.S.C. 6901, *et seq.*) on the Right-of-Way (unless the release or threatened release is wholly unrelated to activity of the Right-of-Way Holder's activity on the Right-of-Way), or resulting from the activity of the Right-of-Way Holder on the Right-of-Way. This provision applies without regard to whether a release is caused by Holder, its agent, or unrelated third parties.

4. Holder shall be liable for damage or injury to the United States to the extent provided by 43 CFR Sec. 2883.1-4. Holder shall be held to a standard of strict liability for damage or injury to the United States resulting from pipe rupture, fire, or spills caused or substantially aggravated by any of the following within the right-of-way or permit area:

- a. Activities of Holder including, but not limited to: construction, operation, maintenance, and termination of the facility;
- b. Activities of other parties including, but not limited to:
 - (1) Land clearing
 - (2) Earth-disturbing and earth-moving work
 - (3) Blasting
 - (4) Vandalism and sabotage;

c. Acts of God.

The maximum limitation for such strict liability damages shall not exceed one million dollars (\$1,000,000) for any one event, and any liability in excess of such amount shall be determined by the ordinary rules of negligence of the jurisdiction in which the damage or injury occurred.

This section shall not impose strict liability for damage or injury resulting primarily from an act of war or from the negligent acts or omissions of the United States.

5. If, during any phase of the construction, operation, maintenance, or termination of the pipeline, any oil, salt water, or other pollutant should be discharged from the pipeline system, impacting Federal lands, the control and total removal, disposal, and cleaning up of such oil, salt water, or other pollutant, wherever found, shall be the responsibility of Holder, regardless of fault. Upon failure of Holder to control, dispose of, or clean up such discharge on or affecting Federal lands, or to repair all damages resulting therefrom, on the Federal lands, the Authorized Officer may take such measures as he/she deems necessary to control and clean up the discharge and restore the area, including, where appropriate, the aquatic environment and fish and wildlife habitats, at the full expense of Holder. Such action by the Authorized Officer shall not relieve Holder of any responsibility as provided herein.

6. All construction and maintenance activity shall be confined to the authorized right-of-way width of 20 feet. If the pipeline route follows an existing road or buried pipeline right-of-way, the surface pipeline shall be installed no farther than 10 feet from the edge of the road or buried pipeline right-of-way. If existing surface pipelines prevent this distance, the proposed surface pipeline shall be installed immediately adjacent to the outer surface pipeline. All construction and maintenance activity shall be confined to existing roads or right-of-ways.

7. No blading or clearing of any vegetation shall be allowed unless approved in writing by the Authorized Officer.

8. Holder shall install the pipeline on the surface in such a manner that will minimize suspension of the pipeline across low areas in the terrain. In hummocky or dune areas, the pipeline shall be "snaked" around hummocks and dunes rather than suspended across these features.

9. The pipeline shall be buried with a minimum of 24 inches under all roads, "two-tracks," and trails. Burial of the pipe will continue for 20 feet on each side of each crossing. The condition of the road, upon completion of construction, shall be returned to at least its former state with no bumps or dips remaining in the road surface.

10. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When

necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting of the fence. No permanent gates will be allowed unless approved by the Authorized Officer.

11. In those areas where erosion control structures are required to stabilize soil conditions, the holder will install such structures as are suitable for the specific soil conditions being encountered and which are in accordance with sound resource management practices.

12. Excluding the pipe, all above-ground structures not subject to safety requirement shall be painted by the holder to blend with the natural color of the landscape. The paint used shall be a color which simulates "Standard Environmental Colors" – **Shale Green**, Munsell Soil Color No. 5Y 4/2; designated by the Rocky Mountain Five State Interagency Committee.

13. The pipeline will be identified by signs at the point of origin and completion of the right-of-way and at all road crossings. At a minimum, signs will state the holder's name, BLM serial number, and the product being transported. Signs will be maintained in a legible condition for the life of the pipeline.

14. The holder shall not use the pipeline route as a road for purposes other than routine maintenance as determined necessary by the Authorized Officer in consultation with the holder. The holder will take whatever steps are necessary to ensure that the pipeline route is not used as a roadway.

15. Any cultural and/or paleontological resource (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the authorized officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the authorized officer. An evaluation of the discovery will be made by the authorized officer to determine appropriate cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the authorized officer after consulting with the holder.

16. The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, powerline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

17. Surface pipelines shall be less than or equal to 4 inches and a working pressure below 125 psi.

C. ELECTRIC LINES

STANDARD STIPULATIONS FOR OVERHEAD ELECTRIC DISTRIBUTION

LINES

A copy of the grant and attachments, including stipulations, survey plat and/or map, will be on location during construction. BLM personnel may request to you a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

1. The holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.
2. The holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, the holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC 2601 et seq. (1982) with regards to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant. (See 40 CFR, Part 702-799 and especially, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193.) Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR, Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the authorized officer concurrent with the filing of the reports to the involved Federal agency or State government.
3. The holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. 9601, et seq. or the Resource Conservation and Recovery Act, 42 U.S.C. 6901, et seq.) on the Right-of-Way (unless the release or threatened release is wholly unrelated to the Right-of-Way holder's activity on the Right-of-Way), or resulting from the activity of the Right-of-Way holder on the Right-of-Way. This agreement applies without regard to whether a release is caused by the holder, its agent, or unrelated third parties.
4. There will be no clearing or blading of the right-of-way unless otherwise agreed to in writing by the Authorized Officer.
5. Power lines shall be constructed and designed in accordance to standards outlined in "Suggested Practices for Avian Protection on Power lines: The State of the Art in 2006" Edison Electric Institute, APLIC, and the California Energy Commission 2006 . The holder shall assume the burden and expense of proving that pole designs not shown in the above publication deter raptor perching, roosting, and nesting. Such proof shall be provided by a raptor expert approved by the Authorized Officer. The BLM reserves the right to require modification or additions to all powerline structures placed on this right-of-way, should they be necessary to ensure the safety of large perching birds. Such

modifications and/or additions shall be made by the holder without liability or expense to the United States.

Raptor deterrence will consist of but not limited to the following: triangle perch discouragers shall be placed on each side of the cross arms and a nonconductive perching deterrence shall be placed on all vertical poles that extend past the cross arms.

6. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting the fence. No permanent gates will be allowed unless approved by the Authorized Officer.

7. The BLM serial number assigned to this authorization shall be posted in a permanent, conspicuous manner where the power line crosses roads and at all serviced facilities. Numbers will be at least two inches high and will be affixed to the pole nearest the road crossing and at the facilities served.

8. Upon cancellation, relinquishment, or expiration of this grant, the holder shall comply with those abandonment procedures as prescribed by the Authorized Officer.

9. All surface structures (poles, lines, transformers, etc.) shall be removed within 180 days of abandonment, relinquishment, or termination of use of the serviced facility or facilities or within 180 days of abandonment, relinquishment, cancellation, or expiration of this grant, whichever comes first. This will not apply where the power line extends service to an active, adjoining facility or facilities.

10. Any cultural and/or paleontological resource (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the Authorized Officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery will be made by the Authorized Officer to determine appropriate actions to prevent the loss of significant cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the Authorized Officer after consulting with the holder.

11. Special Stipulations:

- For reclamation remove poles, lines, transformer, etc. and dispose of properly.
- Fill in any holes from the poles removed.

VIII. INTERIM RECLAMATION

During the life of the development, all disturbed areas not needed for active support of production operations should undergo interim reclamation in order to minimize the environmental impacts of development on other resources and uses.

Within six (6) months of well completion, operators should work with BLM surface management specialists (Jim Amos: 575-234-5909) to devise the best strategies to reduce the size of the location. Interim reclamation should allow for remedial well operations, as well as safe and efficient removal of oil and gas.

During reclamation, the removal of caliche is important to increasing the success of revegetating the site. Removed caliche that is free of contaminants may be used for road repairs, fire walls or for building other roads and locations. In order to operate the well or complete workover operations, it may be necessary to drive, park and operate on restored interim vegetation within the previously disturbed area. Disturbing revegetated areas for production or workover operations will be allowed. If there is significant disturbance and loss of vegetation, the area will need to be revegetated. Communicate with the appropriate BLM office for any exceptions/exemptions if needed.

All disturbed areas after they have been satisfactorily prepared need to be reseeded with the seed mixture provided below.

Upon completion of interim reclamation, the operator shall submit a Sundry Notices and Reports on Wells, Subsequent Report of Reclamation (Form 3160-5).

IX. FINAL ABANDONMENT & RECLAMATION

At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land are restored.

Earthwork for final reclamation must be completed within six (6) months of well plugging. All pads, pits, facility locations and roads must be reclaimed to a satisfactory revegetated, safe, and stable condition, unless an agreement is made with the landowner or BLM to keep the road and/or pad intact.

After all disturbed areas have been satisfactorily prepared, these areas need to be revegetated with the seed mixture provided below. Seeding should be accomplished by drilling on the contour whenever practical or by other approved methods. Seeding may need to be repeated until revegetation is successful, as determined by the BLM.

Operators shall contact a BLM surface protection specialist prior to surface abandonment operations for site specific objectives (Jim Amos: 575-234-5909).

Seed Mixture 1 for Loamy Sites

Holder shall seed all disturbed areas with the seed mixture listed below. The seed mixture shall be planted in the amounts specified in pounds of pure live seed (PLS)* per acre. There shall be no primary or secondary noxious weeds in the seed mixture. Seed shall be tested and the viability testing of seed will be done in accordance with State law(s) and within nine (9) months prior to purchase. Commercial seed shall be either certified or registered seed. The seed container shall be tagged in accordance with State law(s) and available for inspection by the Authorized Officer.

Seed shall be planted using a drill equipped with a depth regulator to ensure proper depth regulator to ensure proper depth of planting where drilling is possible. The seed mixture shall be evenly and uniformly planted over the disturbed area (small/heavier seeds have a tendency to drop the bottom of the drill and are planted first). Holder shall take appropriate measures to ensure this does not occur. Where drilling is not possible, seed shall be broadcast and the area shall be raked or chained to cover the seed. When broadcasting the seed, the pounds per acre shall be doubled. The seeding shall be repeated until a satisfactory stand is established as determined by the Authorized Officer. Evaluation of growth may not be made before completion of at least one full growing season after seeding.

Species to be planted in pounds of pure live seed* per acre:

<u>Species</u>	<u>lb/acre</u>
Plains lovegrass (Eragrostis intermedia)	0.5
Sand dropseed (Sporobolus cryptandrus)	1.0
Sideoats grama (Bouteloua curtipendula)	5.0
Plains bristlegrass (Setaria macrostachya)	2.0

*Pounds of pure live seed:

Pounds of seed x percent purity x percent germination = pounds pure live seed

Operator Certification

I hereby certify that I, or someone under my direct supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exist; that I have full knowledge of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.

NAME: Amithy Crawford**Signed on:** 10/25/2017**Title:** Regulatory Analyst**Street Address:** 600 N. Marienfeld, Ste 600**City:** Midland**State:** TX**Zip:** 79701**Phone:** (432)620-1909**Email address:** acrawford@cimarex.com

Field Representative

Representative Name:**Street Address:****City:****State:****Zip:****Phone:****Email address:**

APD ID: 10400023870

Submission Date: 10/25/2017

Highlighted data
reflects the most
recent changes

Operator Name: CIMAREX ENERGY COMPANY

Well Name: DAVINCI 7-18 FEDERAL COM

Well Number: 9H

[Show Final Text](#)

Well Type: CONVENTIONAL GAS WELL

Well Work Type: Drill

Section 1 - General

APD ID: 10400023870

Tie to previous NOS?

Submission Date: 10/25/2017

BLM Office: CARLSBAD

User: Amithy Crawford

Title: Regulatory Analyst

Federal/Indian APD: FED

Is the first lease penetrated for production Federal or Indian? FED

Lease number: NMNM92167

Lease Acres: 878.57

Surface access agreement in place?

Allotted?

Reservation:

Agreement in place? NO

Federal or Indian agreement:

Agreement number:

Agreement name:

Keep application confidential? YES

Permitting Agent? NO

APD Operator: CIMAREX ENERGY COMPANY

Operator letter of designation:

Operator Info

Operator Organization Name: CIMAREX ENERGY COMPANY

Operator Address: 202 S. Cheyenne Ave., Ste 1000

Zip: 74103

Operator PO Box:

Operator City: Tulsa

State: OK

Operator Phone: (432)620-1936

Operator Internet Address: tstathem@cimarex.com**Section 2 - Well Information**

Well in Master Development Plan? NO

Mater Development Plan name:

Well in Master SUPO? NO

Master SUPO name:

Well in Master Drilling Plan? NO

Master Drilling Plan name:

Well Name: DAVINCI 7-18 FEDERAL COM

Well Number: 9H

Well API Number:

Field/Pool or Exploratory? Field and Pool

Field Name: WOLFCAMP

Pool Name: PURPLE SAGE
WOLFCAMP GAS

Is the proposed well in an area containing other mineral resources? USEABLE WATER,NATURAL GAS,OIL

Operator Name: CIMAREX ENERGY COMPANY

Well Name: DAVINCI 7-18 FEDERAL COM

Well Number: 9H

Describe other minerals:

Is the proposed well in a Helium production area? N Use Existing Well Pad? YES New surface disturbance? N

Type of Well Pad: MULTIPLE WELL

Multiple Well Pad Name: DAVINCI 7-18 FEDERAL COM

Number: 6H-13H

Well Class: HORIZONTAL

Number of Legs: 1

Well Work Type: Drill

Well Type: CONVENTIONAL GAS WELL

Describe Well Type:

Well sub-Type: EXPLORATORY (WILDCAT)

Describe sub-type:

Distance to town:

Distance to nearest well: 20 FT

Distance to lease line: 330 FT

Reservoir well spacing assigned acres Measurement: 635.36 Acres

Well plat: Davinci_7_18_Federal_Com_9H_C102_20171024095722.pdf

Well work start Date: 02/01/2018

Duration: 30 DAYS

Section 3 - Well Location Table

Survey Type: RECTANGULAR

Describe Survey Type:

Datum: NAD83

Vertical Datum: NAVD88

Survey number:

	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD
SHL Leg #1	410	FSL	1050	FWL	25S	27E	6	Lot 7	32.1529	-104.234597	EDD Y	NEW MEXI CO	NEW MEXI CO	F	NMNM 110348	3279	0	0
KOP Leg #1	410	FSL	1050	FWL	25S	27E	6	Lot 7	32.1529	-104.234597	EDD Y	NEW MEXI CO	NEW MEXI CO	F	NMNM 110348	-5930	9245	9209
PPP Leg #1	0	FNL	380	FWL	25S	27E	7	Lot 1	32.151928	-104.236714	EDD Y	NEW MEXI CO	NEW MEXI CO	F	NMNM 92167	-6384	9870	9663

Operator Name: CIMAREX ENERGY COMPANY

Well Name: DAVINCI 7-18 FEDERAL COM

Well Number: 9H

	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD
PPP Leg #1	2648	FNL	380	FWL	25S	27E	7	Lot 3	32.14711	-104.236722	EDD Y	NEW MEXICO	NEW MEXICO	F	NMNM 93471	-6442	12500	9721
PPP Leg #1	2651	FNL	380	FWL	25S	27E	18	Lot 3	32.130117	-104.236739	EDD Y	NEW MEXICO	NEW MEXICO	F	NMNM 111530	-6463	17800	9742
PPP Leg #1	0	FNL	380	FWL	25S	27E	18	Lot 1	32.137289	-104.236731	EDD Y	NEW MEXICO	NEW MEXICO	F	NMNM 94842	-6453	15200	9732
EXIT Leg #1	330	FSL	380	FWL	25S	27E	18	Lot 4	32.123533	-104.236747	EDD Y	NEW MEXICO	NEW MEXICO	F	NMNM 111530	-6473	20205	9752
BHL Leg #1	330	FSL	380	FWL	25S	27E	18	Lot 4	32.123533	-104.236747	EDD Y	NEW MEXICO	NEW MEXICO	F	NMNM 111530	-6473	20205	9752

Operator Name: CIMAREX ENERGY COMPANY

Well Name: DAVINCI 7-18 FEDERAL COM

Well Number: 9H

Testing Procedure: A multi-bowl wellhead system will be utilized. After running the 13-3/8" surface casing, a 13 5/8" BOP/BOPE system with a minimum working pressure of 5000 psi will be installed on the wellhead system and will be pressure tested to 250 psi low followed by a 5000 psi test. Annular will be tested to 50% of working pressure. The pressure test will be repeated at least every 30 days, as per Onshore Order No. 2. The multi-bowl wellhead will be installed by vendor's representative. A copy of the installation instructions has been sent to the BLM field office. The wellhead will be installed by a third-party welder while being monitored by the wellhead vendor representative. All BOP equipment will be tested utilizing a conventional test plug. Not a cup or J-packer type. A solid steel body pack-off will be utilized after running and cementing the intermediate casing. After installation the pack-off and lower flange will be pressure tested to 5000 psi. A solid steel body pack-off will be utilized after running and cementing the production casing. After installation the pack-off and lower flange will be pressure tested to 5000 psi. The surface casing string will be tested as per Onshore Order No. 2 to at least 0.22 psi/ft or 1500 psi, whichever is greater. The casing string utilizing steel body pack-off will be tested to 70% of casing burst. If well conditions dictate conventional slips will be set and BOPE will be tested to appropriate pressures based on permitted pressure requirements.

Choke Diagram Attachment:

Davinci_7_18_Fed_Com_9H_2M_3M_Choke_20171024125027.pdf

BOP Diagram Attachment:

Davinci_7_18_Fed_Com_9H_2M_BOP_20171024143444.pdf

Pressure Rating (PSI): 3M

Rating Depth: 2023

Equipment: A BOP consisting of three rams, including one blind ram and two pipe rams and one annular preventer. An accumulator that meets the requirements in Onshore Order #2 for the pressure rating of the BOP stack. A rotating head may be installed as needed. A Kelly clock will be installed and maintained in operable condition and a drill string safety valve in the open position will be available on the rig floor.

Requesting Variance? YES

Variance request: Co-flex line between the BOP and choke manifold. Certification for proposed co-flex hose is attached. The hose is not required by the manufacturer to be anchored. In the event the specific hose is not available, one of equal or higher rating will be used. Variance to include Hammer Union connections on lines downstream of the buffer tank only

Testing Procedure: A multi-bowl wellhead system will be utilized. After running the 13-3/8" surface casing, a 13 5/8" BOP/BOPE system with a minimum working pressure of 5000 psi will be installed on the wellhead system and will be pressure tested to 250 psi low followed by a 5000 psi test. Annular will be tested to 50% of working pressure. The pressure test will be repeated at least every 30 days, as per Onshore Order No. 2. The multi-bowl wellhead will be installed by vendor's representative. A copy of the installation instructions has been sent to the BLM field office. The wellhead will be installed by a third-party welder while being monitored by the wellhead vendor representative. All BOP equipment will be tested utilizing a conventional test plug. Not a cup or J-packer type. A solid steel body pack-off will be utilized after running and cementing the intermediate casing. After installation the pack-off and lower flange will be pressure tested to 5000 psi. A solid steel body pack-off will be utilized after running and cementing the production casing. After installation the pack-off and lower flange will be pressure tested to 5000 psi. The surface casing string will be tested as per Onshore Order No. 2 to at least 0.22 psi/ft or 1500 psi, whichever is greater. The casing string utilizing steel body pack-off will be tested to 70% of casing burst. If well conditions dictate conventional slips will be set and BOPE will be tested to appropriate pressures based on permitted pressure requirements.

Choke Diagram Attachment:

Davinci_7_18_Fed_Com_9H_2M_3M_Choke_20171024150235.pdf

BOP Diagram Attachment:

Davinci_7_18_Fed_Com_9H_3M_BOP_20171024150244.pdf

Operator Name: CIMAREX ENERGY COMPANY

Well Name: DAVINCI 7-18 FEDERAL COM

Well Number: 9H

Pressure Rating (PSI): 5M

Rating Depth: 10240

Equipment: A BOP consisting of three rams, including one blind ram and two pipe rams and one annular preventer. An accumulator that meets the requirements in Onshore Order #2 for the pressure rating of the BOP stack. A rotating head may be installed as needed. A Kelly clock will be installed and maintained in operable condition and a drill string safety valve in the open position will be available on the rig floor.

Requesting Variance? YES

Variance request: Co-flex line between the BOP and choke manifold. Certification for proposed co-flex hose is attached. The hose is not required by the manufacturer to be anchored. In the event the specific hose is not available, one of equal or higher rating will be used. Variance to include Hammer Union connections on lines downstream of the buffer tank only

Testing Procedure: A multi-bowl wellhead system will be utilized. After running the 13-3/8" surface casing, a 13 5/8" BOP/BOPE system with a minimum working pressure of 5000 psi will be installed on the wellhead system and will be pressure tested to 250 psi low followed by a 5000 psi test. Annular will be tested to 50% of working pressure. The pressure test will be repeated at least every 30 days, as per Onshore Order No. 2. The multi-bowl wellhead will be installed by vendor's representative. A copy of the installation instructions has been sent to the BLM field office. The wellhead will be installed by a third-party welder while being monitored by the wellhead vendor representative. All BOP equipment will be tested utilizing a conventional test plug. Not a cup or J-packer type. A solid steel body pack-off will be utilized after running and cementing the intermediate casing. After installation the pack-off and lower flange will be pressure tested to 5000 psi. A solid steel body pack-off will be utilized after running and cementing the production casing. After installation the pack-off and lower flange will be pressure tested to 5000 psi. The surface casing string will be tested as per Onshore Order No. 2 to at least 0.22 psi/ft or 1500 psi, whichever is greater. The casing string utilizing steel body pack-off will be tested to 70% of casing burst. If well conditions dictate conventional slips will be set and BOPE will be tested to appropriate pressures based on permitted pressure requirements.

Choke Diagram Attachment:

Davinci_7_18_Fed_Com_9H_5M_Choke_20171024150343.pdf

BOP Diagram Attachment:

Davinci_7_18_Fed_Com_9H_5M_BOP_20171024150354.pdf

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	17.5	13.375	NEW	API	N	0	450	0	450			450	OTHER	48	STC	3.59	8.4	BUOY	14.9	BUOY	14.9
2	INTERMEDIATE	12.25	9.625	NEW	API	N	0	2023	0	2023			2023	J-55	36	LTC	1.25	1.68	BUOY	2.02	BUOY	2.02
3	PRODUCTION	8.75	7.0	NEW	API	N	0	9245	0	9245			9245	L-80	26	LTC	1.25	1.68	BUOY	2.02	BUOY	2.02
4	PRODUCTION	8.75	7.0	NEW	API	N	9245	10240	9245	10240			995	L-80	26	BUTT	1.19	1.59	BUOY	45.8	BUOY	45.8

Operator Name: CIMAREX ENERGY COMPANY

Well Name: DAVINCI 7-18 FEDERAL COM

Well Number: 9H

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
5	COMPLETION SYSTEM	6	4.5	NEW	API	N	9245	20205	9245	20205			10960	HCP-110	11.6	BUTT	1.24	1.51	BUOY	62.4	BUOY	62.4

Casing Attachments

Casing ID: 1 String Type: SURFACE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Davinci_7_18_Federal_Com_9H_Casing_Assumptions_20171024150901.pdf

Casing ID: 2 String Type: INTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Davinci_7_18_Federal_Com_9H_Casing_Assumptions_20171024152100.pdf

Operator Name: CIMAREX ENERGY COMPANY

Well Name: DAVINCI 7-18 FEDERAL COM

Well Number: 9H

Casing Attachments

Casing ID: 3 **String Type:** PRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Davinci_7_18_Federal_Com_9H_Casing_Assumptions_20171024152316.pdf

Casing ID: 4 **String Type:** PRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Davinci_7_18_Federal_Com_9H_Casing_Assumptions_20171024152334.pdf

Casing ID: 5 **String Type:** COMPLETION SYSTEM

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Davinci_7_18_Federal_Com_9H_Casing_Assumptions_20171024152444.pdf

Section 4 - Cement

Operator Name: CIMAREX ENERGY COMPANY

Well Name: DAVINCI 7-18 FEDERAL COM

Well Number: 9H

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		0	450	91	1.72	13.5	156	50	Class C	Bentonite
SURFACE	Tail		0	450	195	1.34	14.8	260	25	Class C	LCM
INTERMEDIATE	Lead		0	2023	383	1.88	12.9	719	50	35:65 (POZ C)	Salt, Bentonite
INTERMEDIATE	Tail		0	2023	118	1.88	14.8	158	25	Class C	LCM
PRODUCTION	Lead		0	9245	383	3.64	10.3	1391	25	Tuned Light	LCM
PRODUCTION	Tail		0	9245	127	1.3	14.2	165	10	50:50 (POZ H)	Salt, Bentonite, Fluid Loss, Dispersant, SMS
PRODUCTION	Lead		9245	10240	383	3.64	10.3	1391	25	Tuned Light	LCM
PRODUCTION	Tail		9245	10240	127	1.3	14.2	165	10	50:50 (POZ H)	Salt, Bentonite, Fluid Loss, Dispersant, SMS
COMPLETION SYSTEM	Lead		9245	20205	724	1.3	14.2	941	10	50:50 (POZ H)	Salt, Bentonite, Fluid Loss, Dispersant, SMS

Section 5 - Circulating Medium

Mud System Type: Closed

Will an air or gas system be Used? NO

Description of the equipment for the circulating system in accordance with Onshore Order #2:

Diagram of the equipment for the circulating system in accordance with Onshore Order #2:

Describe what will be on location to control well or mitigate other conditions: Sufficient mud materials will be kept on location at all times in order to combat lost circulation or unexpected kicks. In order to run DSTs, open hole logs, and casing, the viscosity and water loss may have to be adjusted in order to meet these needs.

Describe the mud monitoring system utilized: PVT/Pason/Visual Monitoring

Circulating Medium Table

Operator Name: CIMAREX ENERGY COMPANY

Well Name: DAVINCI 7-18 FEDERAL COM

Well Number: 9H

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
0	450	SPUD MUD	8.3	8.8							
450	2023	SALT SATURATED	9.7	10.2							
2023	1024 0	OTHER : FW/Cute Brine	8.5	9							
1024 0	2020 5	OIL-BASED MUD	13.5	14							

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

No DST Planned

List of open and cased hole logs run in the well:

CNL,DS,GR

Coring operation description for the well:

N/A

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 7099

Anticipated Surface Pressure: 4953.55

Anticipated Bottom Hole Temperature(F): 168

Anticipated abnormal pressures, temperatures, or potential geologic hazards? YES

Describe:

Lost circulation may be encountered in the Delaware mountain group. Abnormal pressure as well as hole stability issues may be encountered in the Wolfcamp

Contingency Plans geohazards description:

Lost circulation material will be available, as well as additional drilling fluid along with the fluid volume in the drilling rig pit system. Drilling fluid can be mixed on location or mixed in vendor mud plant and trucked to location if needed. Sufficient barite will be available to maintain appropriate mud weight for the Wolfcamp interval.

Contingency Plans geohazards attachment:

Hydrogen Sulfide drilling operations plan required? YES

Hydrogen sulfide drilling operations plan:

Davinci_7_18_Federal_Com_9H_H2S_Plan_20171024153720.pdf

Operator Name: CIMAREX ENERGY COMPANY

Well Name: DAVINCI 7-18 FEDERAL COM

Well Number: 9H

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

Davinci_7_18_Federal_Com_9H_Directional_Survey_20171024153837.pdf

Other proposed operations facets description:


No gas Capture plan will be attached as this is a Gas well. Per 3162.3 drilling applications, require all Oil wells submit a Waste Minimization plan

Other proposed operations facets attachment:

Other Variance attachment:

Davinci_7_18_Federal_Com_9H_Drilling_Plan_20171024153902.pdf

Davinci_7_18_Federal_Com_9H_Flex_Hose_20171024153928.pdf

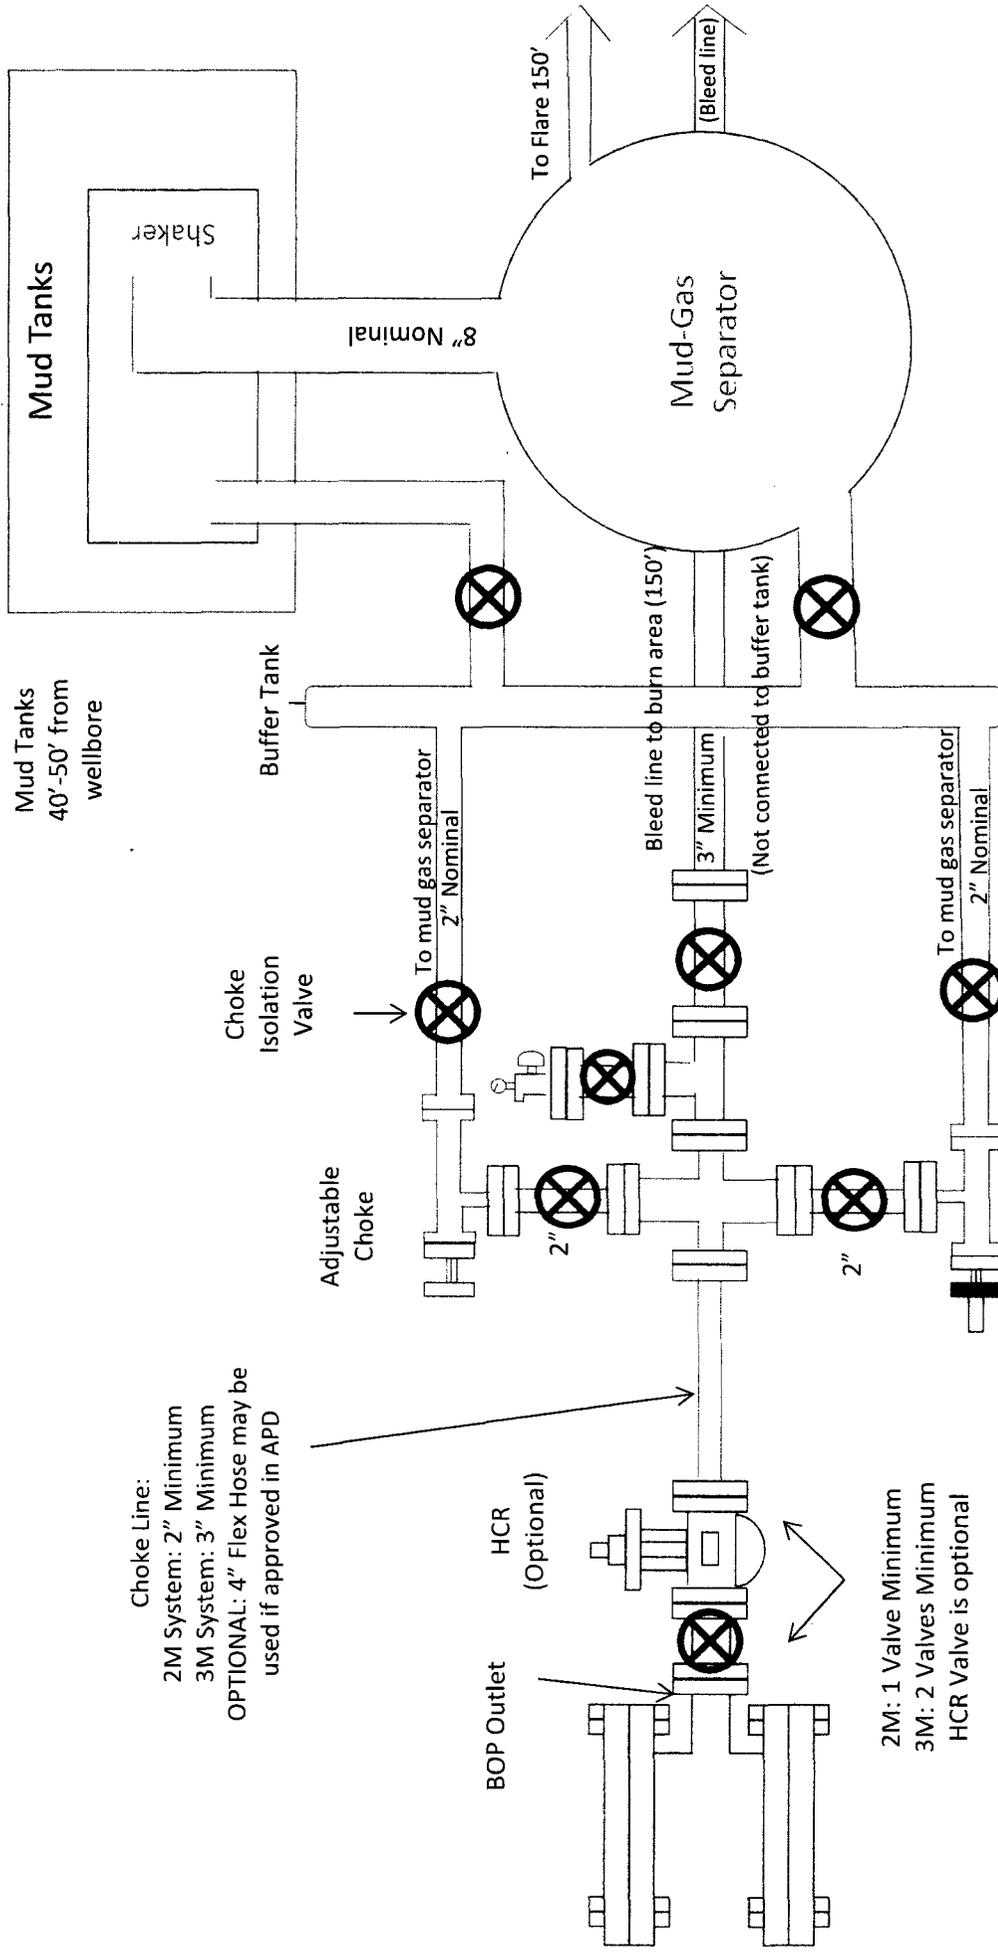

Choke Line:
 2M System: 2" Minimum
 3M System: 3" Minimum
 OPTIONAL: 4" Flex Hose may be used if approved in APD

BOP Outlet
 HCR (Optional)

2M: 1 Valve Minimum
 3M: 2 Valves Minimum
 HCR Valve is optional

REMOTELY OPERATED Adjustable Choke

Choke Isolation Valve

Exhibit E-1 - Choke Manifold
 Diagram Davinic 7-18 Federal Com 9H
 Cimarex Energy Co.
 6-25S-27E
 Eddy County, NM

**Drilling Operations
 Choke Manifold
 2M/3M Service**

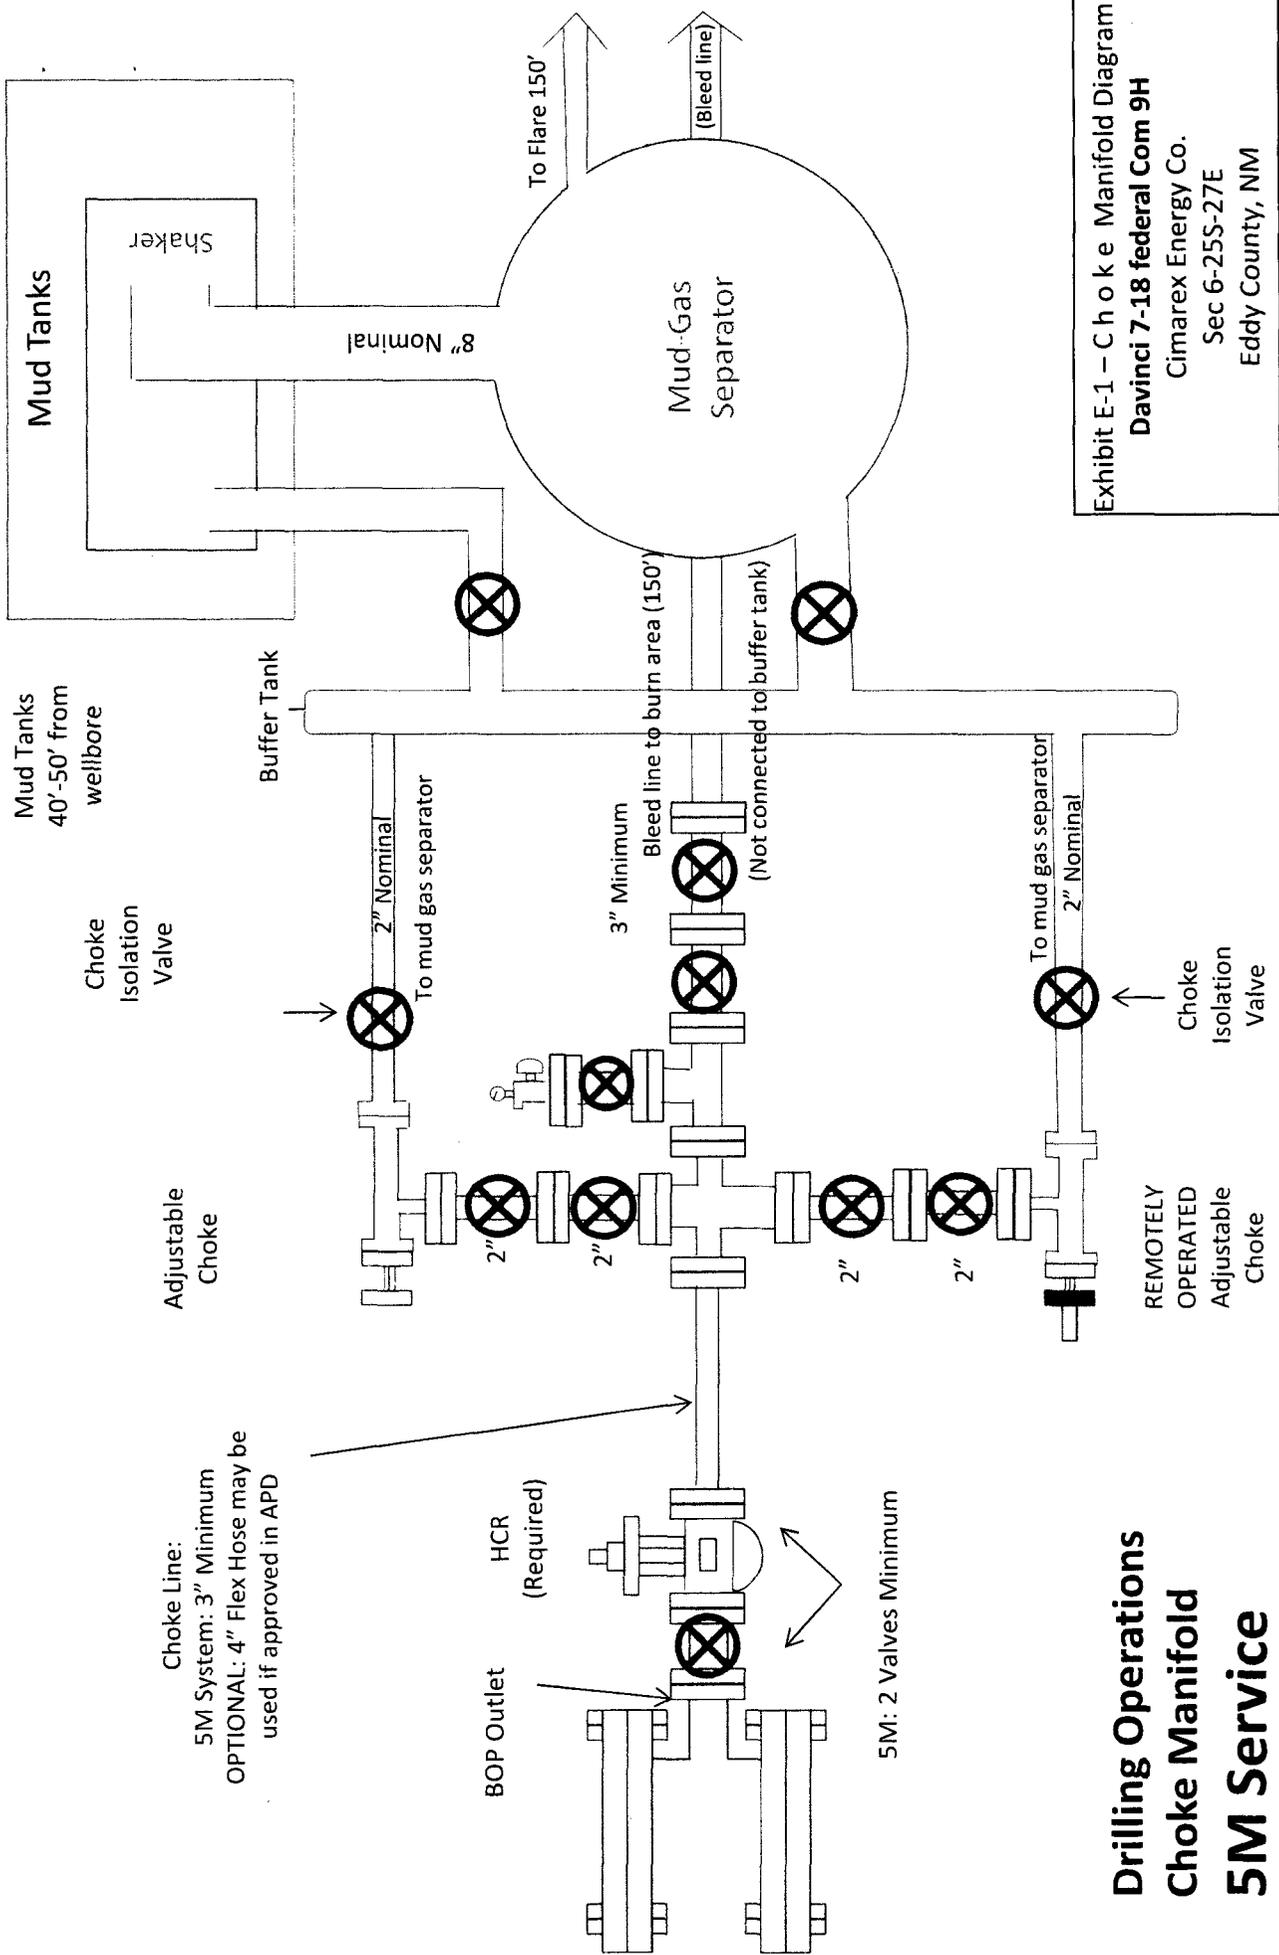


Exhibit E-1 – Choke Manifold Diagram
Davinci 7-18 federal Com 9H
 Cimarex Energy Co.
 Sec 6-25S-27E
 Eddy County, NM

Drilling 12-1/4" hole
below 13 3/8" Casing

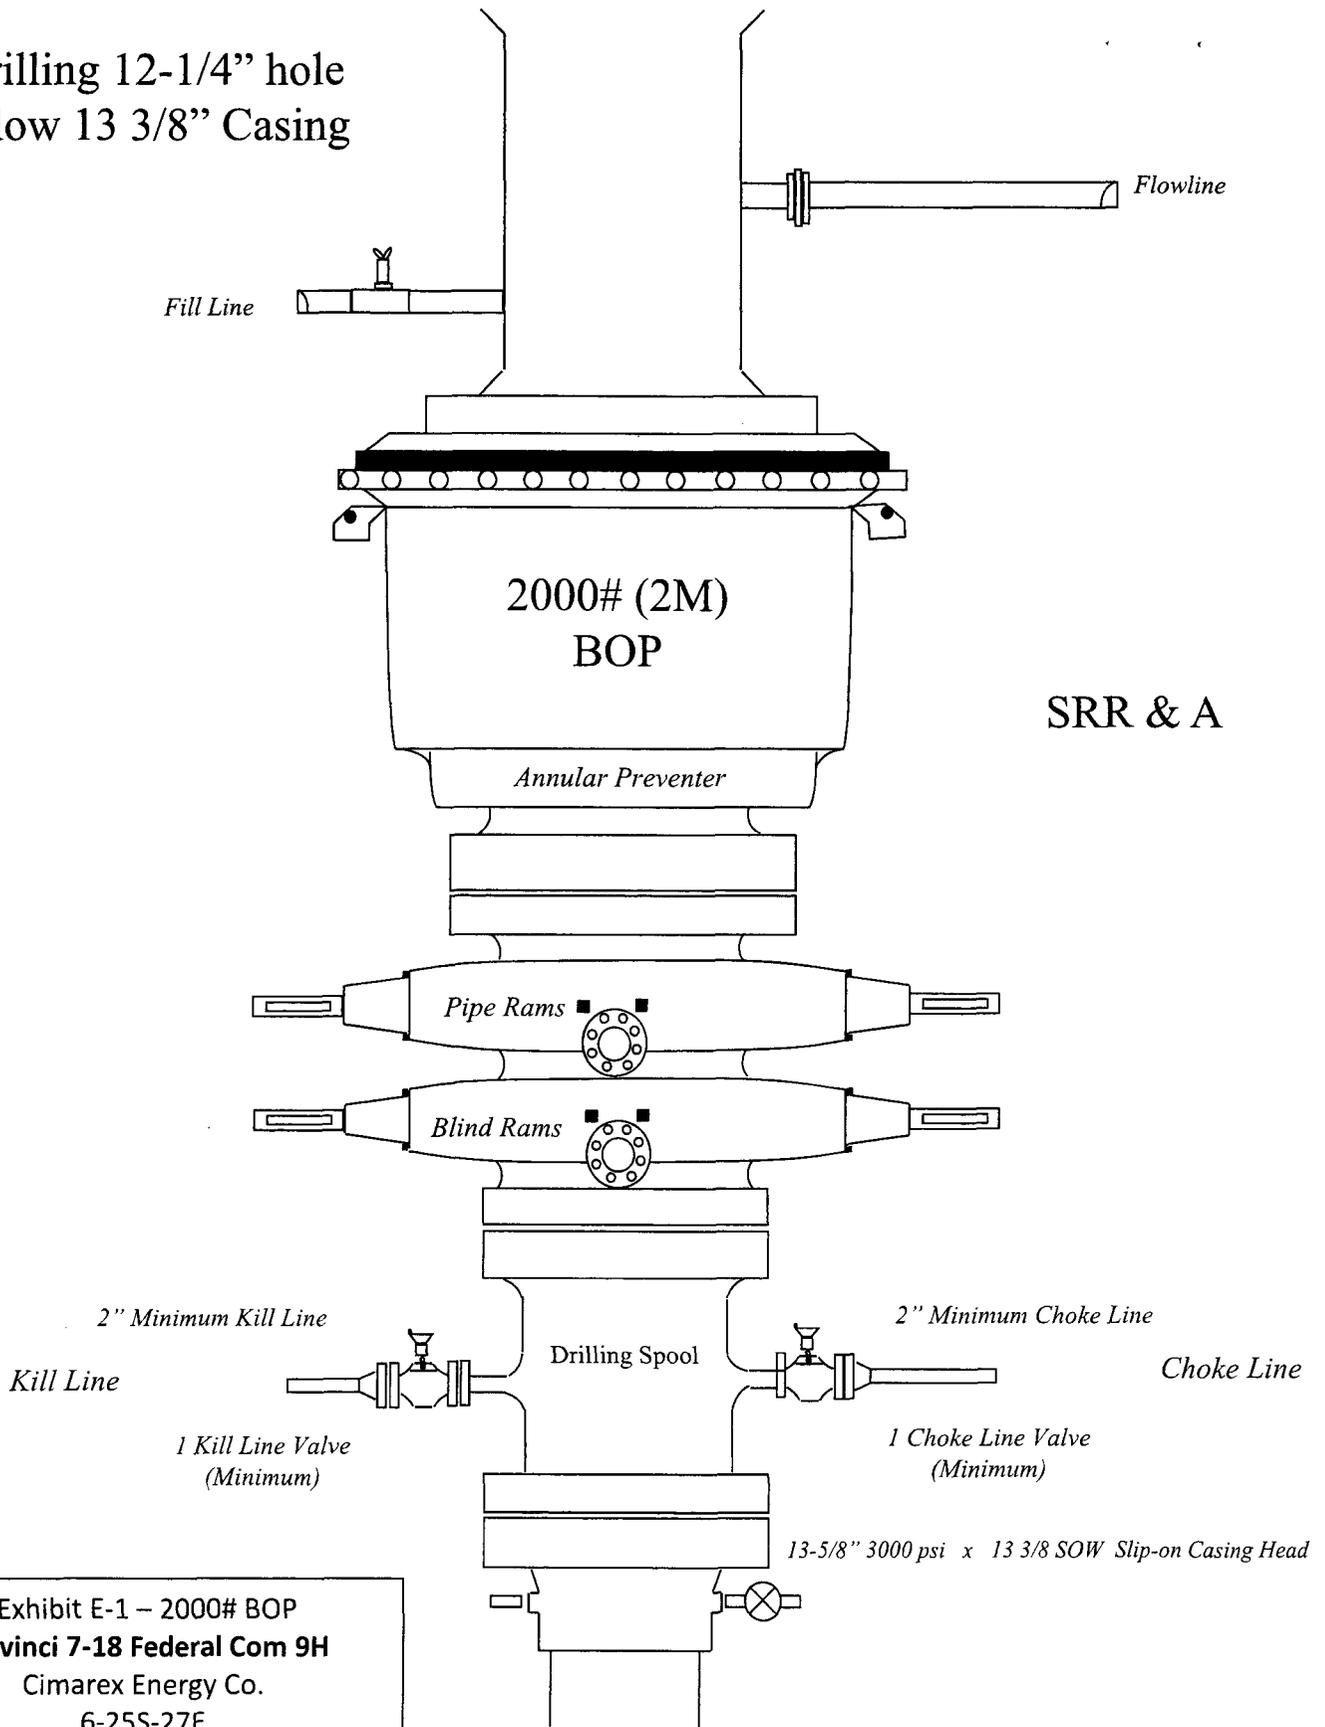


Exhibit E-1 – 2000# BOP
Davinci 7-18 Federal Com 9H
Cimarex Energy Co.
6-25S-27E
Eddy, NM

Drilling 8-3/4" hole
below 9 5/8" Casing

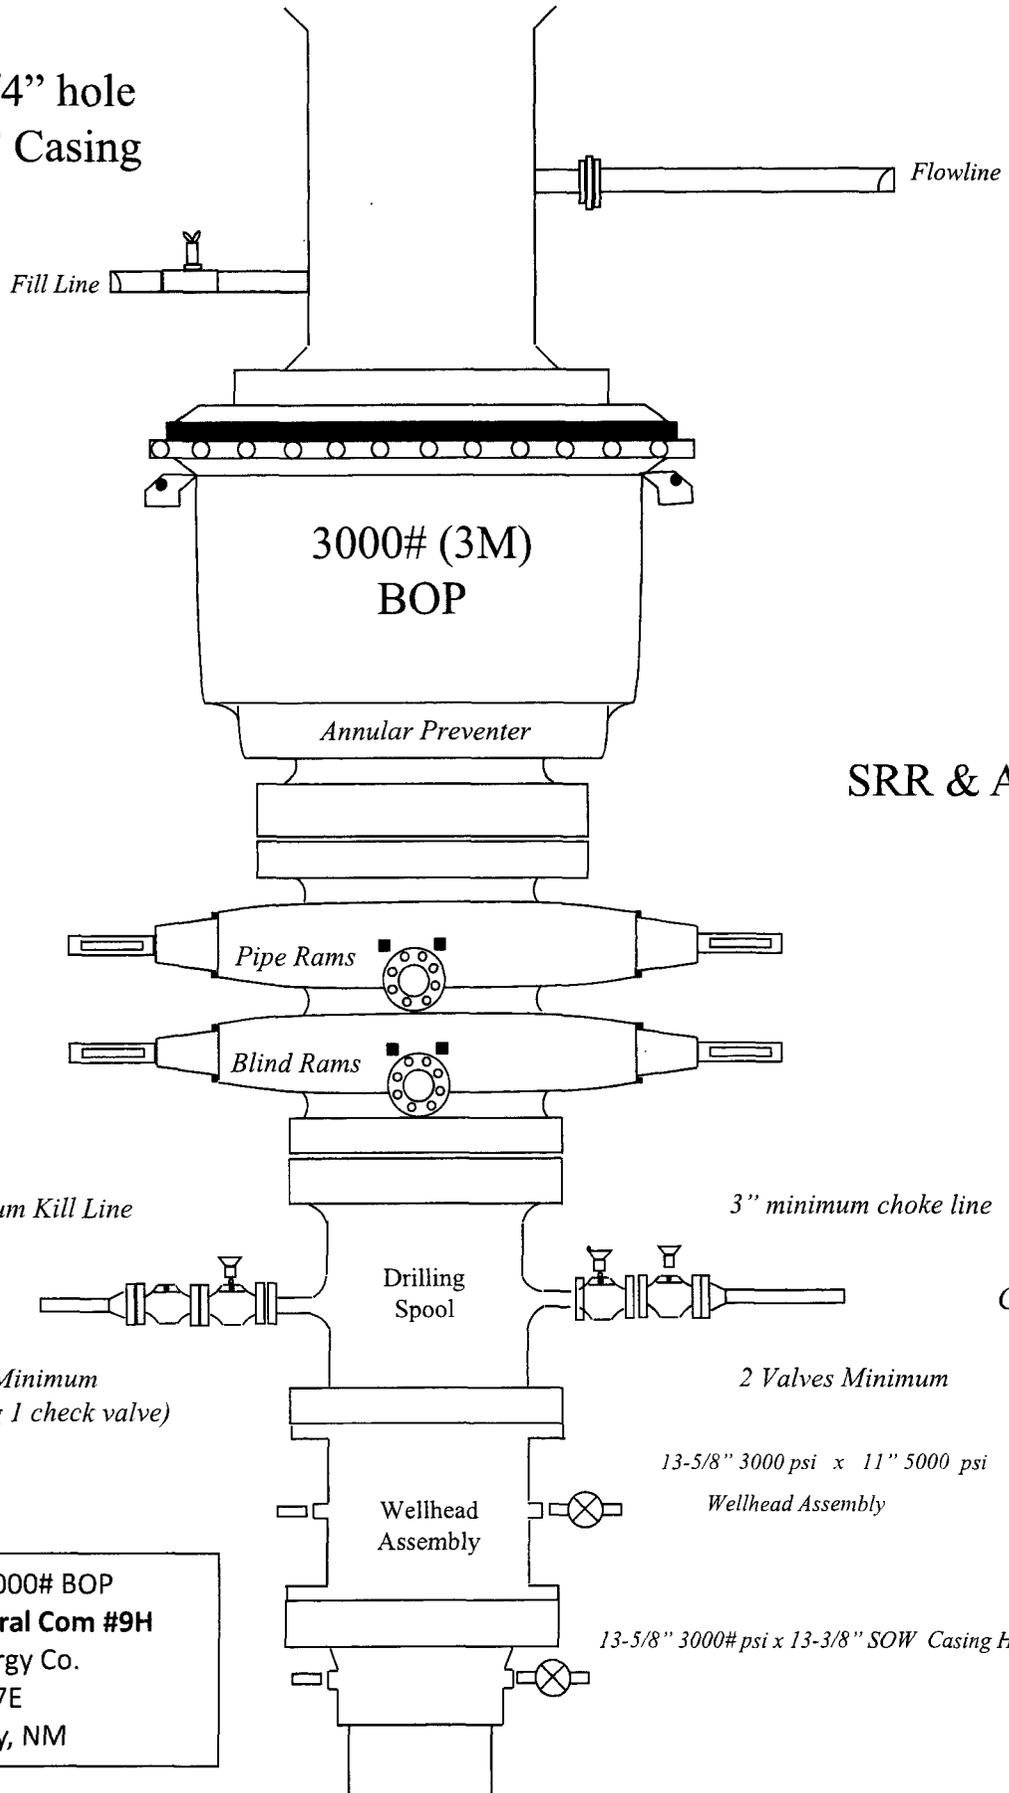


Exhibit E-1 – 3000# BOP
Davinci 7-18 Federal Com #9H
Cimarex Energy Co.
6-25S-27E
Eddy County, NM

Drilling 6" hole below 7" Casing

Fill Line

Flowline

5000# (5M)
BOP

Annular Preventer

SRR & A

Pipe Rams

Blind Rams

2" Minimum Kill Line

Kill Line

2 Valves and a check valve

Drilling Spool

3" minimum choke line

Choke Line

2 Valves Minimum

(HCR Required)

Wellhead Assembly

11" 5000 psi x 7-1/16" 10,000 psi
Wellhead Assembly


Wellhead Assembly

13-5/8" 3000 psi x 11" 5000 psi
Wellhead Assembly

Wellhead Assembly

13-5/8" 3000# psi x 13-3/8" SOW Casing Head

Exhibit E-1 – 5000# BOP
Davinci 7-18 Federal Com #9H
Cimarex Energy Co.
Sec 6-25S-27E
Eddy County, NM

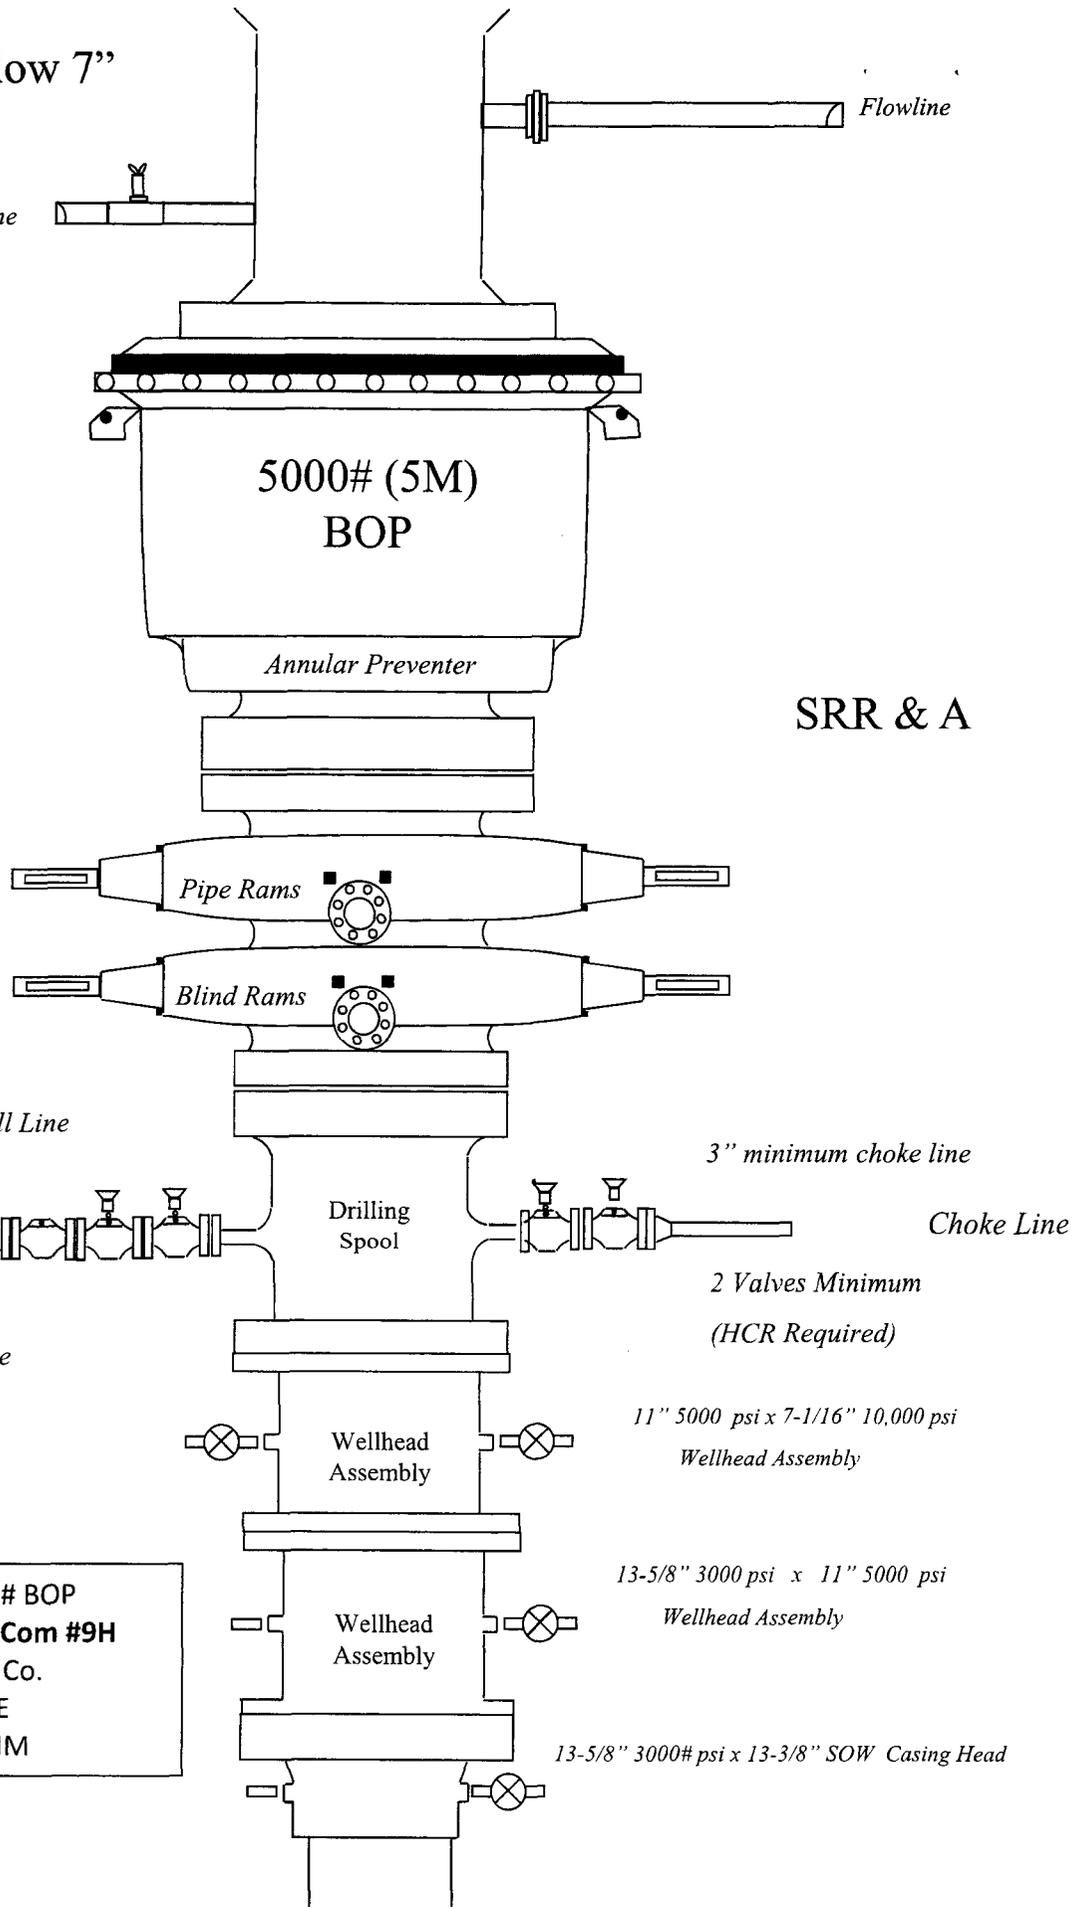

Davinci 7-18 Fed Com 9H

Casing Assumptions

2. Casing Program

Hole Size	Casing Depth From	Casing Depth To	Casing Size	Weight (lb/ft)	Grade	Conn.	SF Collapse	SF Burst	SF Tension
17 1/2	0	450	13-3/8"	48.00	H-40/J-55 Hybrid	ST&C	3.59	8.40	14.91
12 1/4	0	2023	9-5/8"	36.00	J-55	LT&C	1.88	3.28	6.22
8 3/4	0	9245	7"	26.00	L-80	LT&C	1.25	1.68	2.02
8 3/4	9245	10240	7"	26.00	L-80	BT&C	1.19	1.59	45.82
6	9245	20205	4-1/2"	11.60	HCP-110	BT&C	1.24	1.51	62.40
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet

Hydrogen Sulfide Drilling Operations Plan

Davinci 7-18 Federal Com 9H

Cimarex Energy Co.

Lot # 7, Sec. 6, 25S, 27E

Eddy Co., NM

- 1 All Company and Contract personnel admitted on location must be trained by a qualified H₂S safety instructor to the following:
 - A. Characteristics of H₂S
 - B. Physical effects and hazards
 - C. Principal and operation of H₂S detectors, warning system and briefing areas.
 - D. Evacuation procedure, routes and first aid.
 - E. Proper use of safety equipment & life support systems
 - F. Essential personnel meeting Medical Evaluation criteria will receive additional training on the proper use of 30 minute pressure demand air packs.

H₂S Detection and Alarm Systems:

 - A. H₂S sensors/detectors to be located on the drilling rig floor, in the base of the sub structure/cellar area, on the mud pits in the shale shaker area. Additional H₂S detectors may play placed as deemed necessary.
 - B. An audio alarm system will be installed on the derrick floor and in the top doghouse.
- 3 Windsock and/or wind streamers:
 - A. Windsock at mudpit area should be high enough to be visible.
 - B. Windsock on the rig floor and / or top doghouse should be high enough to be visible.
- 4 Condition Flags and Signs
 - A. Warning sign on access road to location.
 - B. Flags to be displayed on sign at entrance to location. Green flag indicates normal safe condition. Yellow flag indicates potential pressure and danger. Red flag indicates danger (H₂S present in dangerous concentration). Only H₂S trained and certified personnel admitted to location.
- 5 Well control equipment:
 - A. See exhibit "E-1"
- 6 Communication:
 - A. While working under masks chalkboards will be used for communication.
 - B. Hand signals will be used where chalk board is inappropriate.
 - C. Two way radio will be used to communicate off location in case of emergency help is required. In most cases cellular telephones will be available at most drilling foreman's trailer or living quarters.
- 7 Drillstem Testing:

No DSTs r cores are planned at this time.
- 8 Drilling contractor supervisor will be required to be familiar with the effects H₂S has on tubular goods and other mechanical equipment.
- 9 If H₂S is encountered, mud system will be altered if necessary to maintain control of formation. A mud gas separator will be brought into service along with H₂S scavengers if necessary.

H₂S Contingency Plan
Davinci 7-18 Federal Com 9H
Cimarex Energy Co.
Lot # 7, Sec. 6, 25S, 27E
Eddy Co., NM

Emergency Procedures

In the event of a release of gas containing H₂S, the first responder(s) must:

- « Isolate the area and prevent entry by other persons into the 100 ppm ROE.
- « Evacuate any public places encompassed by the 100 ppm ROE.
- « Be equipped with H₂S monitors and air packs in order to control the release.
- « Use the "buddy system" to ensure no injuries occur during the 432-620-1975
- « Take precautions to avoid personal injury during this operation.
- « Contact operator and/or local officials to aid in operation. See list of phone numbers attached.
- « Have received training in the:
 - Detection of H₂S, and
 - Measures for protection against the gas,
 - Equipment used for protection and emergency response.

Ignition of Gas Source

Should control of the well be considered lost and ignition considered, take care to protect against exposure to Sulfur Dioxide (SO₂). Intentional ignition must be coordinated with the NMOCD and local officials. Additionally, the NM State Police may become involved. NM State Police shall be the Incident Command on scene of any major release. Take care to protect downwind whenever there is an ignition of the gas.

Characteristics of H₂S and SO₂

Please see attached International Chemical Safety Cards.

Contacting Authorities

Cimarex Energy Co. of Colorado's personnel must liaise with local and state agencies to ensure a proper response to a major release. Additionally, the OCD must be notified of the release as soon as possible but no later than 4 hours. Agencies will ask for information such as type and volume of release, wind direction, location of release, etc. Be prepared with all information available including directions to site. The following call list of essential and potential responders has been prepared for use during a release. Cimarex Energy Co. of Colorado's response must be in coordination with the State of New Mexico's "Hazardous Materials Emergency Response Plan" (HMER).

H₂S Contingency Plan Emergency Contacts
Davinci 7-18 Federal Com 9H
 Cimarex Energy Co.
 Lot # 7, Sec. 6, 25S, 27E
 Eddy Co., NM

Company Office

Cimarex Energy Co. of Colorado	800-969-4789
Co. Office and After-Hours Menu	

Key Personnel

Name	Title	Office	Mobile
Larry Seigrist	Drilling Manager	432-620-1934	580-243-8485
Charlie Pritchard	Drilling Superintendent	432-620-1975	432-238-7084
Roy Shirley	Construction Superintendent		432-634-2136

Artesia

Ambulance	911
State Police	575-746-2703
City Police	575-746-2703
Sheriff's Office	575-746-9888
Fire Department	575-746-2701
Local Emergency Planning Committee	575-746-2122
New Mexico Oil Conservation Division	575-748-1283

Carlsbad

Ambulance	911
State Police	575-885-3137
City Police	575-885-2111
Sheriff's Office	575-887-7551
Fire Department	575-887-3798
Local Emergency Planning Committee	575-887-6544
US Bureau of Land Management	575-887-6544

Santa Fe

New Mexico Emergency Response Commission (Santa Fe)	505-476-9600
New Mexico Emergency Response Commission (Santa Fe) 24 Hrs	505-827-9126
New Mexico State Emergency Operations Center	505-476-9635

National

National Emergency Response Center (Washington, D.C.)	800-424-8802
---	--------------

Medical

Flight for Life - 4000 24th St.; Lubbock, TX	806-743-9911
Aerocare - R3, Box 49F; Lubbock, TX	806-747-8923
Med Flight Air Amb - 2301 Yale Blvd S.E., #D3; Albuquerque, NM	505-842-4433
SB Air Med Service - 2505 Clark Carr Loop S.E.; Albuquerque, NM	505-842-4949

Other

Boots & Coots IWC	800-256-9688	or	281-931-8884
Cudd Pressure Control	432-699-0139	or	432-563-3356
Halliburton	575-746-2757		
B.J. Services	575-746-3569		

Cimarex DaVinci 7-18 Fed Com#9H Rev0 RM 19Oct17 Proposal Geodetic Report
(Non-Def Plan)



Report Date: October 19, 2017 - 01:53 PM
Client: Cimarex
Field: NM Eddy County (NAD 83)
Structure / Slot: Cimarex DaVinci 7-18 Fed Com #9H / New Slot
Well: Davinci 7-18 Federal Com 9H
Borehole: Davinci 7-18 Federal Com 9H
UWI / API#: Unknown / Unknown
Survey Name: Cimarex DaVinci 7-18 Fed Com#9H Rev0 RM 19Oct17
Survey Date: October 19, 2017
Tort / AHD / DDI / ERD Ratio: 105.330 * / 11339.698 ft / 6.394 / 1.163
Coordinate Reference System: NAD83 New Mexico State Plane, Eastern Zone, US Feet
Location Lat / Long: N 32° 9' 10.43513", W 104° 14' 4.54526"
Location Grid N/E Y/X: N 419373.860 rUS, E 571894.030 rUS
CRS Grid Convergence Angle: 0.0525 °
Grid Scale Factor: 0.99991016
Version / Patch: 2.10.565.0

Survey / DLS Computation: Minimum Curvature / Lubinski
Vertical Section Azimuth: 180.000 ° (Grid North)
Vertical Section Origin: 0,000 ft, 0,000 ft
TVD Reference Datum: RKB
TVD Reference Elevation: 3303.100 ft above MSL
Saabed / Ground Elevation: 3278.100 ft above MSL
Magnetic Declination: 7.442 °
Total Gravity Field Strength: 998.4382mgn (9.80665 Based)
Gravity Model: GARM
Total Magnetic Field Strength: 47985.863 nT
Magnetic Dip Angle: 59.870 °
Declination Date: October 19, 2017
Magnetic Declination Model: HDGM 2017
North Reference: Grid North
Grid Convergence Used: 0.0525 °
Total Corr Mag North->Grid North: 7.3899 °
Local Coord Referenced To: Well Head

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (*/100ft)	Northing (rUS)	Easting (rUS)	Latitude (N/S ° ' ")	Longitude (E/W ° ' ")
SHL [410' FSL, 1050' FWL]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	N/A	419373.86	571894.03	N 32 9 10.44	W 104 14 4.55
100.00	0.00	0.00	270.00	100.00	0.00	0.00	0.00	0.00	419373.86	571894.03	N 32 9 10.44	W 104 14 4.55
200.00	0.00	0.00	270.00	200.00	0.00	0.00	0.00	0.00	419373.86	571894.03	N 32 9 10.44	W 104 14 4.55
300.00	0.00	0.00	270.00	300.00	0.00	0.00	0.00	0.00	419373.86	571894.03	N 32 9 10.44	W 104 14 4.55
400.00	0.00	0.00	270.00	400.00	0.00	0.00	0.00	0.00	419373.86	571894.03	N 32 9 10.44	W 104 14 4.55
500.00	0.00	0.00	270.00	500.00	0.00	0.00	0.00	0.00	419373.86	571894.03	N 32 9 10.44	W 104 14 4.55
600.00	0.00	0.00	270.00	600.00	0.00	0.00	0.00	0.00	419373.86	571894.03	N 32 9 10.44	W 104 14 4.55
700.00	0.00	0.00	270.00	700.00	0.00	0.00	0.00	0.00	419373.86	571894.03	N 32 9 10.44	W 104 14 4.55
800.00	0.00	0.00	270.00	800.00	0.00	0.00	0.00	0.00	419373.86	571894.03	N 32 9 10.44	W 104 14 4.55
900.00	0.00	0.00	270.00	900.00	0.00	0.00	0.00	0.00	419373.86	571894.03	N 32 9 10.44	W 104 14 4.55
1000.00	0.00	0.00	270.00	1000.00	0.00	0.00	0.00	0.00	419373.86	571894.03	N 32 9 10.44	W 104 14 4.55
1100.00	0.00	0.00	270.00	1100.00	0.00	0.00	0.00	0.00	419373.86	571894.03	N 32 9 10.44	W 104 14 4.55
Salado	1178.00	0.00	270.00	1178.00	0.00	0.00	0.00	0.00	419373.86	571894.03	N 32 9 10.44	W 104 14 4.55
1200.00	0.00	0.00	270.00	1200.00	0.00	0.00	0.00	0.00	419373.86	571894.03	N 32 9 10.44	W 104 14 4.55
1300.00	0.00	0.00	270.00	1300.00	0.00	0.00	0.00	0.00	419373.86	571894.03	N 32 9 10.44	W 104 14 4.55
1400.00	0.00	0.00	270.00	1400.00	0.00	0.00	0.00	0.00	419373.86	571894.03	N 32 9 10.44	W 104 14 4.55
1500.00	0.00	0.00	270.00	1500.00	0.00	0.00	0.00	0.00	419373.86	571894.03	N 32 9 10.44	W 104 14 4.55
1600.00	0.00	0.00	270.00	1600.00	0.00	0.00	0.00	0.00	419373.86	571894.03	N 32 9 10.44	W 104 14 4.55
1700.00	0.00	0.00	270.00	1700.00	0.00	0.00	0.00	0.00	419373.86	571894.03	N 32 9 10.44	W 104 14 4.55
1800.00	0.00	0.00	270.00	1800.00	0.00	0.00	0.00	0.00	419373.86	571894.03	N 32 9 10.44	W 104 14 4.55
Castille	1837.00	0.00	270.00	1837.00	0.00	0.00	0.00	0.00	419373.86	571894.03	N 32 9 10.44	W 104 14 4.55
1900.00	0.00	0.00	270.00	1900.00	0.00	0.00	0.00	0.00	419373.86	571894.03	N 32 9 10.44	W 104 14 4.55
2000.00	0.00	0.00	270.00	2000.00	0.00	0.00	0.00	0.00	419373.86	571894.03	N 32 9 10.44	W 104 14 4.55
Bell Canyon	2043.00	0.00	270.00	2043.00	0.00	0.00	0.00	0.00	419373.86	571894.03	N 32 9 10.44	W 104 14 4.55
2100.00	0.00	0.00	270.00	2100.00	0.00	0.00	0.00	0.00	419373.86	571894.03	N 32 9 10.44	W 104 14 4.55
Nudge 2"/100' DLS	2200.00	0.00	270.00	2200.00	0.00	0.00	0.00	0.00	419373.86	571894.03	N 32 9 10.44	W 104 14 4.55
2300.00	2.00	7.78	270.00	2299.98	0.00	0.00	-1.75	2.00	419373.86	571892.29	N 32 9 10.44	W 104 14 4.57
2400.00	4.00	7.78	270.00	2399.84	0.00	0.00	-6.98	2.00	419373.86	571887.05	N 32 9 10.44	W 104 14 4.63
2500.00	6.00	7.78	270.00	2499.45	0.00	0.00	-15.69	2.00	419373.86	571878.34	N 32 9 10.44	W 104 14 4.73
Hold Nudge	2589.00	7.78	270.00	2587.81	0.00	0.00	-26.37	2.00	419373.86	571867.66	N 32 9 10.44	W 104 14 4.85
2600.00	7.78	7.78	270.00	2598.70	0.00	0.00	-27.86	0.00	419373.86	571866.17	N 32 9 10.44	W 104 14 4.87
2700.00	7.78	7.78	270.00	2697.78	0.00	0.00	-41.40	0.00	419373.86	571852.64	N 32 9 10.44	W 104 14 5.03
2800.00	7.78	7.78	270.00	2796.86	0.00	0.00	-54.93	0.00	419373.86	571839.10	N 32 9 10.44	W 104 14 5.18
2900.00	7.78	7.78	270.00	2895.94	0.00	0.00	-68.47	0.00	419373.86	571825.57	N 32 9 10.44	W 104 14 5.34
3000.00	7.78	7.78	270.00	2995.02	0.00	0.00	-82.01	0.00	419373.86	571812.03	N 32 9 10.44	W 104 14 5.50
Cherry Canyon	3027.23	7.78	270.00	3022.00	0.00	0.00	-85.69	0.00	419373.86	571808.35	N 32 9 10.44	W 104 14 5.54
3100.00	7.78	7.78	270.00	3094.10	0.00	0.00	-95.54	0.00	419373.86	571798.49	N 32 9 10.44	W 104 14 5.66
3200.00	7.78	7.78	270.00	3193.18	0.00	0.00	-109.08	0.00	419373.86	571784.96	N 32 9 10.44	W 104 14 5.81
3300.00	7.78	7.78	270.00	3292.26	0.00	0.00	-122.62	0.00	419373.86	571771.42	N 32 9 10.44	W 104 14 5.97
3400.00	7.78	7.78	270.00	3391.34	0.00	0.00	-136.15	0.00	419373.86	571757.89	N 32 9 10.44	W 104 14 6.13
3500.00	7.78	7.78	270.00	3490.42	0.00	0.00	-149.69	0.00	419373.86	571744.35	N 32 9 10.44	W 104 14 6.29
3600.00	7.78	7.78	270.00	3589.50	0.00	0.00	-163.23	0.00	419373.86	571730.82	N 32 9 10.44	W 104 14 6.44
3700.00	7.78	7.78	270.00	3688.58	0.00	0.00	-176.77	0.00	419373.86	571717.28	N 32 9 10.44	W 104 14 6.60
3800.00	7.78	7.78	270.00	3787.66	0.00	0.00	-190.30	0.00	419373.86	571703.74	N 32 9 10.44	W 104 14 6.76
3900.00	7.78	7.78	270.00	3886.74	0.00	0.00	-203.84	0.00	419373.86	571690.21	N 32 9 10.44	W 104 14 6.92
4000.00	7.78	7.78	270.00	3985.82	0.00	0.00	-217.38	0.00	419373.86	571676.67	N 32 9 10.44	W 104 14 7.07
Brushy Canyon	4064.78	7.78	270.00	4050.00	0.00	0.00	-226.15	0.00	419373.86	571667.91	N 32 9 10.44	W 104 14 7.18
4100.00	7.78	7.78	270.00	4064.90	0.00	0.00	-230.91	0.00	419373.86	571663.14	N 32 9 10.44	W 104 14 7.23
4200.00	7.78	7.78	270.00	4183.98	0.00	0.00	-244.45	0.00	419373.86	571649.60	N 32 9 10.44	W 104 14 7.39
4300.00	7.78	7.78	270.00	4283.06	0.00	0.00	-257.99	0.00	419373.86	571636.07	N 32 9 10.44	W 104 14 7.55
4400.00	7.78	7.78	270.00	4382.14	0.00	0.00	-271.52	0.00	419373.86	571622.53	N 32 9 10.44	W 104 14 7.70
4500.00	7.78	7.78	270.00	4481.22	0.00	0.00	-285.06	0.00	419373.86	571608.99	N 32 9 10.44	W 104 14 7.86
4600.00	7.78	7.78	270.00	4580.30	0.00	0.00	-298.60	0.00	419373.86	571595.46	N 32 9 10.44	W 104 14 8.02
4700.00	7.78	7.78	270.00	4679.37	0.00	0.00	-312.14	0.00	419373.86	571581.92	N 32 9 10.44	W 104 14 8.18
4800.00	7.78	7.78	270.00	4778.45	0.00	0.00	-325.67	0.00	419373.86	571568.39	N 32 9 10.44	W 104 14 8.33
4900.00	7.78	7.78	270.00	4877.53	0.00	0.00	-339.21	0.00	419373.86	571554.85	N 32 9 10.44	W 104 14 8.49
5000.00	7.78	7.78	270.00	4976.61	0.00	0.00	-352.75	0.00	419373.86	571541.32	N 32 9 10.44	W 104 14 8.65
5100.00	7.78	7.78	270.00	5075.69	0.00	0.00	-366.28	0.00	419373.86	571527.78	N 32 9 10.44	W 104 14 8.81
5200.00	7.78	7.78	270.00	5174.77	0.00	0.00	-379.82	0.00	419373.86	571514.24	N 32 9 10.44	W 104 14 8.96
Brushy Canyon Lower	5259.78	7.78	270.00	5234.00	0.00	0.00	-387.91	0.00	419373.86	571506.15	N 32 9 10.44	W 104 14 9.06
5300.00	7.78	7.78	270.00	5273.85	0.00	0.00	-393.36	0.00	419373.86	571500.71	N 32 9 10.44	W 104 14 9.12
5400.00	7.78	7.78	270.00	5372.93	0.00	0.00	-406.89	0.00	419373.86	571487.17	N 32 9 10.44	W 104 14 9.28
5500.00	7.78	7.78	270.00	5472.01	0.00	0.00	-420.43	0.00	419373.86	571473.64	N 32 9 10.44	W 104 14 9.44
Bone Spring	5573.67	7.78	270.00	5545.00	0.00	0.00	-430.40	0.00	419373.86	571463.67	N 32 9 10.44	W 104 14 9.55
5600.00	7.78	7.78	270.00	5571.09	0.00	0.00	-433.97	0.00	419373.86	571460.10	N 32 9 10.44	W 104 14 9.59
5700.00												

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S ° ' ")	Longitude (E/W ° ' ")
1st Bone Spring Ss	6526.44	7.78	270.00	6489.00	0.00	0.00	-559.38	0.00	419373.86	571334.70	N 32 9 10.44	W 104 14 11.05
	6600.00	7.78	270.00	6561.89	0.00	0.00	-569.34	0.00	419373.86	571324.74	N 32 9 10.44	W 104 14 11.17
	6700.00	7.78	270.00	6660.96	0.00	0.00	-582.87	0.00	419373.86	571311.21	N 32 9 10.44	W 104 14 11.33
	6800.00	7.78	270.00	6760.04	0.00	0.00	-596.41	0.00	419373.86	571297.67	N 32 9 10.44	W 104 14 11.48
	6900.00	7.78	270.00	6859.12	0.00	0.00	-609.95	0.00	419373.86	571284.14	N 32 9 10.44	W 104 14 11.64
2nd Bone Spring Ss	6990.71	7.78	270.00	6949.00	0.00	0.00	-622.23	0.00	419373.86	571271.86	N 32 9 10.44	W 104 14 11.78
	7000.00	7.78	270.00	6958.20	0.00	0.00	-623.49	0.00	419373.86	571270.60	N 32 9 10.44	W 104 14 11.80
Drop To Vertical 2°/100' DLS	7042.19	7.78	270.00	7000.00	0.00	0.00	-629.20	0.00	419373.86	571264.89	N 32 9 10.44	W 104 14 11.86
	7100.00	6.82	270.00	7057.36	0.00	0.00	-636.44	2.00	419373.86	571257.64	N 32 9 10.44	W 104 14 11.95
	7200.00	4.62	270.00	7156.87	0.00	0.00	-646.24	2.00	419373.86	571247.85	N 32 9 10.44	W 104 14 12.06
	7300.00	2.62	270.00	7256.67	0.00	0.00	-652.56	2.00	419373.86	571241.53	N 32 9 10.44	W 104 14 12.14
	7400.00	0.62	270.00	7356.62	0.00	0.00	-655.40	2.00	419373.86	571238.69	N 32 9 10.44	W 104 14 12.17
Hold	7431.19	0.00	270.00	7387.81	0.00	0.00	-655.57	2.00	419373.86	571238.52	N 32 9 10.44	W 104 14 12.17
	7500.00	0.00	270.00	7456.62	0.00	0.00	-655.57	0.00	419373.86	571238.52	N 32 9 10.44	W 104 14 12.17
	7600.00	0.00	270.00	7556.62	0.00	0.00	-655.57	0.00	419373.86	571238.52	N 32 9 10.44	W 104 14 12.17
	7700.00	0.00	270.00	7656.62	0.00	0.00	-655.57	0.00	419373.86	571238.52	N 32 9 10.44	W 104 14 12.17
	7800.00	0.00	270.00	7756.62	0.00	0.00	-655.57	0.00	419373.86	571238.52	N 32 9 10.44	W 104 14 12.17
	7900.00	0.00	270.00	7856.62	0.00	0.00	-655.57	0.00	419373.86	571238.52	N 32 9 10.44	W 104 14 12.17
	8000.00	0.00	270.00	7956.62	0.00	0.00	-655.57	0.00	419373.86	571238.52	N 32 9 10.44	W 104 14 12.17
	8100.00	0.00	270.00	8056.62	0.00	0.00	-655.57	0.00	419373.86	571238.52	N 32 9 10.44	W 104 14 12.17
	8200.00	0.00	270.00	8156.62	0.00	0.00	-655.57	0.00	419373.86	571238.52	N 32 9 10.44	W 104 14 12.17
	8300.00	0.00	270.00	8256.62	0.00	0.00	-655.57	0.00	419373.86	571238.52	N 32 9 10.44	W 104 14 12.17
3rd Bone Spring Ss	8340.38	0.00	270.00	8297.00	0.00	0.00	-655.57	0.00	419373.86	571238.52	N 32 9 10.44	W 104 14 12.17
	8400.00	0.00	270.00	8356.62	0.00	0.00	-655.57	0.00	419373.86	571238.52	N 32 9 10.44	W 104 14 12.17
	8500.00	0.00	270.00	8456.62	0.00	0.00	-655.57	0.00	419373.86	571238.52	N 32 9 10.44	W 104 14 12.17
	8600.00	0.00	270.00	8556.62	0.00	0.00	-655.57	0.00	419373.86	571238.52	N 32 9 10.44	W 104 14 12.17
Wolfcamp A	8666.38	0.00	270.00	8623.00	0.00	0.00	-655.57	0.00	419373.86	571238.52	N 32 9 10.44	W 104 14 12.17
	8700.00	0.00	270.00	8656.62	0.00	0.00	-655.57	0.00	419373.86	571238.52	N 32 9 10.44	W 104 14 12.17
	8800.00	0.00	270.00	8756.62	0.00	0.00	-655.57	0.00	419373.86	571238.52	N 32 9 10.44	W 104 14 12.17
	8900.00	0.00	270.00	8856.62	0.00	0.00	-655.57	0.00	419373.86	571238.52	N 32 9 10.44	W 104 14 12.17
	9000.00	0.00	270.00	8956.62	0.00	0.00	-655.57	0.00	419373.86	571238.52	N 32 9 10.44	W 104 14 12.17
	9100.00	0.00	270.00	9056.62	0.00	0.00	-655.57	0.00	419373.86	571238.52	N 32 9 10.44	W 104 14 12.17
	9200.00	0.00	270.00	9156.62	0.00	0.00	-655.57	0.00	419373.86	571238.52	N 32 9 10.44	W 104 14 12.17
KOP - Build 12°/100' DLS	9245.39	0.00	270.00	9202.01	0.00	0.00	-655.57	0.00	419373.86	571238.52	N 32 9 10.44	W 104 14 12.17
Wolfcamp B	9267.39	2.64	180.00	9224.00	0.51	-0.51	-655.57	12.00	419373.35	571238.52	N 32 9 10.44	W 104 14 12.17
	9300.00	6.55	180.00	9256.50	3.12	-3.12	-655.57	12.00	419370.74	571238.52	N 32 9 10.41	W 104 14 12.17
	9400.00	18.55	180.00	9353.93	24.81	-24.81	-655.57	12.00	419349.05	571238.52	N 32 9 10.20	W 104 14 12.17
Wolfcamp C	9417.05	20.60	180.00	9370.00	30.53	-30.53	-655.57	12.00	419343.33	571238.52	N 32 9 10.14	W 104 14 12.17
	9500.00	30.55	180.00	9444.72	66.29	-66.29	-655.57	12.00	419307.57	571238.52	N 32 9 9.79	W 104 14 12.17
Wolfcamp D	9535.99	34.87	180.00	9475.00	85.74	-85.74	-655.57	12.00	419288.13	571238.52	N 32 9 9.59	W 104 14 12.17
	9600.00	42.55	180.00	9524.91	125.74	-125.74	-655.57	12.00	419248.13	571238.52	N 32 9 9.20	W 104 14 12.17
	9700.00	54.55	180.00	9590.98	200.56	-200.56	-655.57	12.00	419173.32	571238.52	N 32 9 8.46	W 104 14 12.17
	9800.00	66.55	180.00	9640.05	287.48	-287.48	-655.57	12.00	419086.40	571238.52	N 32 9 7.60	W 104 14 12.17
Build & Turn 4°/100' DLS	9870.39	75.00	180.00	9663.21	353.89	-353.89	-655.57	12.00	419020.00	571238.52	N 32 9 6.94	W 104 14 12.17
Wolfcamp D4	9900.00	76.18	180.00	9670.57	382.57	-382.57	-655.57	4.00	418991.33	571238.52	N 32 9 6.66	W 104 14 12.17
	9901.79	76.26	180.00	9671.00	384.31	-384.31	-655.57	4.00	418989.59	571238.52	N 32 9 6.64	W 104 14 12.17
	10000.00	80.18	180.00	9691.05	480.43	-480.43	-655.57	4.00	418893.46	571238.52	N 32 9 5.69	W 104 14 12.18
	10100.00	84.18	180.00	9704.64	579.48	-579.48	-655.57	4.00	418794.43	571238.52	N 32 9 4.71	W 104 14 12.18
	10200.00	88.18	180.00	9711.29	679.24	-679.24	-655.58	4.00	418694.69	571238.51	N 32 9 3.72	W 104 14 12.18
Landing Point	10236.64	89.77	180.00	9712.00	718.87	-718.87	-655.58	4.00	418655.06	571238.51	N 32 9 3.33	W 104 14 12.18
	10300.00	89.77	180.00	9712.24	779.23	-779.23	-655.59	0.00	418594.70	571238.50	N 32 9 2.73	W 104 14 12.18
	10400.00	89.77	180.00	9712.65	879.23	-879.23	-655.60	0.00	418494.71	571238.49	N 32 9 1.74	W 104 14 12.18
	10500.00	89.77	180.00	9713.05	979.23	-979.23	-655.60	0.00	418394.72	571238.48	N 32 9 0.75	W 104 14 12.18
	10600.00	89.77	180.00	9713.45	1079.23	-1079.23	-655.61	0.00	418294.73	571238.48	N 32 8 59.76	W 104 14 12.18
	10700.00	89.77	180.00	9713.85	1179.23	-1179.23	-655.62	0.00	418194.74	571238.47	N 32 8 58.77	W 104 14 12.18
	10800.00	89.77	180.00	9714.25	1279.22	-1279.22	-655.63	0.00	418094.75	571238.46	N 32 8 57.78	W 104 14 12.18
	10900.00	89.77	180.00	9714.65	1379.22	-1379.22	-655.64	0.00	417994.76	571238.45	N 32 8 56.79	W 104 14 12.19
	11000.00	89.77	180.00	9715.05	1479.22	-1479.22	-655.65	0.00	417894.77	571238.44	N 32 8 55.80	W 104 14 12.19
	11100.00	89.77	180.00	9715.45	1579.22	-1579.22	-655.66	0.00	417794.78	571238.43	N 32 8 54.81	W 104 14 12.19
	11200.00	89.77	180.00	9715.86	1679.22	-1679.22	-655.66	0.00	417694.79	571238.43	N 32 8 53.82	W 104 14 12.19
	11300.00	89.77	180.00	9716.26	1779.22	-1779.22	-655.67	0.00	417594.80	571238.42	N 32 8 52.84	W 104 14 12.19
	11400.00	89.77	180.00	9716.66	1879.22	-1879.22	-655.68	0.00	417494.81	571238.41	N 32 8 51.85	W 104 14 12.19
	11500.00	89.77	180.00	9717.06	1979.22	-1979.22	-655.69	0.00	417394.82	571238.40	N 32 8 50.86	W 104 14 12.19
	11600.00	89.77	180.00	9717.46	2079.22	-2079.22	-655.70	0.00	417294.83	571238.39	N 32 8 49.87	W 104 14 12.19
	11700.00	89.77	180.00	9717.86	2179.22	-2179.22	-655.71	0.00	417194.84	571238.38	N 32 8 48.88	W 104 14 12.19
	11800.00	89.77	180.00	9718.26	2279.22	-2279.22	-655.71	0.00	417094.85	571238.38	N 32 8 47.89	W 104 14 12.20
	11900.00	89.77	180.00	9718.67	2379.22	-2379.22	-655.72	0.00	416994.86	571238.37	N 32 8 46.90	W 104 14 12.20
	12000.00	89.77	180.00	9719.07	2479.22	-2479.22	-655.73	0.00	416894.87	571238.36	N 32 8 45.91	W 104 14 12.20
	12100.00	89.77	180.00	9719.47	2579.21	-2579.21	-655.74	0.00	416794.88	571238.35	N 32 8 44.92	W 104 14 12.20
	12200.00	89.77	180.00	9719.87	2679.21	-2679.21	-655.75	0.00	416694.89	571238.34	N 32 8 43.93	W 104 14 12.20
	12300.00	89.77	180.00	9720.27	277							

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS ("/100ft)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S ° ' ")	Longitude (E/W ° ' ")
	15500.00	89.77	180.00	9733.12	5979.19	-5979.19	-656.03	0.00	413395.22	571238.06	N 32 8 11.28	W 104 14 12.24
	15600.00	89.77	180.00	9733.52	6079.19	-6079.19	-656.04	0.00	413295.23	571238.05	N 32 8 10.29	W 104 14 12.24
	15700.00	89.77	180.00	9733.92	6179.19	-6179.19	-656.05	0.00	413195.24	571238.04	N 32 8 9.30	W 104 14 12.24
	15800.00	89.77	180.00	9734.32	6279.18	-6279.18	-656.06	0.00	413095.25	571238.03	N 32 8 8.31	W 104 14 12.24
	15900.00	89.77	180.00	9734.72	6379.18	-6379.18	-656.06	0.00	412995.26	571238.03	N 32 8 7.32	W 104 14 12.24
	16000.00	89.77	180.00	9735.12	6479.18	-6479.18	-656.07	0.00	412895.27	571238.02	N 32 8 6.33	W 104 14 12.24
	16100.00	89.77	180.00	9735.52	6579.18	-6579.18	-656.08	0.00	412795.28	571238.01	N 32 8 5.34	W 104 14 12.25
	16200.00	89.77	180.00	9735.93	6679.18	-6679.18	-656.09	0.00	412695.29	571238.00	N 32 8 4.35	W 104 14 12.25
	16300.00	89.77	180.00	9736.33	6779.18	-6779.18	-656.10	0.00	412595.30	571237.99	N 32 8 3.36	W 104 14 12.25
	16400.00	89.77	180.00	9736.73	6879.18	-6879.18	-656.11	0.00	412495.31	571237.98	N 32 8 2.37	W 104 14 12.25
	16500.00	89.77	180.00	9737.13	6979.18	-6979.18	-656.11	0.00	412395.32	571237.98	N 32 8 1.38	W 104 14 12.25
	16600.00	89.77	180.00	9737.53	7079.18	-7079.18	-656.12	0.00	412295.33	571237.97	N 32 8 0.39	W 104 14 12.25
	16700.00	89.77	180.00	9737.93	7179.18	-7179.18	-656.13	0.00	412195.34	571237.96	N 32 7 59.40	W 104 14 12.25
	16800.00	89.77	180.00	9738.33	7279.18	-7279.18	-656.14	0.00	412095.35	571237.95	N 32 7 58.41	W 104 14 12.25
	16900.00	89.77	180.00	9738.73	7379.18	-7379.18	-656.15	0.00	411995.36	571237.94	N 32 7 57.42	W 104 14 12.25
	17000.00	89.77	180.00	9739.14	7479.17	-7479.17	-656.16	0.00	411895.37	571237.93	N 32 7 56.43	W 104 14 12.26
	17100.00	89.77	180.00	9739.54	7579.17	-7579.17	-656.17	0.00	411795.38	571237.92	N 32 7 55.44	W 104 14 12.26
	17200.00	89.77	180.00	9739.94	7679.17	-7679.17	-656.17	0.00	411695.39	571237.92	N 32 7 54.45	W 104 14 12.26
	17300.00	89.77	180.00	9740.34	7779.17	-7779.17	-656.18	0.00	411595.40	571237.91	N 32 7 53.46	W 104 14 12.26
	17400.00	89.77	180.00	9740.74	7879.17	-7879.17	-656.19	0.00	411495.41	571237.90	N 32 7 52.47	W 104 14 12.26
	17500.00	89.77	180.00	9741.14	7979.17	-7979.17	-656.20	0.00	411395.42	571237.89	N 32 7 51.48	W 104 14 12.26
	17600.00	89.77	180.00	9741.54	8079.17	-8079.17	-656.21	0.00	411295.43	571237.88	N 32 7 50.50	W 104 14 12.26
	17700.00	89.77	180.00	9741.95	8179.17	-8179.17	-656.22	0.00	411195.44	571237.87	N 32 7 49.51	W 104 14 12.26
	17800.00	89.77	180.00	9742.35	8279.17	-8279.17	-656.23	0.00	411095.45	571237.86	N 32 7 48.52	W 104 14 12.26
	17900.00	89.77	180.00	9742.75	8379.17	-8379.17	-656.23	0.00	410995.46	571237.86	N 32 7 47.53	W 104 14 12.27
	18000.00	89.77	180.00	9743.15	8479.17	-8479.17	-656.24	0.00	410895.47	571237.85	N 32 7 46.54	W 104 14 12.27
	18100.00	89.77	180.00	9743.55	8579.17	-8579.17	-656.25	0.00	410795.48	571237.84	N 32 7 45.55	W 104 14 12.27
	18200.00	89.77	180.00	9743.95	8679.17	-8679.17	-656.26	0.00	410695.49	571237.83	N 32 7 44.56	W 104 14 12.27
	18300.00	89.77	180.00	9744.35	8779.16	-8779.16	-656.27	0.00	410595.50	571237.82	N 32 7 43.57	W 104 14 12.27
	18400.00	89.77	180.00	9744.76	8879.16	-8879.16	-656.28	0.00	410495.51	571237.81	N 32 7 42.58	W 104 14 12.27
	18500.00	89.77	180.00	9745.16	8979.16	-8979.16	-656.29	0.00	410395.52	571237.81	N 32 7 41.59	W 104 14 12.27
	18600.00	89.77	180.00	9745.56	9079.16	-9079.16	-656.29	0.00	410295.53	571237.80	N 32 7 40.60	W 104 14 12.27
	18700.00	89.77	180.00	9745.96	9179.16	-9179.16	-656.30	0.00	410195.54	571237.79	N 32 7 39.61	W 104 14 12.27
	18800.00	89.77	180.00	9746.36	9279.16	-9279.16	-656.31	0.00	410095.55	571237.78	N 32 7 38.62	W 104 14 12.28
	18900.00	89.77	180.00	9746.76	9379.16	-9379.16	-656.32	0.00	409995.56	571237.77	N 32 7 37.63	W 104 14 12.28
	19000.00	89.77	180.00	9747.16	9479.16	-9479.16	-656.33	0.00	409895.57	571237.76	N 32 7 36.64	W 104 14 12.28
	19100.00	89.77	180.00	9747.56	9579.16	-9579.16	-656.34	0.00	409795.58	571237.75	N 32 7 35.65	W 104 14 12.28
	19200.00	89.77	180.00	9747.97	9679.16	-9679.16	-656.34	0.00	409695.59	571237.75	N 32 7 34.66	W 104 14 12.28
	19300.00	89.77	180.00	9748.37	9779.16	-9779.16	-656.35	0.00	409595.60	571237.74	N 32 7 33.67	W 104 14 12.28
	19400.00	89.77	180.00	9748.77	9879.16	-9879.16	-656.36	0.00	409495.61	571237.73	N 32 7 32.68	W 104 14 12.28
	19500.00	89.77	180.00	9749.17	9979.15	-9979.15	-656.37	0.00	409395.62	571237.72	N 32 7 31.69	W 104 14 12.28
	19600.00	89.77	180.00	9749.57	10079.15	-10079.15	-656.38	0.00	409295.63	571237.71	N 32 7 30.71	W 104 14 12.29
	19700.00	89.77	180.00	9749.97	10179.15	-10179.15	-656.39	0.00	409195.64	571237.70	N 32 7 29.72	W 104 14 12.29
	19800.00	89.77	180.00	9750.37	10279.15	-10279.15	-656.40	0.00	409095.65	571237.69	N 32 7 28.73	W 104 14 12.29
	19900.00	89.77	180.00	9750.78	10379.15	-10379.15	-656.40	0.00	408995.66	571237.69	N 32 7 27.74	W 104 14 12.29
	20000.00	89.77	180.00	9751.18	10479.15	-10479.15	-656.41	0.00	408895.67	571237.68	N 32 7 26.75	W 104 14 12.29
	20100.00	89.77	180.00	9751.58	10579.15	-10579.15	-656.42	0.00	408795.68	571237.67	N 32 7 25.76	W 104 14 12.29
	20200.00	89.77	180.00	9751.98	10679.15	-10679.15	-656.43	0.00	408695.69	571237.66	N 32 7 24.77	W 104 14 12.29

Cimarex DaVinci
7-18 Fed Com
#9H - PBHL
[330' FSL, 380'
FWL]

20204.98 89.77 180.00 9752.00 10684.13 -10684.13 -656.43 0.00 408690.71 571237.66 N 32 7 24.72 W 104 14 12.29


Survey Type: Non-Def Plan

Survey Error Model: ISCWSA Rev 0 *** 3-D 95.000% Confidence 2.7955 sigma
Survey Program:

Description	Part	MD From (ft)	MD To (ft)	EOU Freq (ft)	Hole Size (in)	Casing Diameter (in)	Expected Max Inclination (deg)	Survey Tool Type	Borehole / Survey
	1	0.000	24.000	1/100.000	30.000	30.000		NAL_MWD_PLUS_0.5_DEG- Depth Only	Davinci 7-18 Federal Com 9H / Cimarex DaVinci 7-18 Fed Com#9H Rev0 RM 19Oct17
	1	24.000	20204.982	1/100.000	30.000	30.000		NAL_MWD_PLUS_0.5_DEG	Davinci 7-18 Federal Com 9H / Cimarex DaVinci 7-18 Fed

Borehole: Davinci 7-18 Federal Com 9H	Well: Davinci 7-18 Federal Com 9H	Field: NM Eddy County (NAD 83)	Structure: Cimarex DaVinci 7-18 Fed Com #9H
---	---	--	---

Gravity & Magnetic Parameters		Surface Location NAD83 New Mexico State Plane, Eastern Zone, US Feet			Miscellaneous	
Model: HDGM 2017 + Dip: 69.67°	Date: 19-Oct-2017	Lat: N 32 9 10.44	Northing: 419373.866US	Grid Conv: 0.0525°	Slot: New Slot	TVD Ref: RKB(3303.1ft above MSL)
MagDec: 7.442°	FS: 47985.863mT	Gravity FS: 998.438mgn (9.80665 Based)	Lon: W 104 14 4.65	Easting: 571894.038US	Scale Fact: 0.99991016	Plan: Cimarex DaVinci 7-18 Fed Com#9H Rev0 RM 19Oct17

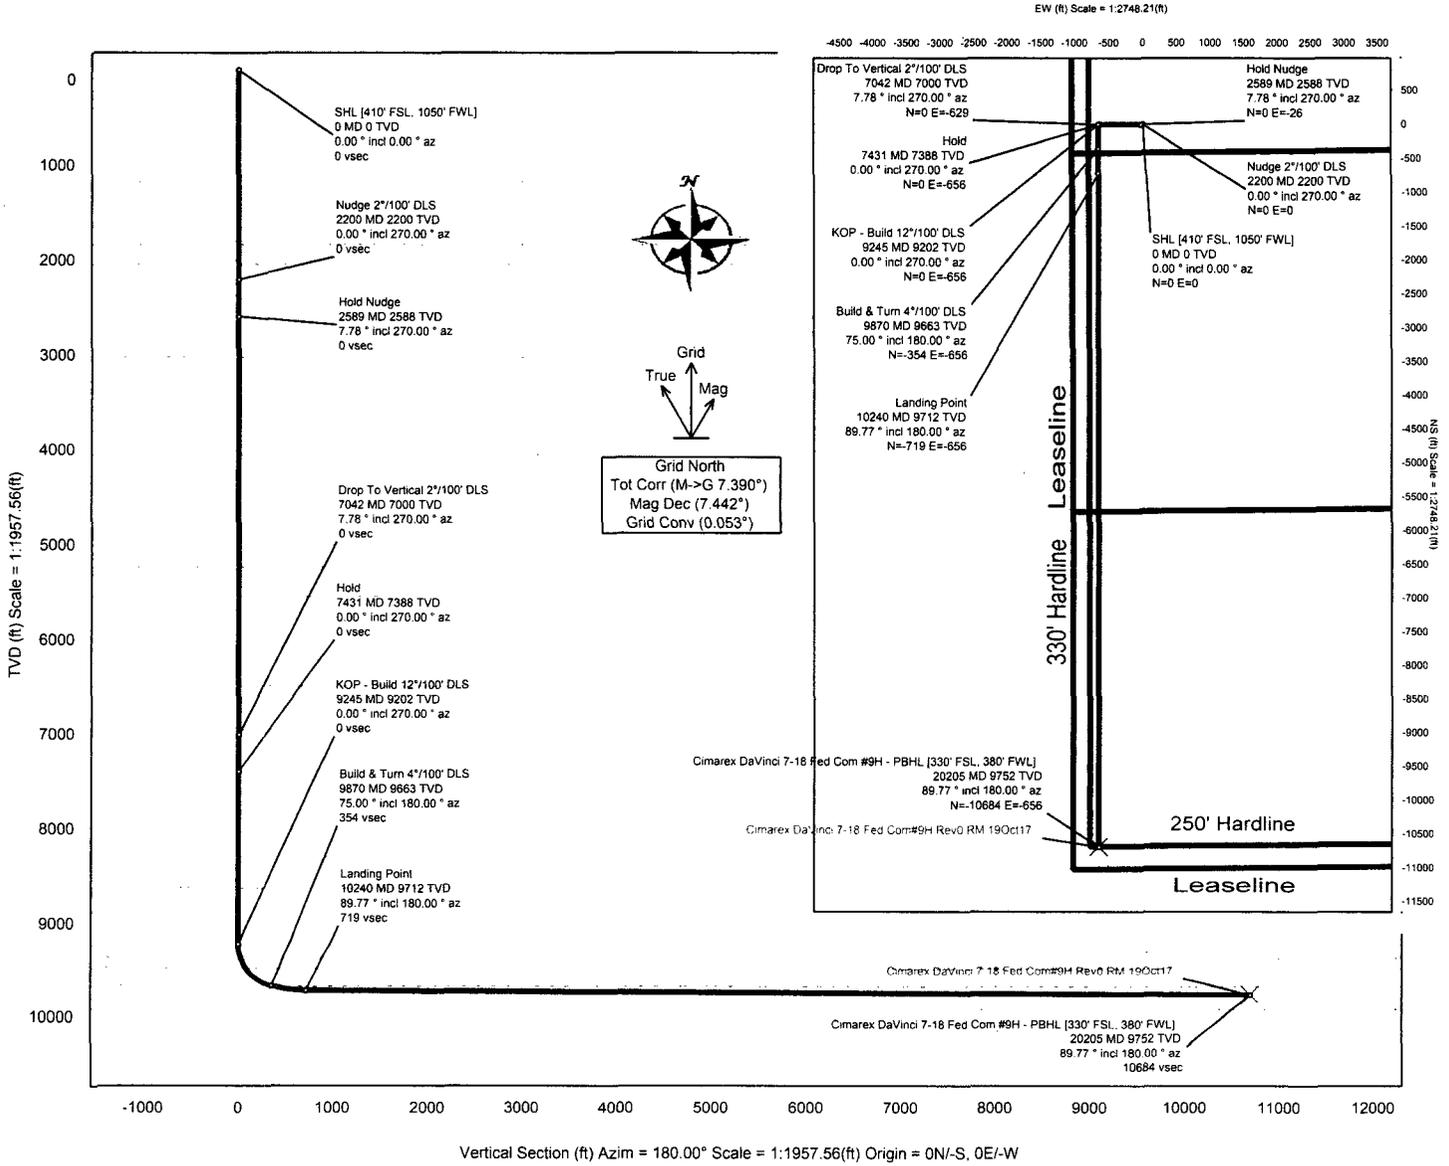

Critical Point	MD	INCL	AZIM	TVD	VSEC	N(+)/S(-)	E(+)/W(-)	DLS
SHL (410' FSL, 1050' FWL)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Salado	1178.00	0.00	270.00	1178.00	0.00	0.00	0.00	0.00
Castille	1837.00	0.00	270.00	1837.00	0.00	0.00	0.00	0.00
Bell Canyon	2043.00	0.00	270.00	2043.00	0.00	0.00	0.00	0.00
Nudge 2°/100' DLS	2200.00	0.00	270.00	2200.00	0.00	0.00	0.00	0.00
Hold Nudge	2589.00	7.78	270.00	2587.81	0.00	0.00	-26.37	2.00
Cherry Canyon	3027.23	7.78	270.00	3022.00	0.00	0.00	-85.69	0.00
Brushy Canyon	4064.78	7.78	270.00	4050.00	0.00	0.00	-226.15	0.00
Brushy Canyon Lower	5259.78	7.78	270.00	5234.00	0.00	0.00	-387.91	0.00
Bone Spring	5573.67	7.78	270.00	5545.00	0.00	0.00	-430.40	0.00
1st Bone Spring Ss	6526.44	7.78	270.00	6489.00	0.00	0.00	-559.38	0.00
2nd Bone Spring Ss	6990.71	7.78	270.00	6949.00	0.00	0.00	-622.23	0.00
Drop To Vertical 2°/100' DLS	7042.19	7.78	270.00	7000.00	0.00	0.00	-629.20	0.00
Hold	7431.19	0.00	270.00	7387.81	0.00	0.00	-655.57	2.00
3rd Bone Spring Ss	8340.38	0.00	270.00	8297.00	0.00	0.00	-655.57	0.00
Wolfcamp A	8666.38	0.00	270.00	8623.00	0.00	0.00	-655.57	0.00
KOP - Build 12°/100' DLS	9245.39	0.00	270.00	9202.01	0.00	0.00	-655.57	0.00
Wolfcamp B	9267.39	2.64	180.00	9224.00	0.51	-0.51	-655.57	12.00
Wolfcamp C	9417.05	20.60	180.00	9370.00	30.53	-30.53	-655.57	12.00
Wolfcamp D	9535.99	34.87	180.00	9475.00	85.74	-85.74	-655.57	12.00
Build & Turn 4°/100' DLS	9870.39	75.00	180.00	9663.21	353.89	-353.89	-655.57	12.00
Wolfcamp D4	9901.79	76.26	180.00	9671.00	384.31	-384.31	-655.57	4.00
Landing Point	10239.64	89.77	180.00	9712.00	718.87	-718.87	-655.58	4.00
Cimarex DaVinci 7-18 Fed Com #9H - PBHL (330' FSL, 380' FWL)	20204.98	89.77	180.00	9752.00	10684.13	-10684.13	-656.43	0.00
Wolfcamp E	NaN	NaN	NaN	9915.00				

1. Geological Formations

TVD of target 9,752
MD at TD 20,205

Pilot Hole TD N/A
Deepest expected fresh water

Formation	Depth (TVD) from KB	Water/Mineral Bearing/Target Zone	Hazards
Rustler	0	N/A	
Salado	1178	N/A	
Castille	1837	N/A	
Bell Canyon	2043	Hydrocarbons	
Cherry Canyon	3022	Hydrocarbons	
Brushy Canyon	4050	Hydrocarbons	
Brushy Canyon Lower	5234	Hydrocarbons	
Bone Spring	5545	Hydrocarbons	
1st Bone Spring SS	6489	Hydrocarbons	
2nd Bone Spring SS	6949	Hydrocarbons	
3rd Bone Spring SS	8297	Hydrocarbons	
Wolfcamp A	8623	Hydrocarbons	
Wolfcamp B	9224	Hydrocarbons	
Wolfcamp C	9370	Hydrocarbons	
Wolfcamp D	9475	Hydrocarbons	
Wolfcamp D4	9475	Hydrocarbons	
Wolfcamp E	9915	N/A	

2. Casing Program

Hole Size	Casing Depth From	Casing Depth To	Casing Size	Weight (lb/ft)	Grade	Conn.	SF Collapse	SF Burst	SF Tension
17 1/2	0	450	13-3/8"	48.00	H-40/J-55 Hybrid	ST&C	3.59	8.40	14.91
12 1/4	0	2023	9-5/8"	36.00	J-55	LT&C	1.88	3.28	6.22
8 3/4	0	9245	7"	26.00	L-80	LT&C	1.25	1.68	2.02
8 3/4	9245	10240	7"	26.00	L-80	BT&C	1.19	1.59	45.82
6	9245	20205	4-1/2"	11.60	HCP-110	BT&C	1.24	1.51	62.40
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet

TVD was used on all calculations.

All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

Cimarex Energy Co., Davinci 7-18 Federal Com 9H

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Does casing meet API specifications? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the intermediate pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef?	N
Is well within the designated 4 string boundary.	N
Is well located in SOPA but not in R-111-P?	N
If yes, are the first 2 strings cemented to surface and 3rd string cement tied back 500' into previous casing?	N
Is well located in R-111-P and SOPA?	N
If yes, are the first three strings cemented to surface?	N
Is 2nd string set 100' to 600' below the base of salt?	N
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	N
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	N
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	N

3. Cementing Program

Casing	# Sks	Wt. lb/gal	Yld ft ³ /sack	H ₂ O gal/sk	500# Comp. Strength (hours)	Slurry Description
Surface	91	13.50	1.72	9.15	15.5	Lead: Class C + Bentonite
	195	14.80	1.34	6.32	9.5	Tail: Class C + LCM
Intermediate	383	12.90	1.88	9.65	12	Lead: 35:65 (Poz:C) + Salt + Bentonite
	118	14.80	1.34	6.32	9.5	Tail: Class C + LCM
Production	383	10.30	3.64	22.18		Lead: Tuned Light + LCM
	127	14.20	1.30	5.86	14:30	Tail: 50:50 (Poz:H) + Salt + Bentonite + Fluid Loss + Dispersant + SMS
Completion System	724	14.20	1.30	5.86	14:30	Tail: 50:50 (Poz:H) + Salt + Bentonite + Fluid Loss + Dispersant + SMS

Casing String	TOC	% Excess
Surface	0	33
Intermediate	0	44
Production	1823	23
Completion System	10240	10

4. Pressure Control Equipment

A variance is requested for the use of a diverter on the surface casing. See attached for schematic.					
BOP Installed and tested before drilling which hole?	Size	Min Required WP	Type		Tested To
12 1/4	13 5/8	2M	Annular	X	50% of working pressure
			Blind Ram		2M
			Pipe Ram		
			Double Ram	X	
			Other		
8 3/4	13 5/8	3M	Annular	X	50% of working pressure
			Blind Ram		3M
			Pipe Ram		
			Double Ram	X	
			Other		
6	13 5/8	5M	Annular	X	50% of working pressure
			Blind Ram		5M
			Pipe Ram	X	
			Double Ram	X	
			Other		

BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested.

Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold. See attached schematics.

X	Formation integrity test will be performed per Onshore Order #2. On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.i.
X	A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. See attached for specs and hydrostatic test chart.
N	Are anchors required by manufacturer?

5. Mud Program

Depth	Type	Weight (ppg)	Viscosity	Water Loss
0' to 450'	FW Spud Mud	8.30 - 8.80	30-32	N/C
450' to 2023'	Brine Water	9.70 - 10.20	30-32	N/C
2023' to 10240'	FW/Cut Brine	8.50 - 9.00	30-32	N/C
10240' to 20205'	Oil Based Mud	13.50 - 14.00	50-70	N/C

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

What will be used to monitor the loss or gain of fluid?	PVT/Pason/Visual Monitoring
---	-----------------------------

6. Logging and Testing Procedures

Logging, Coring and Testing	
X	Will run GR/CNL from TD to surface (horizontal well – vertical portion of hole). Stated logs run will be in the Completion Report and submitted to the BLM.
	No logs are planned based on well control or offset log information.
	Drill stem test?
	Coring?

Additional Logs Planned	Interval

7. Drilling Conditions

Condition	
BH Pressure at deepest TVD	7099 psi
Abnormal Temperature	No

Hydrogen Sulfide (H2S) monitors will be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of Onshore Oil and Gas Order #6. If Hydrogen Sulfide is encountered, measured values and formations will be provided to the BLM.	
X	H2S is present
X	H2S plan is attached

8. Other Facets of Operation

9. Wellhead

A multi-bowl wellhead system will be utilized.

After running the 13-3/8" surface casing, a 13 5/8" BOP/BOPE system with a minimum working pressure of 5000 psi will be installed on the wellhead system and will be pressure tested to 250 psi low followed by a 5000 psi test. Annular will be tested to 50% of working pressure. The pressure test will be repeated at least every 30 days, as per Onshore Order No. 2.

The multi-bowl wellhead will be installed by vendor's representative. A copy of the installation instructions has been sent to the BLM field office.

The wellhead will be installed by a third-party welder while being monitored by the wellhead vendor representative.

All BOP equipment will be tested utilizing a conventional test plug. Not a cup or J-packer type.

A solid steel body pack-off will be utilized after running and cementing the intermediate casing. After installation the pack-off and lower flange will be pressure tested to 5000 psi.

A solid steel body pack-off will be utilized after running and cementing the production casing. After installation the pack-off and lower flange will be pressure tested to 5000 psi.

The surface casing string will be tested as per Onshore Order No. 2 to at least 0.22 psi/ft or 1500 psi, whichever is greater.

The casing string utilizing steel body pack-off will be tested to 70% of casing burst.

If well conditions dictate conventional slips will be set and BOPE will be tested to appropriate pressures based on permitted pressure requirements.

Exhibit F – Co-Flex Hose
Davinci 7-18 Federal Com 9H
Cimarex Energy Co.
06-25S-27E
Eddy County, NM


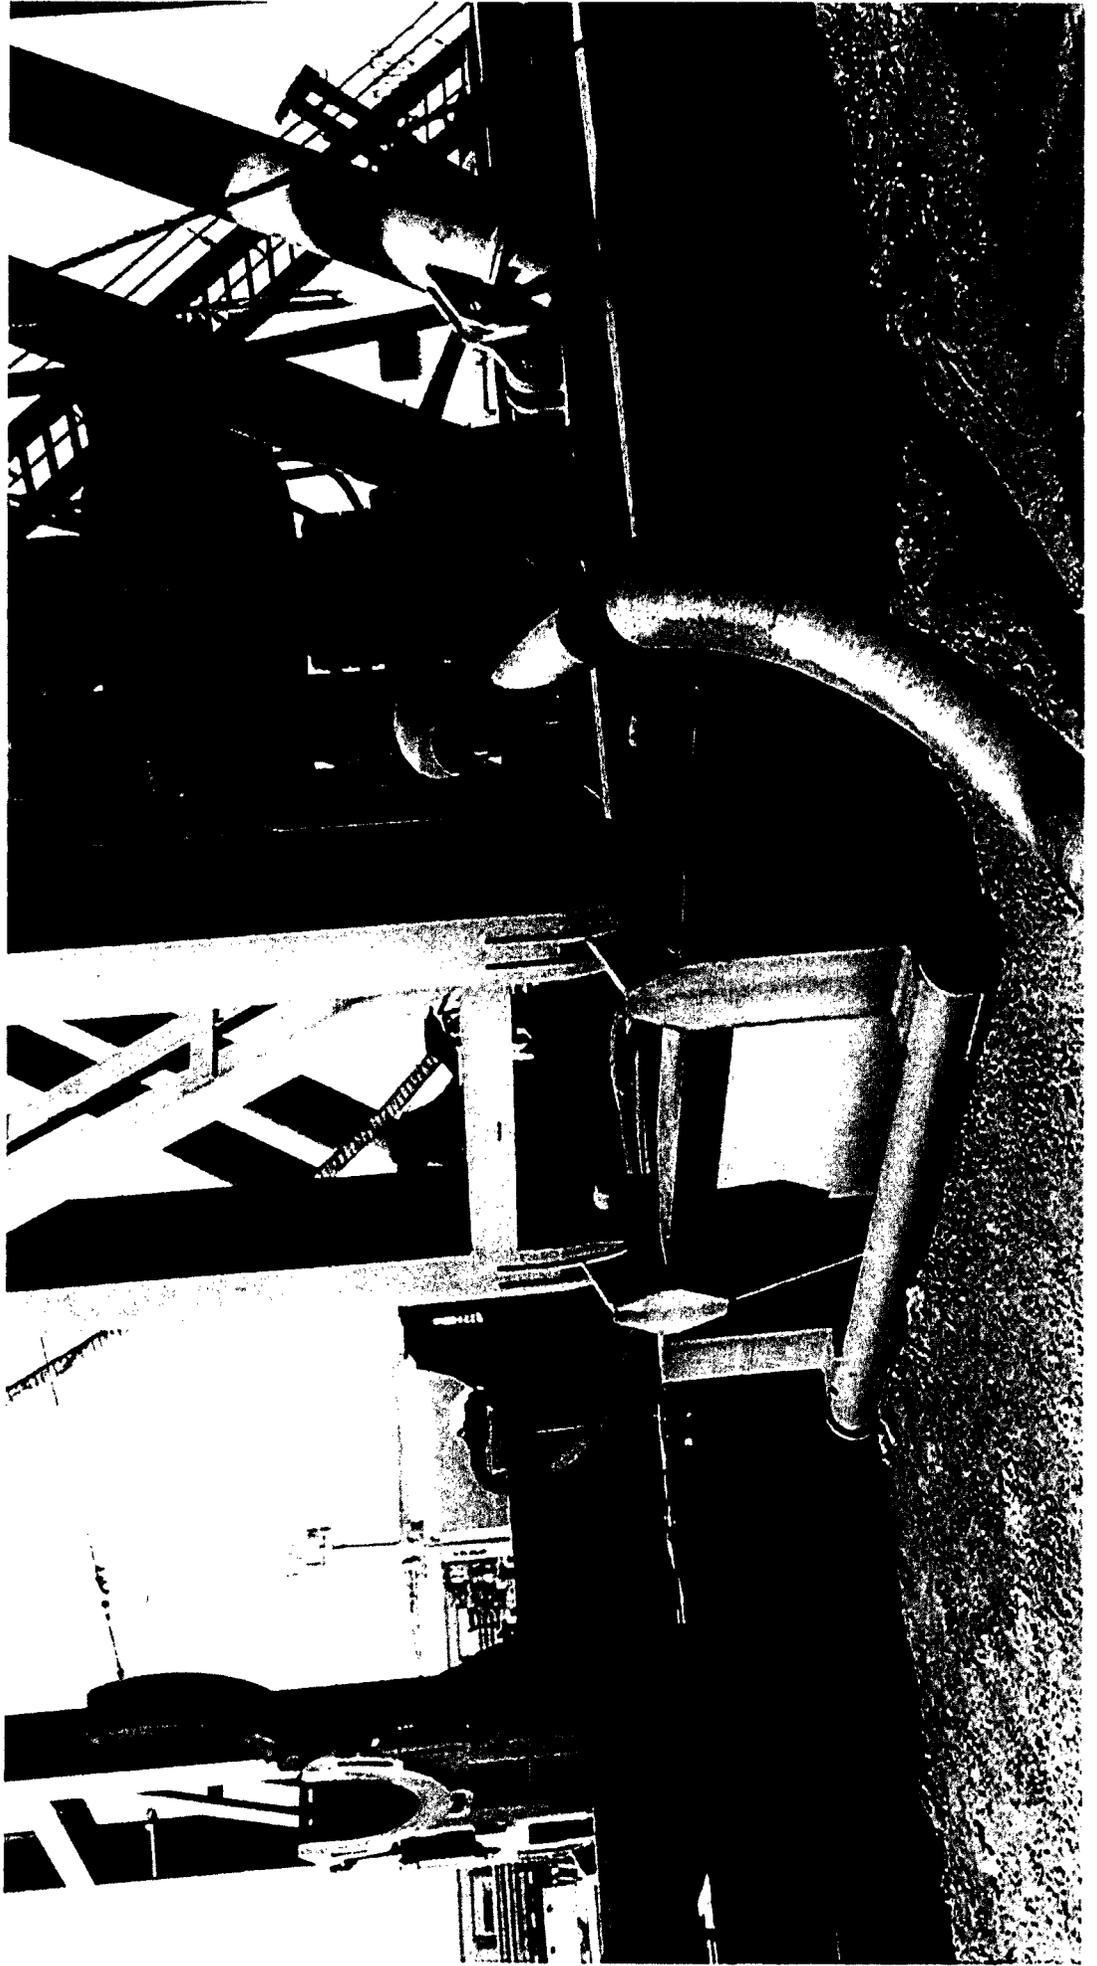


Exhibit F-1 – C o -Flex Hose Hydrostatic
 Test Davinci 7-18 Federal Com #9H
 Cimarex Energy Co.
 6-25S-27E
 Eddy County, NM



Midwest Hose & Specialty, Inc.

INTERNAL HYDROSTATIC TEST REPORT		
Customer: Oderco Inc		P.O. Number: odyd-271
HOSE SPECIFICATIONS		
Type: Stainless Steel Armor Choke & Kill Hose	Hose Length: 45'ft.	
I.D. 4 INCHES	O.D. 9 INCHES	
WORKING PRESSURE 10,000 PSI	TEST PRESSURE 15,000 PSI	BURST PRESSURE 0 PSI
COUPLINGS		
Stem Part No. OKC OKC	Ferrule No. OKC OKC	
Type of Coupling: Swage-It		
PROCEDURE		
<i>Hose assembly pressure tested with water at ambient temperature.</i>		
TIME HELD AT TEST PRESSURE 15 MIN.	ACTUAL BURST PRESSURE: 0 PSI	
Hose Assembly Serial Number: 79793	Hose Serial Number: OKC	
Comments:		
Date: 3/8/2011	Tested:	Approved: 

March 3, 2011

Internal Hydrostatic Test Graph

Customer: Houston

Pick Ticket #: 94260



Midwest Hose & Specialty, Inc.

Hose Specifications

Hose Type: C S I
L.D.: 4"
Working Pressure: 10000 PSI

Length: 45'
O.D.: 6.09"
Standard Safety Multiplier/Apply:

Verification

Type of Fittings: 4 1/16 10K
Die Size: 6.38"
Hose Serial #: 5544

Coupling Method: Swage
Final O.D.: 6.25"
Hose Assembly Serial #: 79793

Test Pressure: 15000 PSI
Time Held at Test Pressure: 11 Minutes
Actual Burst Pressure: 15483 PSI

Pressure Test

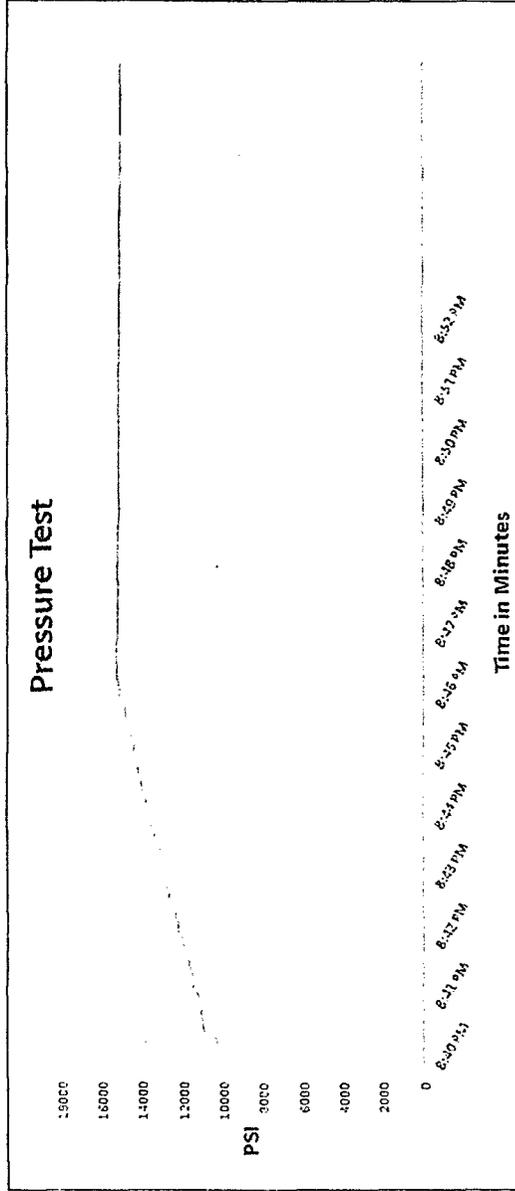


Exhibit F-2 – Co-Flex Hose
Davinci 7-18 Federal Com #9H
Cimarex Energy Co.
06-255-27E
Eddy County, NM



Midwest Hose & Specialty, Inc.

Certificate of Conformity	
Customer:	PO
DEM	ODYD-271
SPECIFICATIONS	
Sales Order	Dated:
79793	3/8/2011
<p>We hereby certify that the material supplied for the referenced purchase order to be true according to the requirements of the purchase order and current industry standards</p> <p>Supplier: Midwest Hose & Specialty, Inc. 10640 Tanner Road Houston, Texas 77041</p>	
Comments:	
Approved:	Date:
<i>James Garcia</i>	3/8/2011



Exhibit F -3- Co-Flex Hose
Davinci 7-18 Federal Com #9H
Cimarex Energy Co.
6-25S-27E
Eddy County, NM

Specification Sheet Choke & Kill Hose

The Midwest Hose & Specialty Choke & Kill hose is manufactured with only premium components. The reinforcement cables, inner liner and cover are made of the highest quality material to handle the tough drilling applications of today's industry. The end connections are available with API flanges, API male threads, hubs, hammer unions or other special fittings upon request. Hose assembly is manufactured to API 7K. This assembly is wrapped with fire resistant vermiculite coated fiberglass insulation, rated at 2000 degrees with stainless steel armor cover.

Working Pressure:	5,000 or 10,000 psi working pressure
Test Pressure:	10,000 or 15,000 psi test pressure
Reinforcement:	Multiple steel cables
Cover:	Stainless Steel Armor
Inner Tube:	Petroleum resistant, Abrasion resistant
End Fitting:	API flanges, API male threads, threaded or butt weld hammer unions, unbolt and other special connections
Maximum Length:	110 Feet
ID:	2-1/2", 3", 3-1/2", 4"
Operating Temperature:	-22 deg F to +180 deg F (-30 deg C to +82 deg C)

APD ID: 10400023870**Submission Date:** 10/25/2017Highlighted data
reflects the most
recent changes**Operator Name:** CIMAREX ENERGY COMPANY**Well Name:** DAVINCI 7-18 FEDERAL COM**Well Number:** 9H[Show Final Text](#)**Well Type:** CONVENTIONAL GAS WELL**Well Work Type:** Drill

Section 1 - Existing Roads

Will existing roads be used? YES**Existing Road Map:**

Davinci_7_18_Federal_Com_9H_Existing_Road_ROW_20171024153947.pdf

Existing Road Purpose: ACCESS,FLUID TRANSPORT**Row(s) Exist?** NO

ROW ID(s)

ID:**Do the existing roads need to be improved?** NO**Existing Road Improvement Description:****Existing Road Improvement Attachment:**

Section 2 - New or Reconstructed Access Roads

Will new roads be needed? NO

Section 3 - Location of Existing Wells

Existing Wells Map? YES**Attach Well map:**

Davinci_7_18_Federal_Com_9H_One_Mile_Radius_Map_20171024154324.pdf

Operator Name: CIMAREX ENERGY COMPANY

Well Name: DAVINCI 7-18 FEDERAL COM

Well Number: 9H

Existing Wells description:

Section 4 - Location of Existing and/or Proposed Production Facilities

Submit or defer a Proposed Production Facilities plan? SUBMIT

Production Facilities description: Battery Pad already existing

Production Facilities map:

Davinci_7_18_Federal_Com_9H_Existing_Production_facilities_20171024154347.pdf

Section 5 - Location and Types of Water Supply

Water Source Table

Water source use type: INTERMEDIATE/PRODUCTION CASING,
SURFACE CASING

Water source type: MUNICIPAL

Describe type:

Source latitude:

Source longitude:

Source datum:

Water source permit type: WATER RIGHT

Permit Number:

Source land ownership: FEDERAL

Water source transport method: PIPELINE,TRUCKING

Source transportation land ownership: FEDERAL

Water source volume (barrels): 5000

Source volume (acre-feet): 0.6444655

Source volume (gal): 210000

Water source and transportation map:

Davinci_7_18_Fed_Com_9H_Drilling_Water_Route_20171024154555.pdf

Water source comments:

New water well? NO

New Water Well Info

Well latitude:

Well Longitude:

Well datum:

Well target aquifer:

Est. depth to top of aquifer(ft):

Est thickness of aquifer:

Aquifer comments:

Aquifer documentation:

Operator Name: CIMAREX ENERGY COMPANY

Well Name: DAVINCI 7-18 FEDERAL COM

Well Number: 9H

Well depth (ft):

Well casing type:

Well casing outside diameter (in.):

Well casing inside diameter (in.):

New water well casing?

Used casing source:

Drilling method:

Drill material:

Grout material:

Grout depth:

Casing length (ft.):

Casing top depth (ft.):

Well Production type:

Completion Method:

Water well additional information:

State appropriation permit:

Additional information attachment:

Section 6 - Construction Materials

Construction Materials description: The drilling and testing operations will be conducted on a watered and compacted native soil grade. Soft spots will be covered with scoria, free of large rocks (3" diameter). Upon completion as a commercial producer the location will be covered with scoria, free of large rocks (3" dia.) from an existing privately owned gravel pit.

Construction Materials source location attachment:

Section 7 - Methods for Handling Waste

Waste type: GARBAGE

Waste content description: Garbage and trash produced during drilling and completion operations Amount of Waste: 32500 pounds

Amount of waste: 32500 pounds

Waste disposal frequency : Weekly

Safe containment description: N/A

Safe containmant attachment:

Waste disposal type: HAUL TO COMMERCIAL FACILITY **Disposal location ownership:** COMMERCIAL

Disposal type description:

Disposal location description: Windmill Spraying Service hauls trash to Lea County Landfill

Waste type: DRILLING

Waste content description: Drilling Fluids, drill cuttings, water and other waste produced from the well during drilling operations.

Amount of waste: 15000 barrels

Waste disposal frequency : Weekly

Safe containment description: N/A

Safe containmant attachment:

Waste disposal type: HAUL TO COMMERCIAL **Disposal location ownership:** COMMERCIAL

Operator Name: CIMAREX ENERGY COMPANY

Well Name: DAVINCI 7-18 FEDERAL COM

Well Number: 9H

FACILITY

Disposal type description:

Disposal location description: Haul to R360 commercial Disposal

Reserve Pit

Reserve Pit being used? NO

Temporary disposal of produced water into reserve pit?

Reserve pit length (ft.) **Reserve pit width (ft.)**

Reserve pit depth (ft.) **Reserve pit volume (cu. yd.)**

Is at least 50% of the reserve pit in cut?

Reserve pit liner

Reserve pit liner specifications and installation description

Cuttings Area

Cuttings Area being used? NO

Are you storing cuttings on location? NO

Description of cuttings location

Cuttings area length (ft.) **Cuttings area width (ft.)**

Cuttings area depth (ft.) **Cuttings area volume (cu. yd.)**

Is at least 50% of the cuttings area in cut?

WCuttings area liner

Cuttings area liner specifications and installation description

Section 8 - Ancillary Facilities

Are you requesting any Ancillary Facilities?: NO

Ancillary Facilities attachment:

Comments:

Operator Name: CIMAREX ENERGY COMPANY

Well Name: DAVINCI 7-18 FEDERAL COM

Well Number: 9H

Section 9 - Well Site Layout

Well Site Layout Diagram:

Davinci_7_18_Federal_Com_9H_Wellsite_Layout_20171024154826.pdf

Comments: Well Pad is already existing

Section 10 - Plans for Surface Reclamation

Type of disturbance: No New Surface Disturbance **Multiple Well Pad Name:** DAVINCI 7-18 FEDERAL COM

Multiple Well Pad Number: 6H-13H

Recontouring attachment:

Drainage/Erosion control construction: To control and prevent potentially contaminated precipitation from leaving the pad site, a perimeter berm and settlement pond will be installed. Contaminated water will be removed from pond, stored in waste tanks, and disposed of at a state approved facility. Standing water or puddles will not be allowed. Drainage ditches would be established and maintained on the pad and along access roads to divert water away from operations. Natural drainage areas disturbed during construction would be re-contoured to near original condition prior to construction. Erosion Control Best Management Practices would be used where necessary and consist of seeding, fiber rolls, water bars, silt fences, and temporary diversion dikes. Areas disturbed during construction that are no longer needed for operations would be obliterated, re-contoured to near original condition prior to construction. Erosion Control Best Management Practices would be used where necessary and consist of seeding, fiber rolls, water bars, silt fences, and temporary diversion dikes. Areas disturbed during construction that are no longer needed for operations would be obliterated, re-contoured, and reclaimed to near original condition to re-establish natural drainage

Drainage/Erosion control reclamation: All disturbed and re-contoured areas would be reseeded according to specifications. Approved seed mixtures would be certified weed free and consist of grasses, forbs, or shrubs similar to the surrounding area. Compacted soil areas may need to be obliterated and reclaimed to near natural conditions by re-contouring all slopes to facilitate and re-establish natural drainage

Well pad proposed disturbance (acres):	Well pad interim reclamation (acres): 6.4	Well pad long term disturbance (acres): 0
Road proposed disturbance (acres):	Road interim reclamation (acres): 0	Road long term disturbance (acres): 0
Powerline proposed disturbance (acres):	Powerline interim reclamation (acres):	Powerline long term disturbance (acres):
Pipeline proposed disturbance (acres):	Pipeline interim reclamation (acres): 3.6466942	Pipeline long term disturbance (acres): 0
Other proposed disturbance (acres):	Other interim reclamation (acres): 0	Other long term disturbance (acres): 0
Total proposed disturbance:	Total interim reclamation: 10.046694	Total long term disturbance: 0

Reconstruction method: After well plugging, all disturbed areas would be returned to the original contour or a contour that blends with the surrounding landform including roads unless the surface owner requests that they be left intact. In consultation with the surface owners it will be determined if any gravel or similar materials used to reinforce an area are to be removed, buried, or left in place during final reclamation. Salvaged topsoil, if any, would be re-spread evenly over the surfaces to be re-vegetated. As necessary, the soil surface would be prepared to provide a seedbed for re-establishment of desirable vegetation. Site preparation may include gouging, scarifying, dozer track-walking, mulching, or fertilizing. Reclamation, Re-vegetation, and Drainage: All disturbed and re-contoured areas would be reseeded using techniques outlined under Phase I and II of this plan or as specified by the land owner. Approved seed mixtures would be certified weed free and consist of grasses, forbs, or shrubs similar to the surrounding area. Compacted soil areas may need to be obliterated and reclaimed to near natural conditions by re-contouring all slopes to facilitate and re-establish natural drainage. **Topsoil redistribution:** Salvaged topsoil, if any, would be re-spread evenly over the surfaces to be re-vegetated

Operator Name: CIMAREX ENERGY COMPANY

Well Name: DAVINCI 7-18 FEDERAL COM

Well Number: 9H

Soil treatment: As necessary, the soil surface would be prepared to provide a seedbed for re-establishment of desirable vegetation. Site preparation may include gouging, scarifying, dozer track-walking, mulching or fertilizing.

Existing Vegetation at the well pad: N/A

Existing Vegetation at the well pad attachment:

Existing Vegetation Community at the road: n/A

Existing Vegetation Community at the road attachment:

Existing Vegetation Community at the pipeline: N/A

Existing Vegetation Community at the pipeline attachment:

Existing Vegetation Community at other disturbances: N/A

Existing Vegetation Community at other disturbances attachment:

Non native seed used? NO

Non native seed description:

Seedling transplant description:

Will seedlings be transplanted for this project? NO

Seedling transplant description attachment:

Will seed be harvested for use in site reclamation? NO

Seed harvest description:

Seed harvest description attachment:

Seed Management

Seed Table

Seed type:

Seed source:

Seed name:

Source name:

Source address:

Source phone:

Seed cultivar:

Seed use location:

PLS pounds per acre:

Proposed seeding season:

Seed Summary

Total pounds/Acre:

Operator Name: CIMAREX ENERGY COMPANY

Well Name: DAVINCI 7-18 FEDERAL COM

Well Number: 9H

Seed Type Pounds/Acre

Seed reclamation attachment:

Operator Contact/Responsible Official Contact Info

First Name:

Last Name:

Phone:

Email:

Seedbed prep:

Seed BMP:

Seed method:

Existing invasive species? NO

Existing invasive species treatment description:

Existing invasive species treatment attachment:

Weed treatment plan description: N/A

Weed treatment plan attachment:

Monitoring plan description: N/A

Monitoring plan attachment:

Success standards: N/A

Pit closure description: N/A

Pit closure attachment:

Section 11 - Surface Ownership

Disturbance type: WELL PAD

Describe:

Surface Owner: BUREAU OF LAND MANAGEMENT

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office:

Military Local Office:

Operator Name: CIMAREX ENERGY COMPANY

Well Name: DAVINCI 7-18 FEDERAL COM

Well Number: 9H

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Section 12 - Other Information

Right of Way needed? NO

Use APD as ROW?

ROW Type(s):

ROW Applications

SUPO Additional Information:

Use a previously conducted onsite? YES

Previous Onsite information: Onsite with BLM (Jeff Robertson, Robert Gomex and Brittany Chavez) And Cimarex (Barry Hunt) on October 6th 2016. Top soil north. no interim reclaim. No v-door or frac pad designation. construct a ditch and berm system on northeast corner of pad to divert water run off from Pad. Access road and gas lift/production line from southeast corner, southeast to lease road and to off site battery.

Other SUPO Attachment


Davinci_7_18_Federal_Com_9H_Gas_Lift_and_Flow_line_ROW_20171025080933.pdf

Davinci_7_18_Federal_Com_9H_Public_Access_Road_20171025080951.pdf




Davinci_7_18_Federal_Com_9H_Road_Description_20171025080955.pdf

Davinci_7_18_Federal_Com_9H_SUPO_20171025080955.pdf


DaVinci_7_18_Federal_Com_9H_Temp_Water_route_20171025080956.pdf



LINE TABLE		
LINE	DIRECTION	LENGTH
L1	N57°39'04"W	148.23'
L2	S86°19'07"W	62.54'
L3	N85°59'06"W	120.80'

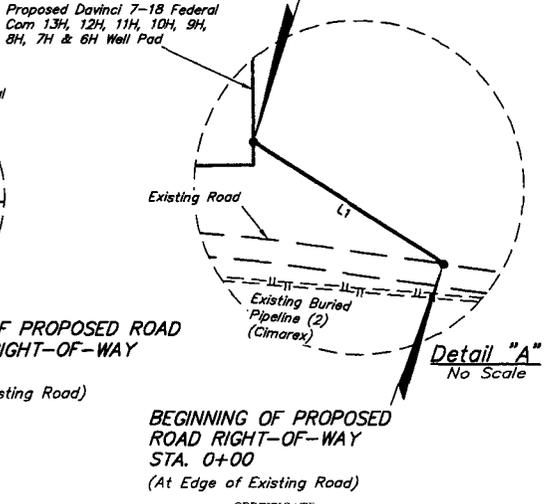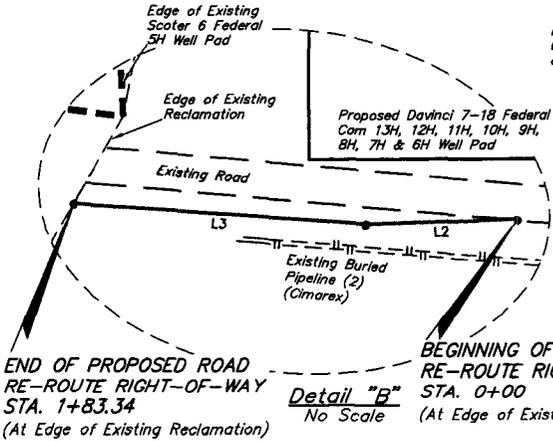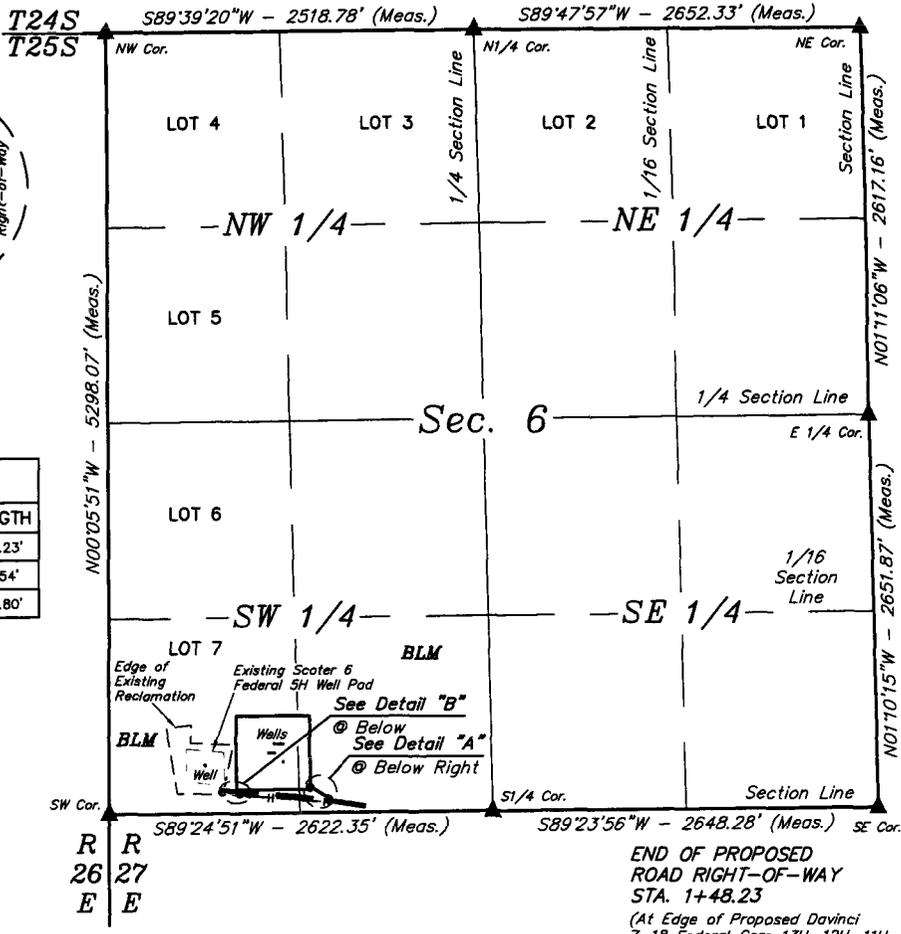

ACREAGE / LENGTH TABLE				
	OWNERSHIP	FEET	RODS	ACRES
ACCESS ROAD (SW 1/4)	BLM	148.23	8.98	0.102
ROAD RE-ROUTE (SW 1/4)	BLM	183.34	11.11	0.126
TOTAL		331.57	20.09	0.228



- NOTES:**
- The maximum grade of existing ground for the proposed access road is -1.0%.
 - The maximum grade of existing ground for the proposed road re-route is -2.8%.
 - Basis of bearing is a G.P.S. observation (Vertical Control Datum: NAVD88)

FILE: 61135-A1

CERTIFICATE
 THIS IS TO CERTIFY THAT THIS EASEMENT PLAT AND THE ACTUAL SURVEY OF THE GROUND UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY DIRECT SUPERVISION, THAT I AM RESPONSIBLE FOR THIS SURVEY, THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO, AND THAT IT IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

[Signature]
 23/82
 11-02-16
 PROFESSIONAL SURVEYOR



UELS, LLC
 Corporate Office * 85 South 200 East
 Vernal, UT 84078 * (435) 789-1017



CIMAREX ENERGY CO.
DAVINCI 7-18 FEDERAL COM
 13H, 12H, 11H, 10H, 9H, 8H, 7H & 6H
 SECTION 6, T25S, R27E, N.M.P.M.
 EDDY COUNTY, NEW MEXICO

SURVEYED BY	A.H., J.F.	10-17-16	SCALE
DRAWN BY	S.F.	10-24-16	1" = 1000'

ACCESS ROAD R-O-W EXHIBIT C-2

ROAD RIGHT-OF-WAY DESCRIPTION

A 30' WIDE RIGHT-OF-WAY 15' ON EACH SIDE OF THE FOLLOWING DESCRIBED CENTERLINE.

BEGINNING AT A POINT IN THE SE 1/4 SW 1/4 OF SECTION 6, T25S, R27E, N.M.P.M., WHICH BEARS N85°51'48"W 1130.10' FROM THE SOUTH 1/4 CORNER OF SAID SECTION 6, THENCE N57°39'04"W 148.23' TO A POINT IN THE SE 1/4 SW 1/4 OF SAID SECTION 6, WHICH BEARS N82°40'55"W 1262.67' FROM THE SOUTH 1/4 CORNER OF SAID SECTION 6. THE SIDE LINES OF SAID DESCRIBED RIGHT-OF-WAY BEING SHORTENED OR ELONGATED TO MEET THE GRANTOR'S PROPERTY LINES. BASIS OF BEARINGS IS A G.P.S. OBSERVATION. CONTAINS 0.102 ACRES MORE OR LESS.

BEGINNING OF ROAD STA. 0+00 BEARS N85°51'48"W 1130.10' FROM THE SOUTH 1/4 CORNER OF SECTION 6, T25S, R27E, N.M.P.M.

END OF ROAD STA. 1+48.23 BEARS N82°40'55"W 1262.67' FROM THE SOUTH 1/4 CORNER OF SECTION 6, T25S, R27E, N.M.P.M.

ROAD RE-ROUTE RIGHT-OF-WAY DESCRIPTION

A 30' WIDE RIGHT-OF-WAY 15' ON EACH SIDE OF THE FOLLOWING DESCRIBED CENTERLINE.

BEGINNING AT A POINT IN LOT 7 OF SECTION 6, T25S, R27E, N.M.P.M., WHICH BEARS N81°17'42"E 966.91' FROM THE SOUTHWEST CORNER OF SAID SECTION 6, THENCE S88°19'07"W 62.54'; THENCE N85°59'06"W 120.80' TO A POINT IN LOT 7 OF SAID SECTION 6, WHICH BEARS N78°48'12"E 787.75' FROM THE SOUTHWEST CORNER OF SAID SECTION 6. THE SIDE LINES OF SAID DESCRIBED RIGHT-OF-WAY BEING SHORTENED OR ELONGATED TO MEET THE GRANTOR'S PROPERTY LINES. BASIS OF BEARINGS IS A G.P.S. OBSERVATION. CONTAINS 0.126 ACRES MORE OR LESS.

BEGINNING OF ROAD RE-ROUTE STA. 0+00 BEARS N81°17'42"E 966.91' FROM THE SOUTHWEST CORNER OF SECTION 6, T25S, R27E, N.M.P.M.

END OF ROAD RE-ROUTE STA. 1+83.34 BEARS N78°48'12"E 787.75' FROM THE SOUTHWEST CORNER OF SECTION 6, T25S, R27E, N.M.P.M.

DAVINCI 7-18 FEDERAL COM 13H, 12H, 11H, 10H, 9H, 8H, 7H & 6H ACCESS ROAD R-O-W			
SECTION CORNER	SECTION CORNER DESC.	LATITUDE (NAD 83)	LONGITUDE (NAD 83)
NW COR. SEC. 6, T25S, R27E	2.5" IRON PIPE WITH BRASS CAP	N 32°09'58.69"	W 104°14'16.85"
N1/4 COR. SEC. 6, T25S, R27E	1" IRON PIPE WITH BRASS CAP	N 32°09'58.84"	W 104°13'47.56"
NE COR. SEC. 6, T25S, R27E	1.5" IRON PIPE WITH BRASS CAP	N 32°09'58.93"	W 104°13'16.71"
E1/4 COR. SEC. 6, T25S, R27E	1/2" IRON PIPE WITH BRASS CAP	N 32°09'33.04"	W 104°13'16.08"
SE COR. SEC. 6, T25S, R27E	2" IRON PIPE WITH BRASS CAP	N 32°09'06.81"	W 104°13'15.46"
S1/4 COR. SEC. 6, T25S, R27E	1" IRON PIPE WITH BRASS CAP	N 32°09'06.54"	W 104°13'46.25"
SW COR. SEC. 6, T25S, R27E	2" IRON PIPE WITH CAP	N 32°09'06.27"	W 104°14'16.75"

DAVINCI 7-18 FEDERAL COM 13H, 12H, 11H, 10H, 9H, 8H, 7H & 6H ACCESS ROAD R-O-W			
NUMBER	STATION	LATITUDE (NAD 83)	LONGITUDE (NAD 83)
BEGIN	0+00	N 32°09'07.34"	W 104°13'59.36"
END	1+48.23	N 32°09'08.13"	W 104°14'00.82"

DAVINCI 7-18 FEDERAL COM 13H, 12H, 11H, 10H, 9H, 8H, 7H & 6H ROAD RE-ROUTE ROAD R-O-W			
NUMBER	STATION	LATITUDE (NAD 83)	LONGITUDE (NAD 83)
BEGIN	0+00	N 32°09'07.72"	W 104°14'05.63"
1	0+62.54	N 32°09'07.70"	W 104°14'06.36"
END	1+83.34	N 32°09'07.79"	W 104°14'07.76"

CERTIFICATE
THIS IS TO CERTIFY THAT THIS EASEMENT PLAT AND THE ACTUAL SURVEY ON THE GROUND UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY DIRECT SUPERVISION, THAT I AM RESPONSIBLE FOR THIS SURVEY, THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO, AND THAT IT IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.



FILE: 61135-A2

Sheet 2 of 2




UELS, LLC
Corporate Office * 85 South 200 East
Vernal, UT 84078 * (435) 789-1017



CIMAREX ENERGY CO.
DAVINCI 7-18 FEDERAL COM
13H, 12H, 11H, 10H, 9H, 8H, 7H & 6H
SECTION 6, T25S, R27E, N.M.P.M.
EDDY COUNTY, NEW MEXICO


SURVEYED BY	A.H., J.F.	10-17-16	SCALE
DRAWN BY	S.F.	10-24-16	N/A

ACCESS ROAD R-O-W EXHIBIT C-2




LINE TABLE		
LINE	DIRECTION	LENGTH
L1	N75°19'41"W	49.81'
L2	N75°27'45"W	49.85'


END OF PROPOSED ROAD
"A" RIGHT-OF-WAY
STA. 0+49.81
(At Edge of Proposed
Davinci 7-18 Federal Battery)

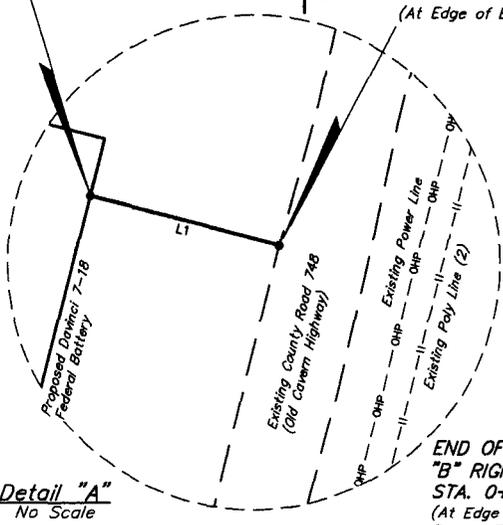

BEGINNING OF PROPOSED
ROAD "A" RIGHT-OF-WAY
STA. 0+00
(At Edge of Existing Road)

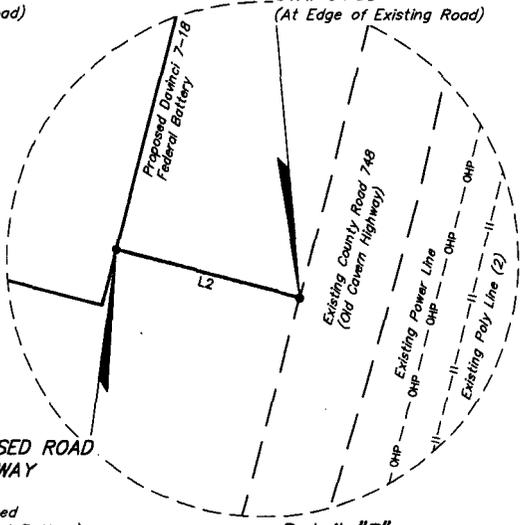

END OF PROPOSED ROAD
"B" RIGHT-OF-WAY
STA. 0+49.85
(At Edge of Proposed
Davinci 7-18 Federal Battery)



ACREAGE / LENGTH TABLE				
	OWNERSHIP	FEET	RODS	ACRES
ACCESS ROAD "A" (NW 1/4)	BLM	49.81	3.02	0.034
ACCESS ROAD "B" (NW 1/4)	BLM	49.85	3.02	0.034
TOTAL		99.66	6.04	0.068

▲ = SECTION CORNERS LOCATED.

NOTES:

- The maximum grade of existing ground for proposed access road "A" is +2.5%.
- The maximum grade of existing ground for proposed access road "B" is +1.7%.
- Basis of bearing is a G.P.S. observation (Vertical Control Datum: NAVD88)



UELS, LLC
Corporate Office * 85 South 200 East
Vernal, UT 84078 * (435) 789-1017

FILE: 61146-A1

Sheet 1 of 2

CIMAREX ENERGY CO.

**DAVINCI 7-18 FEDERAL BATTERY
SECTION 7, T25S, R27E, N.M.P.M.
EDDY COUNTY, NEW MEXICO**

SURVEYED BY	A.H., J.F.	10-17-16	SCALE
DRAWN BY	S.E.	10-27-16	1" = 1000'

ACCESS ROAD R-O-W EXHIBIT C-2

CERTIFICATE
THIS IS TO CERTIFY THAT THIS EASEMENT PLAT AND THE ACTUAL SURVEY ON THE GROUND UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY DIRECT SUPERVISION; THAT I AM RESPONSIBLE FOR THIS SURVEY; THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO; AND THAT IT IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

Paul B. Buckle
23782
11-02-16
PROFESSIONAL SURVEYOR

ROAD "A" RIGHT-OF-WAY DESCRIPTION

A 30' WIDE RIGHT-OF-WAY 15' ON EACH SIDE OF THE FOLLOWING DESCRIBED CENTERLINE.

BEGINNING AT A POINT IN THE NE 1/4 NW 1/4 OF SECTION 7, T25S, R27E, N.M.P.M., WHICH BEARS S29°21'46"W 1235.56' FROM THE NORTH 1/4 CORNER OF SAID SECTION 7, THENCE N75°19'41"W 49.81' TO A POINT IN THE NE 1/4 NW 1/4 OF SAID SECTION 12, WHICH BEARS S31°34'25"W 1249.13' FROM THE NORTH 1/4 CORNER OF SAID SECTION 7. THE SIDE LINES OF SAID DESCRIBED RIGHT-OF-WAY BEING SHORTENED OR ELONGATED TO MEET THE GRANTOR'S PROPERTY LINES. BASIS OF BEARINGS IS A G.P.S. OBSERVATION. CONTAINS 0.034 ACRES MORE OR LESS.

BEGINNING OF ROAD "A" STA. 0+00 S29°21'46"W 1235.56' FROM THE NORTH 1/4 CORNER OF SECTION 7, T25S, R27E, N.M.P.M.

END OF ROAD "A" STA. 0+49.81 BEARS S31°34'25"W 1249.13' FROM THE NORTH 1/4 CORNER OF SECTION 7, T25S, R27E, N.M.P.M.

ROAD "B" RIGHT-OF-WAY DESCRIPTION

A 30' WIDE RIGHT-OF-WAY 15' ON EACH SIDE OF THE FOLLOWING DESCRIBED CENTERLINE.

BEGINNING AT A POINT IN THE SE 1/4 NW 1/4 OF SECTION 7, T25S, R27E, N.M.P.M., WHICH BEARS S25°57'47"W 1595.92' FROM THE NORTH 1/4 CORNER OF SAID SECTION 7, THENCE N75°27'45"W 49.85' TO A POINT IN THE SE 1/4 NW 1/4 OF SAID SECTION 7, WHICH BEARS S27°42'22"W 1606.54' FROM THE NORTH 1/4 CORNER OF SAID SECTION 7. THE SIDE LINES OF SAID DESCRIBED RIGHT-OF-WAY BEING SHORTENED OR ELONGATED TO MEET THE GRANTOR'S PROPERTY LINES. BASIS OF BEARINGS IS A G.P.S. OBSERVATION. CONTAINS 0.034 ACRES MORE OR LESS.

BEGINNING OF ROAD "B" STA. 0+00 BEARS S25°57'47"W 1595.92' FROM THE NORTH 1/4 CORNER OF SECTION 7, T25S, R27E, N.M.P.M.


END OF ROAD "B" STA. 0+49.85 BEARS S27°42'22"W 1606.54' FROM THE NORTH 1/4 CORNER OF SECTION 7, T25S, R27E, N.M.P.M.

DAVINCI 7-18 FEDERAL BATTERY ACCESS ROAD R-O-W			
SECTION CORNER	SECTION CORNER DESC.	LATITUDE (NAD 83)	LONGITUDE (NAD 83)
NW COR. SEC. 7, T25S, R27E	2" IRON PIPE WITH BRASS CAP	N 32°09'06.27"	W 104°14'16.75"
N1/4 COR. SEC. 7, T25S, R27E	1" IRON PIPE WITH BRASS CAP	N 32°09'06.54"	W 104°13'46.25"
NE COR. SEC. 7, T25S, R27E	2" IRON PIPE WITH BRASS CAP	N 32°09'06.81"	W 104°13'15.46"
E1/4 COR. SEC. 7, T25S, R27E	1" IRON PIPE WITH BRASS CAP	N 32°08'40.58"	W 104°13'15.36"
SE COR. SEC. 7, T25S, R27E	2" IRON PIPE WITH BRASS CAP	N 32°08'14.39"	W 104°13'15.27"
SW COR. SEC. 7, T25S, R27E	2" IRON PIPE WITH CAP	N 32°08'13.86"	W 104°14'16.64"
W 1/4 COR. SEC. 7, T25S, R27E	1" IRON PIPE WITH CAP	N 32°08'40.07"	W 104°14'16.69"

DAVINCI 7-18 FEDERAL BATTERY ACCESS ROAD R-O-W "A"			
NUMBER	STATION	LATITUDE (NAD 83)	LONGITUDE (NAD 83)
BEGIN	0+00	N 32°08'55.88"	W 104°13'53.30"
END	0+49.81	N 32°08'56.01"	W 104°13'53.86"

DAVINCI 7-18 FEDERAL BATTERY ACCESS ROAD R-O-W "B"			
NUMBER	STATION	LATITUDE (NAD 83)	LONGITUDE (NAD 83)
BEGIN	0+00	N 32°08'52.34"	W 104°13'54.38"
END	0+49.85	N 32°08'52.46"	W 104°13'54.94"

CERTIFICATE
 THIS IS TO CERTIFY THAT THIS EASEMENT PLAT AND THE ACTUAL SURVEY ON THE GROUND UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY DIRECT SUPERVISION THAT I AM RESPONSIBLE FOR THIS SURVEY. THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO, AND THAT IT IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.



FILE: 61146-A1

Sheet 2 of 2

N

CIMAREX ENERGY CO.


**DAVINCI 7-18 FEDERAL BATTERY
 SECTION 7, T25S, R27E, N.M.P.M.
 EDDY COUNTY, NEW MEXICO**

SURVEYED BY	A.H., J.F.	10-17-16	SCALE
DRAWN BY	S.F.	10-24-16	N/A

ACCESS ROAD R-O-W EXHIBIT C-2



UELS, LLC
 Corporate Office * 85 South 200 East
 Vernal, UT 84078 * (435) 789-1017

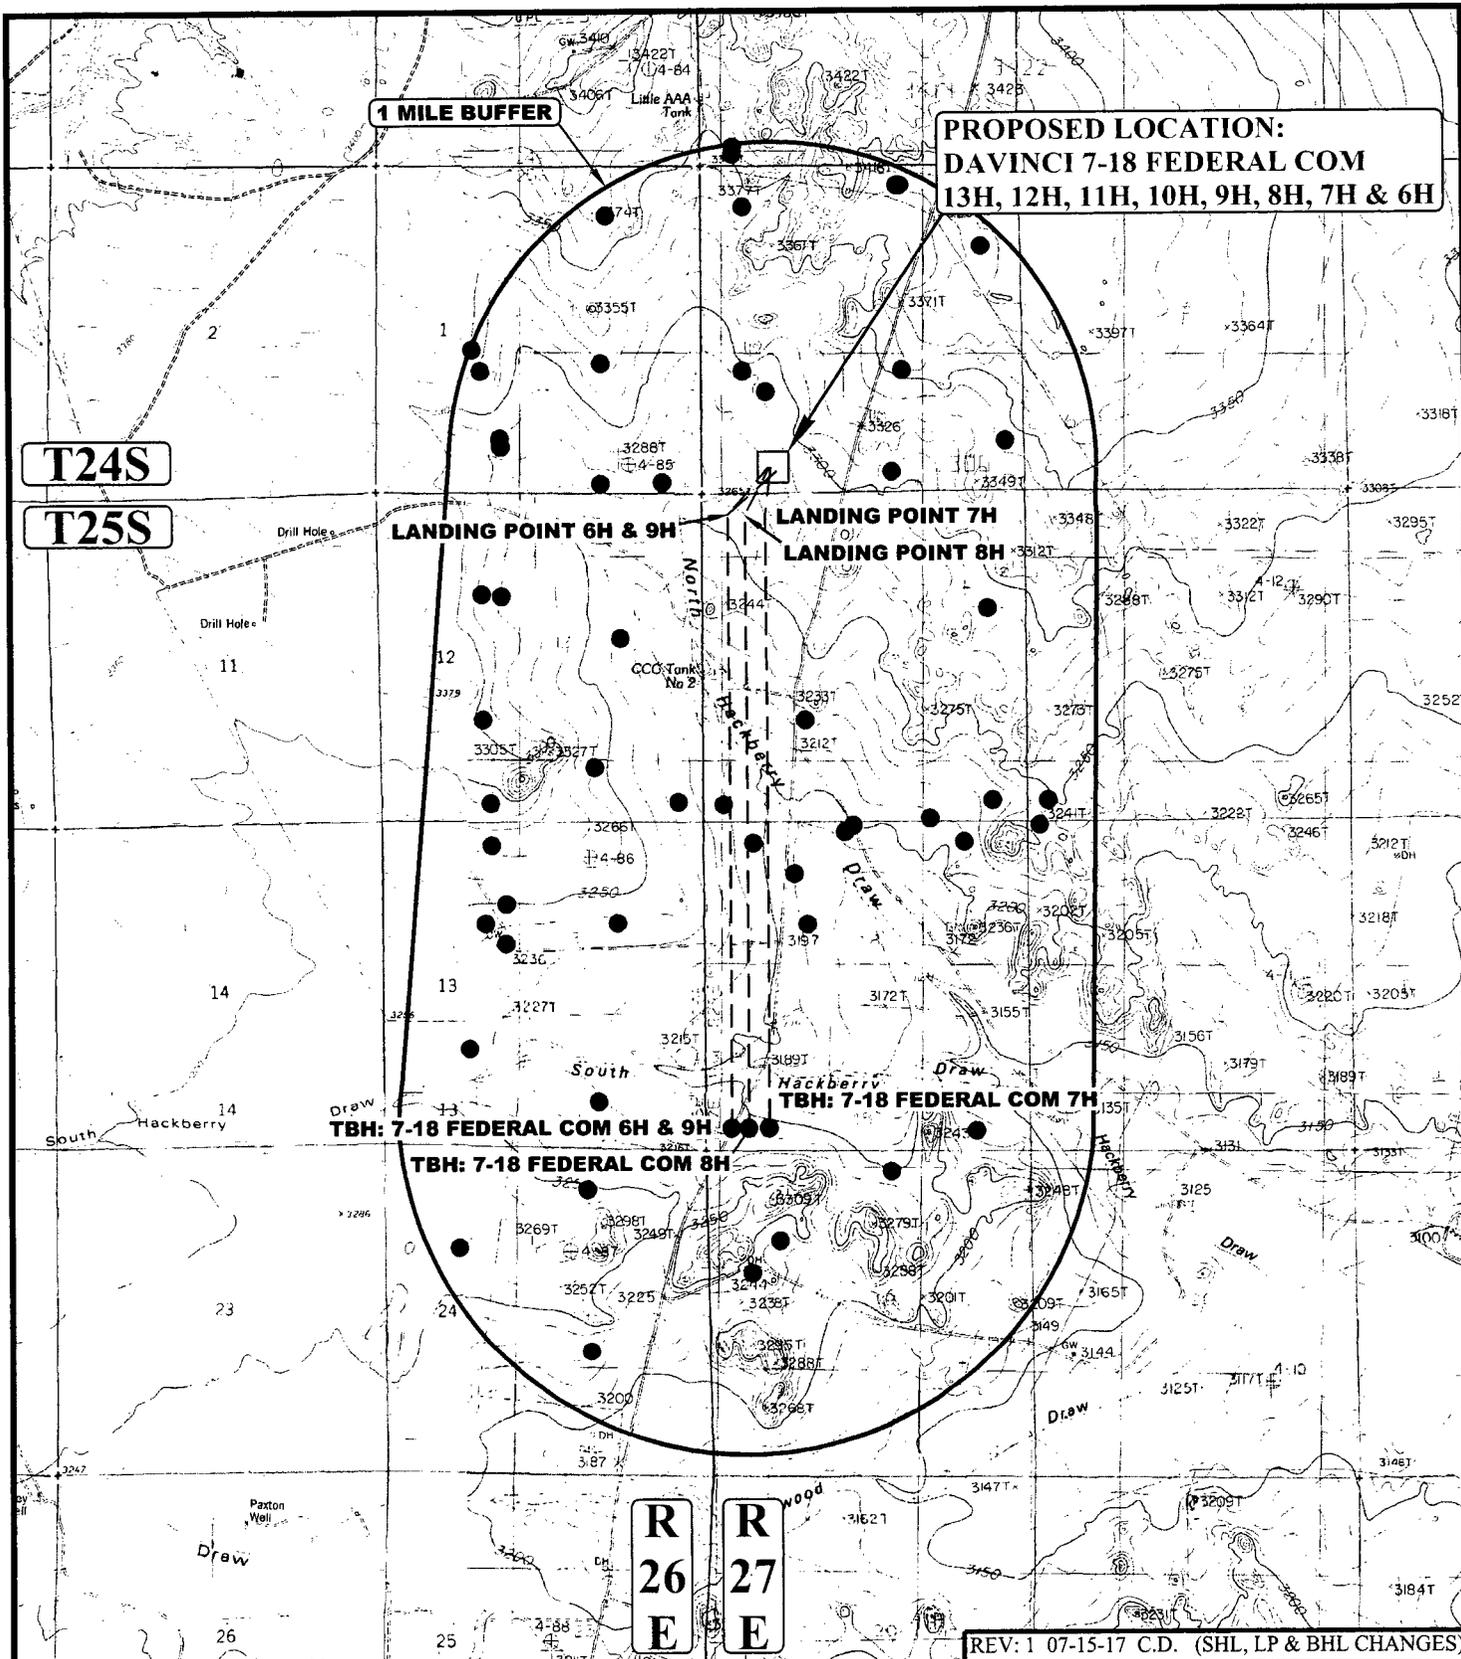

**PROPOSED LOCATION:
DAVINCI 7-18 FEDERAL COM
13H, 12H, 11H, 10H, 9H, 8H, 7H & 6H**

1 MILE BUFFER

T24S

T25S

LANDING POINT 6H & 9H

LANDING POINT 7H

LANDING POINT 8H

TBH: 7-18 FEDERAL COM 6H & 9H

TBH: 7-18 FEDERAL COM 8H

TBH: 7-18 FEDERAL COM 7H

**R
26
E**

**R
27
E**

REV: 1 07-15-17 C.D. (SHL, LP & BHL CHANGES)

LEGEND:
● EXISTING WELLS



UELS, LLC
Corporate Office * 85 South 200 East
Vernal, UT 84078 * (435) 789-1017






CIMAREX ENERGY CO.

**DAVINCI 7-18 FEDERAL COM
13H, 12H, 11H, 10H, 9H, 8H, 7H & 6H
LOT 7, SECTION 6, T25S, R27E, N.M.P.M.
EDDY COUNTY, NEW MEXICO**

SURVEYED BY	A.H., J.F.	10-17-16	SCALE
DRAWN BY	T.J.	10-28-16	1 : 36,000
ONE MILE RADIUS PLAT			EXHIBIT A

CERTIFICATE
 THIS MAP HAS BEEN PRODUCED ACCORDING TO PROCEDURES THAT HAVE BEEN DEMONSTRATED TO PRODUCE DATA THAT MEETS OR EXCEEDS THE MINIMUM STANDARDS FOR A TOPOGRAPHIC MAP COMPILED AT A SCALE OF 1" = 80' WITH A CONTOUR INTERVAL OF 2'

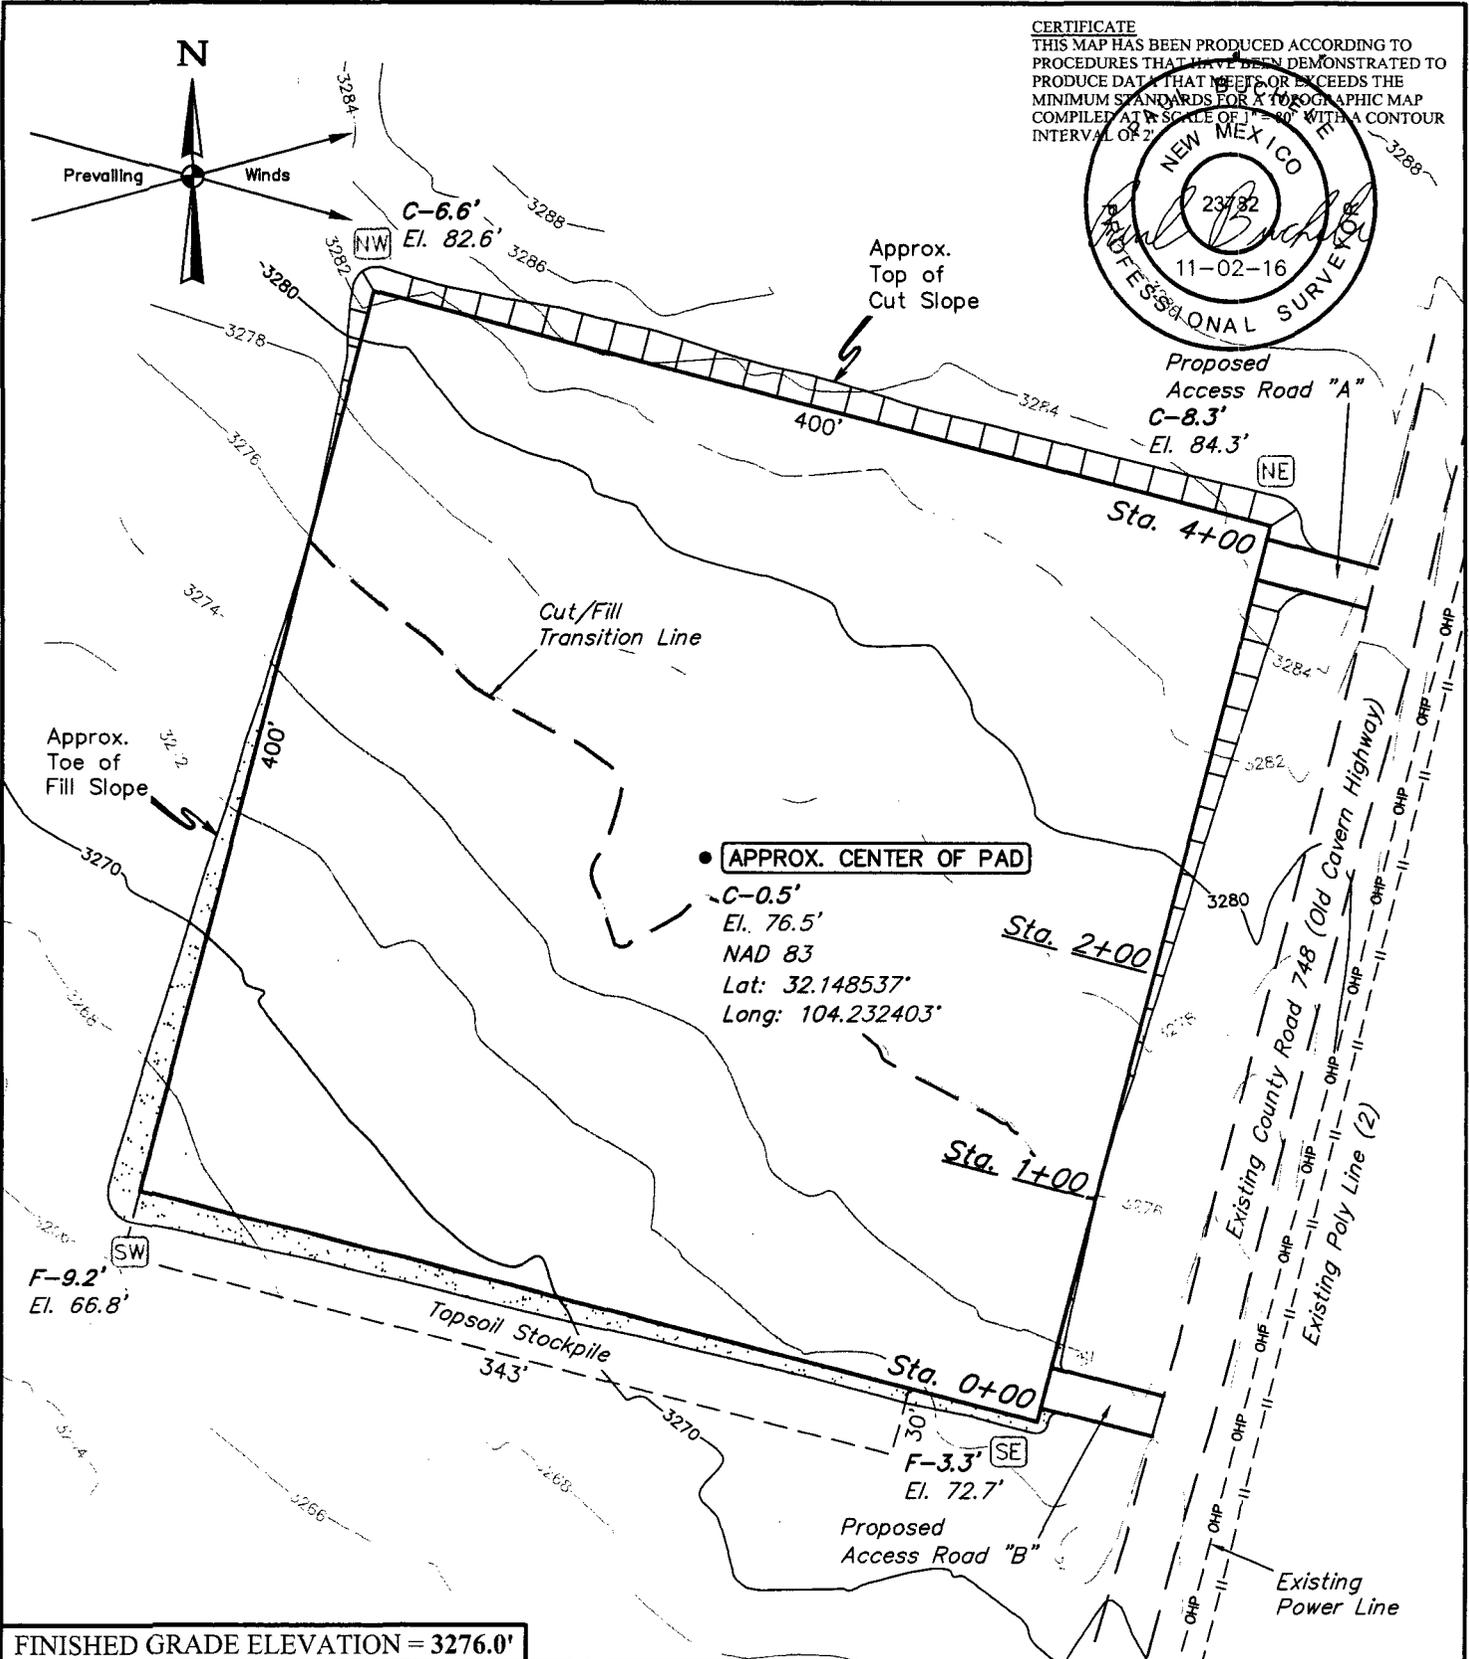

FINISHED GRADE ELEVATION = 3276.0'

NOTES:

- Contours shown at 2' intervals.
- Cut/Fill slopes 1 1/2:1 (Typ. except where noted)
- Underground utilities shown on this sheet are for visualization purposes only, actual locations to be determined prior to construction.

CIMAREX ENERGY CO.


DAVINCI 7-18 FEDERAL BATTERY
 E 1/2 NW 1/4, SECTION 7, T25S, R27E, N.M.P.M.
 EDDY COUNTY, NEW MEXICO



UELS, LLC
 Corporate Office * 85 South 200 East
 Vernal, UT 84078 * (435) 789-1017

SURVEYED BY	A.H., J.F.	10-17-16	SCALE
DRAWN BY	S.F.	10-27-16	1" = 80'
LOCATION LAYOUT		EXHIBIT D	

1" = 40'
 X-Section
 Scale
 1" = 100'

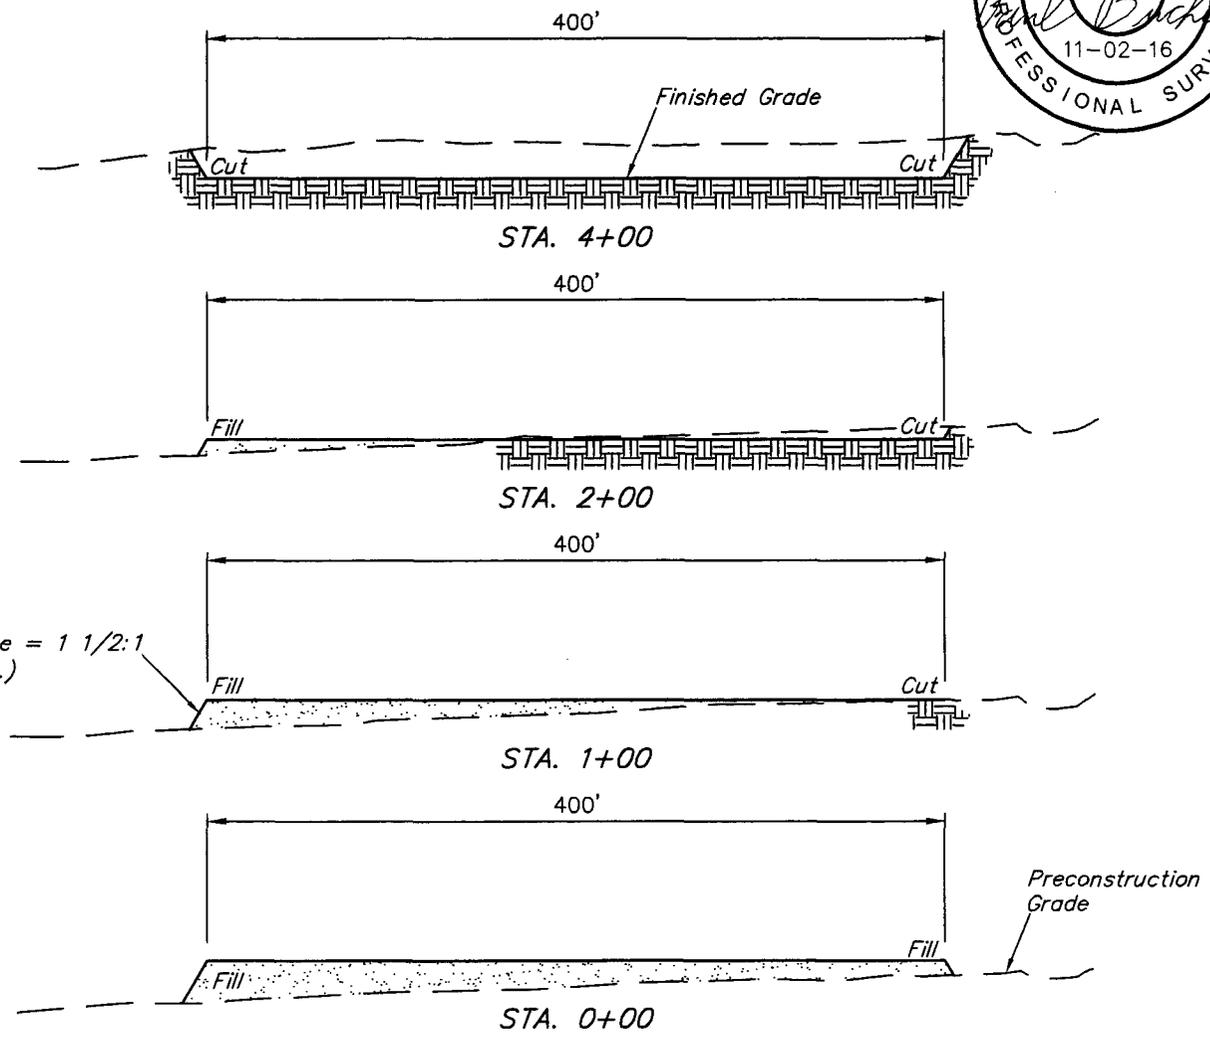

APPROXIMATE EARTHWORK QUANTITIES	
(3") TOPSOIL STRIPPING	1,610 Cu. Yds.
REMAINING LOCATION	10,870 Cu. Yds.
TOTAL CUT	12,480 Cu. Yds.
FILL	10,870 Cu. Yds.
EXCESS MATERIAL	1,610 Cu. Yds.
TOPSOIL	1,610 Cu. Yds.
EXCESS UNBALANCE (After Interim Rehabilitation)	0 Cu. Yds.

APPROXIMATE SURFACE DISTURBANCE AREAS		
	DISTANCE	ACRES
WELL SITE DISTURBANCE	NA	±4.145
30' WIDE ACCESS ROAD R-O-W DISTURBANCE	±99.66'	±0.068
30' WIDE SWD PIPELINE R-O-W DISTURBANCE	±4,828.02'	±3.325
30' WIDE GAS LIFT PIPELINE R-O-W DISTURBANCE	±3,343.23'	±2.303
30' WIDE GAS SALES PIPELINE R-O-W DISTURBANCE	±3,338.24'	±2.299
30' WIDE POWER LINE R-O-W DISTURBANCE	±5,123.91'	±3.529
TOTAL SURFACE USE AREA		±15.669

NOTES:

- Fill quantity includes 5% for compaction.
- Cut/Fill slopes 1 1/2:1 (Typ. except where noted)



CIMAREX ENERGY CO.

DAVINCI 7-18 FEDERAL BATTERY
 E 1/2 NW 1/4, SECTION 7, T25S, R27E, N.M.P.M.
 EDDY COUNTY, NEW MEXICO



UELS, LLC
 Corporate Office * 85 South 200 East
 Vernal, UT 84078 * (435) 789-1017

SURVEYED BY	A.H., J.F.	10-17-16	SCALE
DRAWN BY	S.F.	10-27-16	AS SHOWN
TYPICAL CROSS SECTIONS EXHIBIT D			



600' X 600' Archaeological Survey Boundary

Existing Power Line

Proposed Access Road "A"

Existing County Road 748
(Old Cavern Highway)

Existing Poly Line (2)

Topsoil Stockpile

Proposed Access Road "B"

LINE TABLE		
LINE	DIRECTION	LENGTH
L1	S76°E	91'
L2	S76°E	85'
L3	N75°W	60'

NOTES:

CIMAREX ENERGY CO.

DAVINCI 7-18 FEDERAL BATTERY
 E 1/2 NW 1/4, SECTION 7, T25S, R27E, N.M.P.M.
 EDDY COUNTY, NEW MEXICO

SURVEYED BY	A.H., J.F.	10-17-16	SCALE
DRAWN BY	S.F.	10-27-16	1" = 100'
ARCHAEOLOGICAL SURVEY BOUNDARY			EXHIBIT D



UELS, LLC
 Corporate Office * 85 South 200 East
 Vernal, UT 84078 * (435) 789-1017

Untitled Map

Write a description for your map.




Pulley Road Fresh Water
Head west on Pulley Rd toward US-285. Turn right.

Da Vinci 7-18 Fed Com 6H

Legend

- Da Vinci 7-18 Federal Com 6H-13H
- Pulley Road Fresh Water Station

4 mi

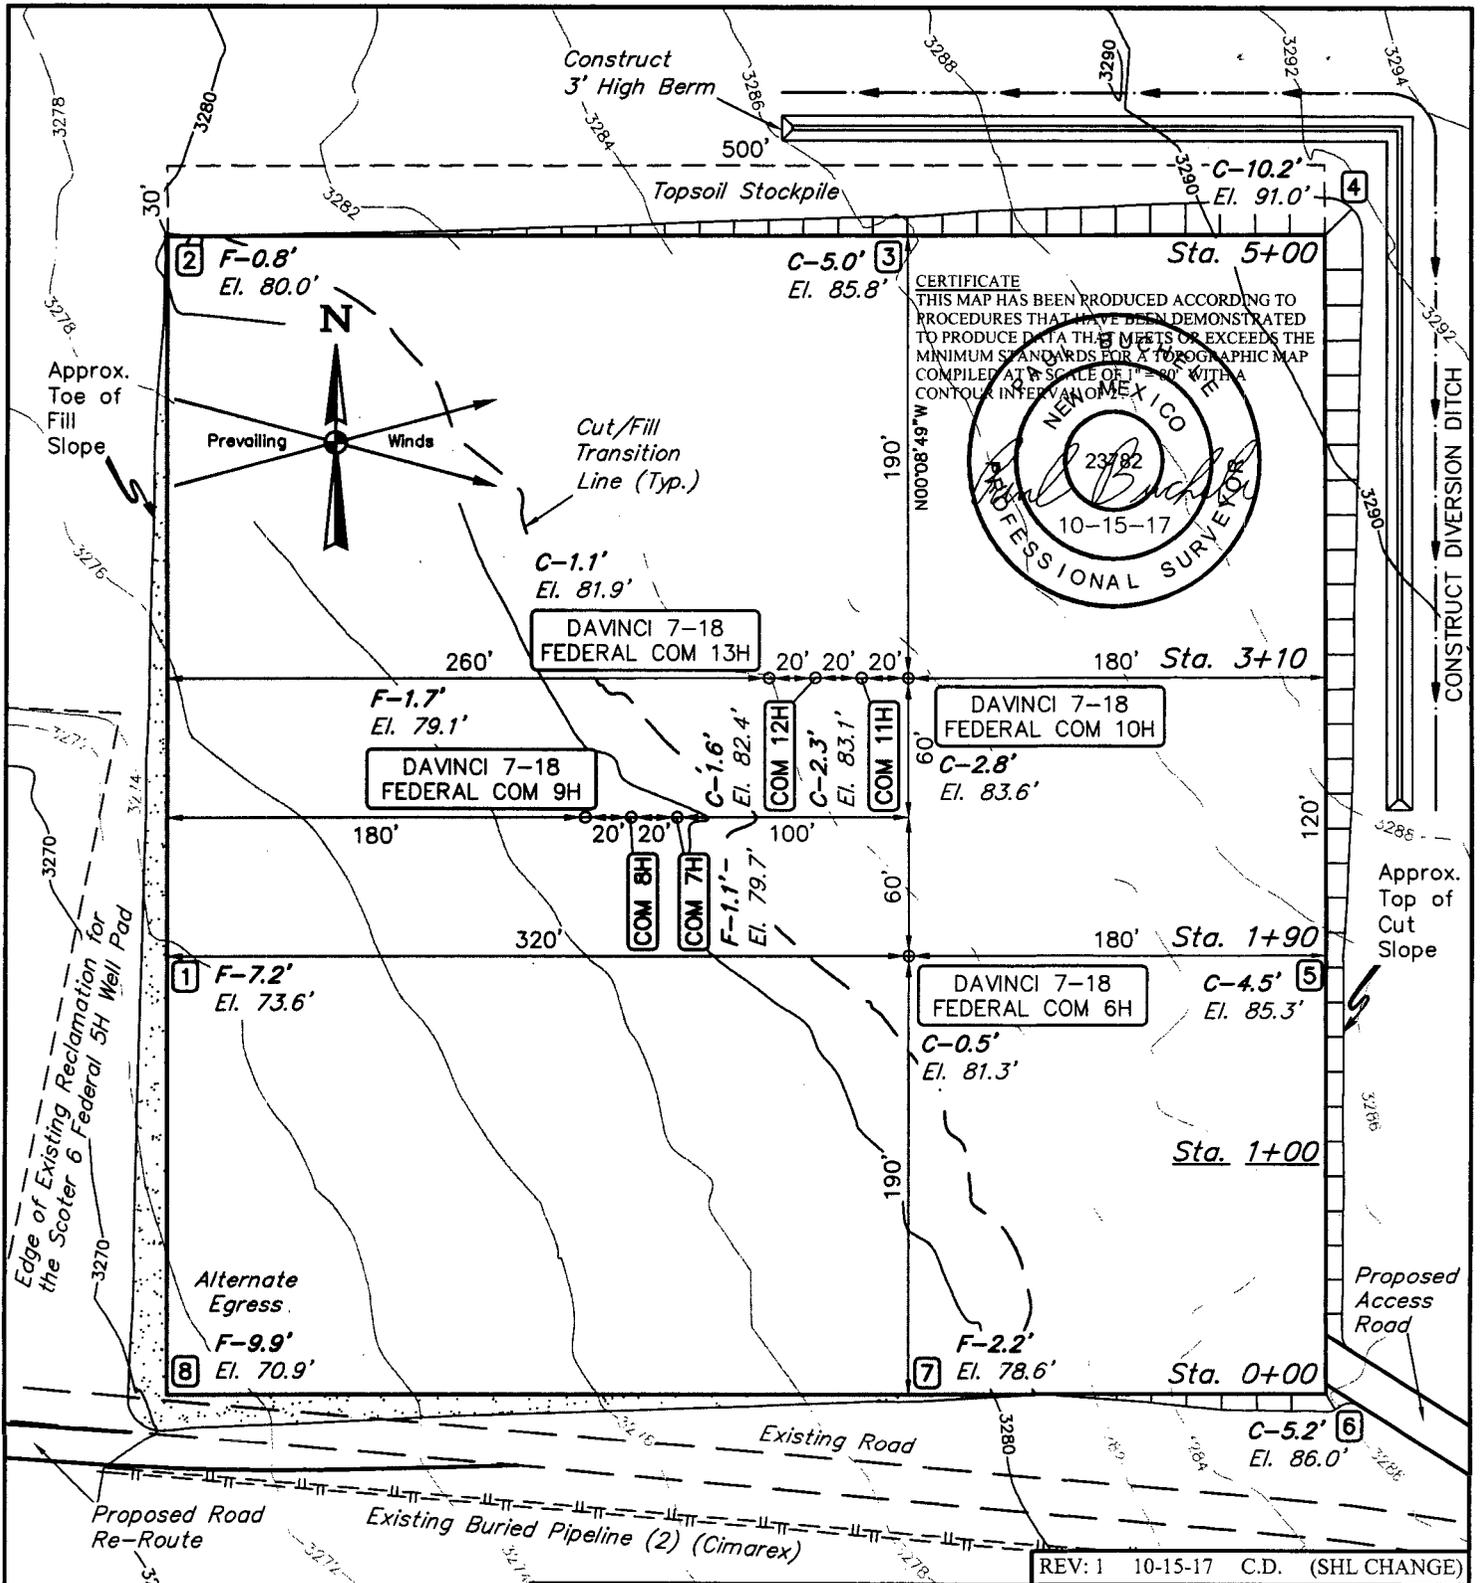

CERTIFICATE
 THIS MAP HAS BEEN PRODUCED ACCORDING TO PROCEDURES THAT HAVE BEEN DEMONSTRATED TO PRODUCE DATA THAT MEETS OR EXCEEDS THE MINIMUM STANDARDS FOR A TOPOGRAPHIC MAP COMPILED AT A SCALE OF 1" = 80' WITH A CONTOUR INTERVAL OF 2'.

NEW MEXICO
 23782
 PROFESSIONAL SURVEYOR
 10-15-17

REV: 1 10-15-17 C.D. (SHL CHANGE)

FINISHED GRADE ELEVATION = 3280.8'

NOTE: Earthwork calculations require a fill @ some location stakes for balance. All fill is to be compacted to a minimum of 95% of the maximum dry density obtained by AASHTO method t-99.

- NOTES:**
- Contours shown at 2' intervals.
 - Cut/Fill slopes 1 1/2:1 (Typ. except where noted)
 - Underground utilities shown on this sheet are for visualization purposes only, actual locations to be determined prior to construction.



UELS, LLC
 Corporate Office * 85 South 200 East
 Vernal, UT 84078 * (435) 789-1017


CIMAREX ENERGY CO.

DAVINCI 7-18 FEDERAL COM
 13H, 12H, 11H, 10H, 9H, 8H, 7H & 6H
 LOT 7, SECTION 6, T25S, R27E, N.M.P.M.
 EDDY COUNTY, NEW MEXICO

SURVEYED BY	A.H., J.F.	10-17-16	SCALE
DRAWN BY	S.F.	10-24-16	1" = 80'

LOCATION LAYOUT EXHIBIT D

1" = 40'
 X-Section
 Scale
 1" = 100'

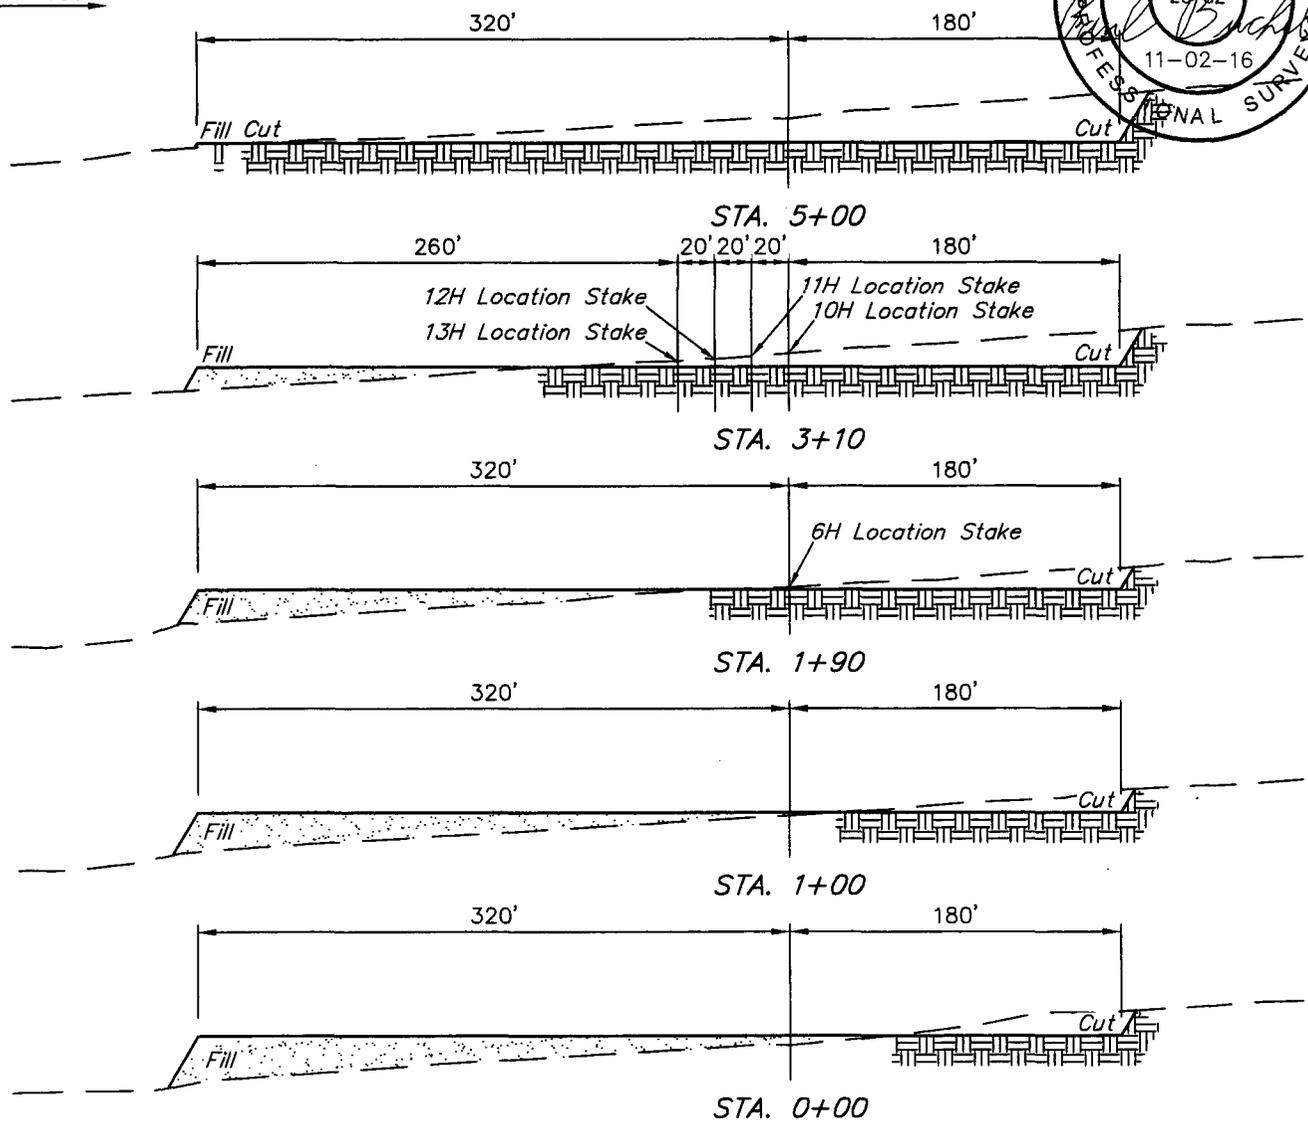

APPROXIMATE EARTHWORK QUANTITIES	
(3") TOPSOIL STRIPPING	2,470 Cu. Yds.
REMAINING LOCATION	17,800 Cu. Yds.
TOTAL CUT	20,270 Cu. Yds.
FILL	17,800 Cu. Yds.
EXCESS MATERIAL	2,470 Cu. Yds.
TOPSOIL	2,470 Cu. Yds.
EXCESS UNBALANCE (After Interim Rehabilitation)	0 Cu. Yds.

APPROXIMATE SURFACE DISTURBANCE AREAS		
	DISTANCE	ACRES
WELL SITE DISTURBANCE	NA	±6.400
30' WIDE ACCESS ROAD R-O-W DISTURBANCE	±331.57'	±0.228
30' WIDE PRODUCTION FLOW LINE R-O-W DISTURBANCE	±1,759.69'	±1.212
30' WIDE GAS LIFT FLOW LINE R-O-W DISTURBANCE	±1,774.50'	±1.222
TOTAL SURFACE USE AREA		±9.062

NOTES:

- Fill quantity includes 5% for compaction.
- Cut/Fill slopes 1 1/2:1 (Typ. except where noted)




UELS, LLC
 Corporate Office * 85 South 200 East
 Vernal, UT 84078 * (435) 789-1017

CIMAREX ENERGY CO.

DAVINCI 7-18 FEDERAL COM
 13H, 12H, 11H, 10H, 9H, 8H, 7H & 6H
 LOT 7, SECTION 6, T25S, R27E, N.M.P.M.
 EDDY COUNTY, NEW MEXICO

SURVEYED BY	A.H., J.F.	10-17-16	SCALE
DRAWN BY	S.F.	10-24-16	AS SHOWN
TYPICAL CROSS SECTIONS EXHIBIT D			

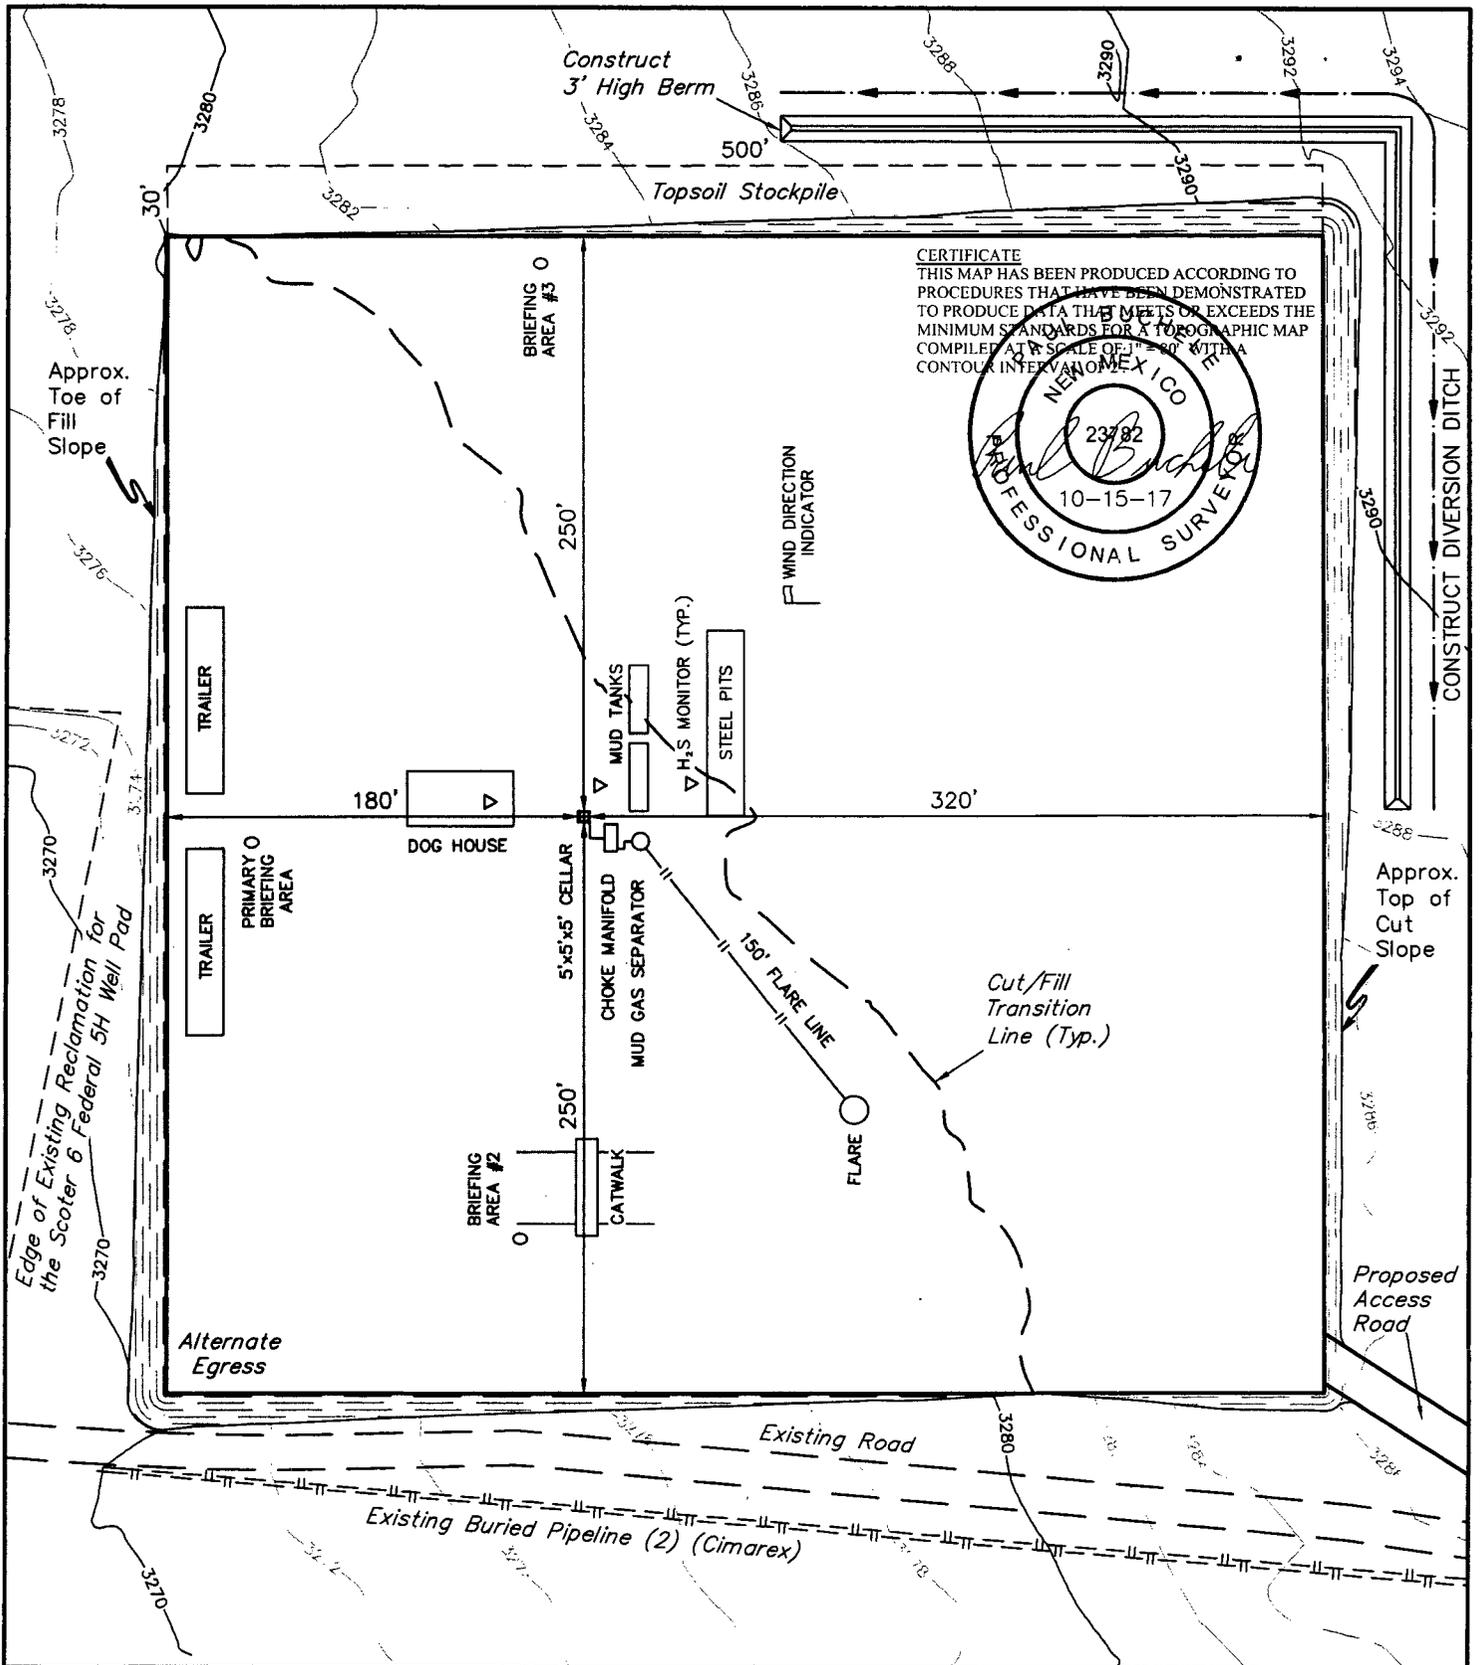

NOTES:

- Contours shown at 2' intervals.


CIMAREX ENERGY CO.

DAVINCI 7-18 FEDERAL COM 9H
 410' FSL 1050' FWL
 LOT 7, SECTION 6, T25S, R27E, N.M.P.M.
 EDDY COUNTY, NEW MEXICO

SURVEYED BY	A.H., J.F.	10-17-16	SCALE
DRAWN BY	S.F.	10-24-16	1" = 80'
TYPICAL RIG LAYOUT			EXHIBIT D





UELS, LLC
 Corporate Office * 85 South 200 East
 Vernal, UT 84078 * (435) 789-1017



LINE TABLE			LINE TABLE		
LINE	DIRECTION	LENGTH	LINE	DIRECTION	LENGTH
L1	N77°W	205'	L4	S05°W	251'
L2	S88°W	264'	L5	S04°W	249'
L3	S05°W	228'			

700' X 700' Archaeological Survey Boundary

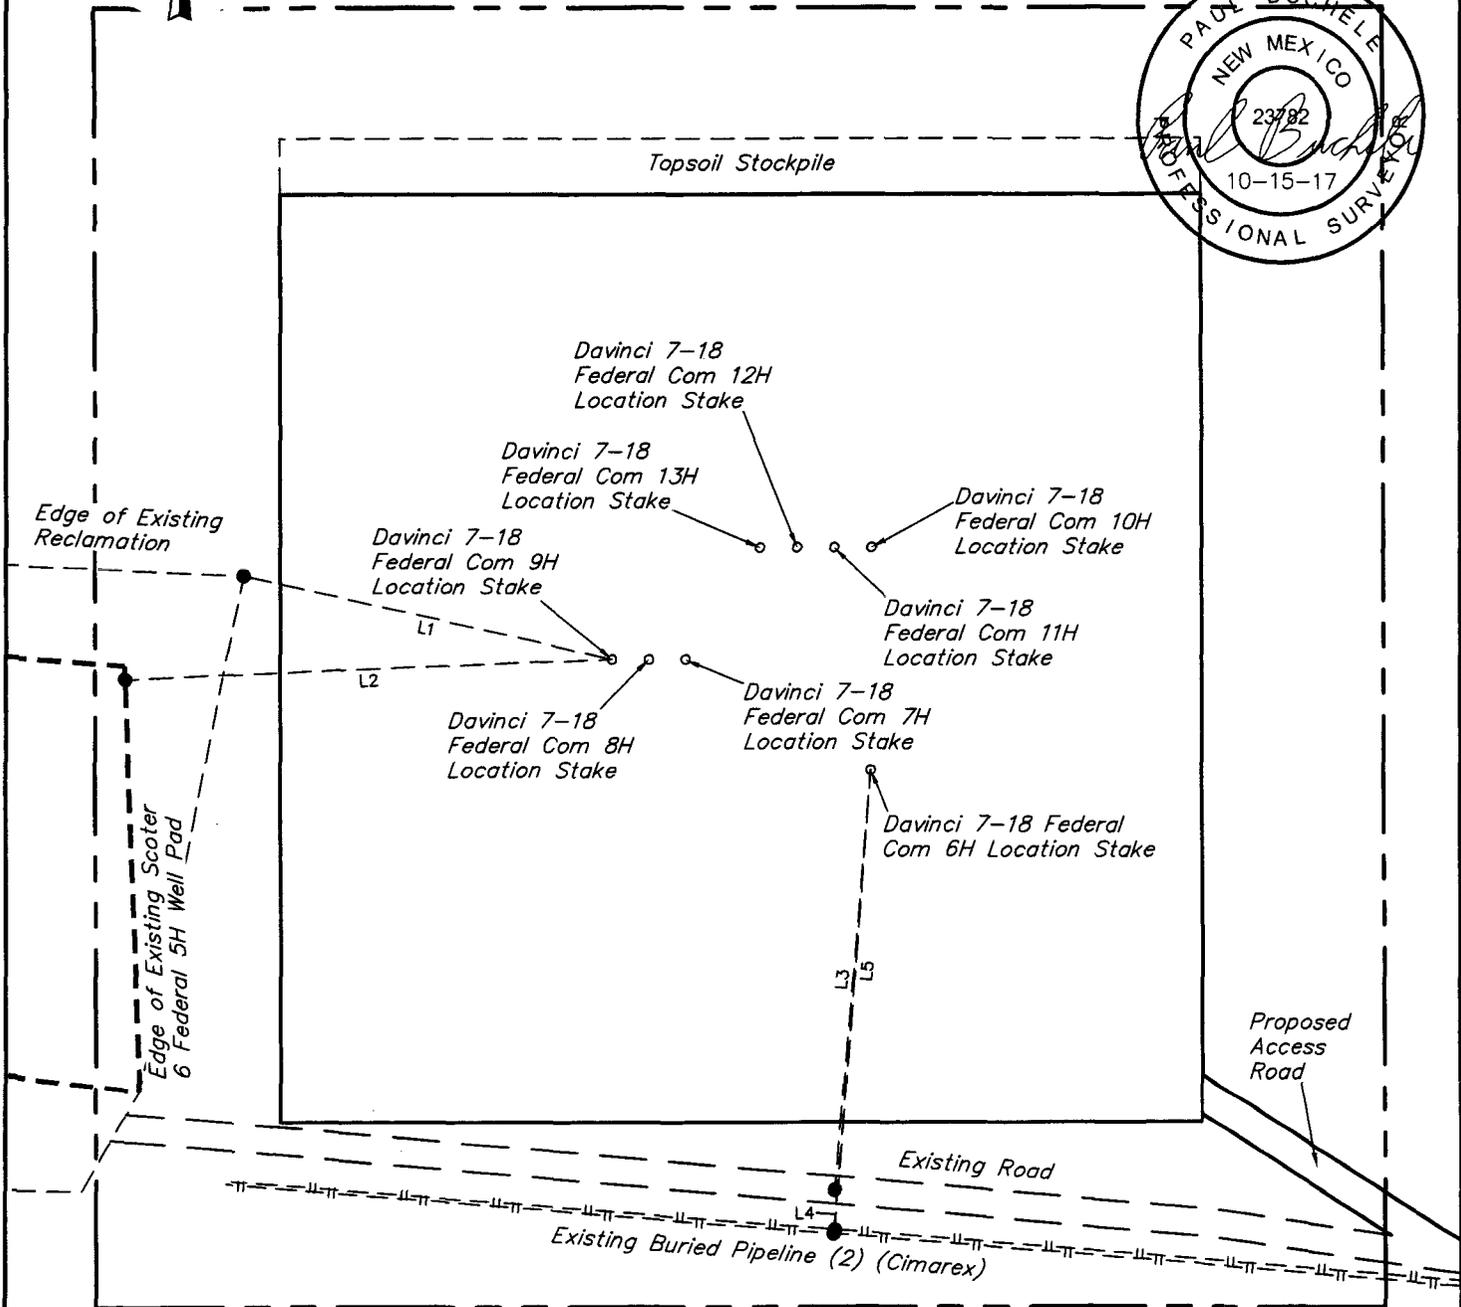

REV:1 10-15-17 C.D. (SHL CHANGE)

NOTES:


CIMAREX ENERGY CO.

**DAVINCI 7-18 FEDERAL COM
13H, 12H, 11H, 10H, 9H, 8H, 7H & 6H
LOT 7, SECTION 6, T25S, R27E, N.M.P.M.
EDDY COUNTY, NEW MEXICO**





UELS, LLC
Corporate Office * 85 South 200 East
Vernal, UT 84078 * (435) 789-1017

SURVEYED BY	A.H., J.F.	10-17-16	SCALE
DRAWN BY	S.F.	10-24-16	1" = 100'
ARCHAEOLOGICAL SURVEY BOUNDARY			EXHIBIT D

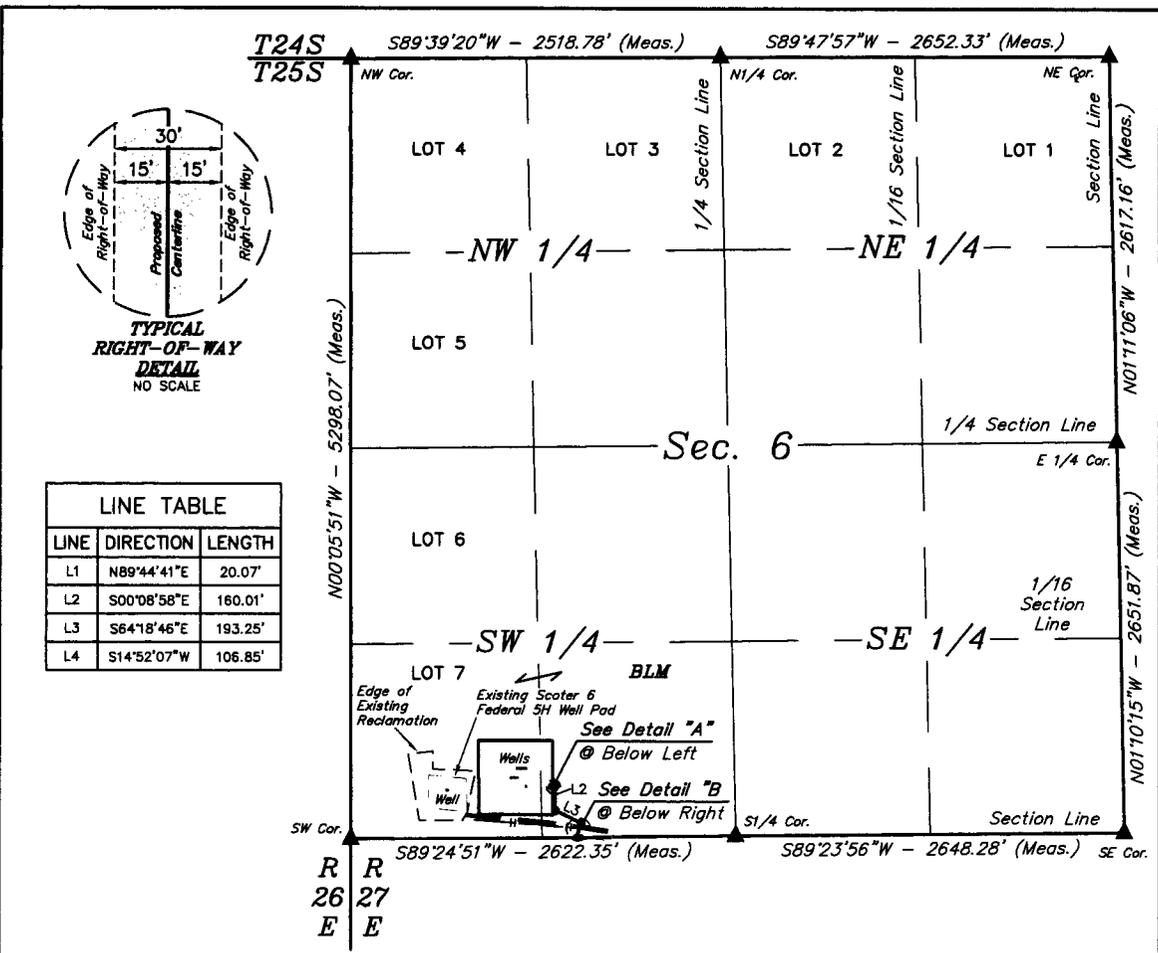

BEGINNING OF PROPOSED PRODUCTION FLOW LINE RIGHT-OF-WAY STA. 0+00
(At Edge of Proposed Davinci 7-18 Federal Com 13H, 12H, 11H, 10H, 9H, 8H, 7H & 6H Well Pad)

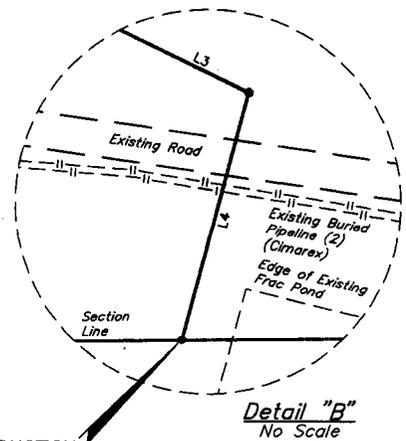

END OF PROPOSED PRODUCTION FLOW LINE RIGHT-OF-WAY ON BLM LANDS IN SEC. 6 STA. 4+80.18
(At Section Line)




ACREAGE / LENGTH TABLE

	OWNERSHIP	FEET	RODS	ACRES
(SW 1/4)	BLM	480.18	29.10	0.331

▲ = SECTION CORNERS LOCATED.

CERTIFICATE
THIS IS TO CERTIFY THAT THIS EASEMENT PLAT AND THE ACTUAL SURVEY ON THE GROUND UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY DIRECT SUPERVISION, THAT I AM RESPONSIBLE FOR THIS SURVEY, THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO, AND THAT IT IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.



FILE: 61136-A1

Sheet 1 of 2

NOTES:
• Basis of bearing is a G.P.S. observation (Vertical Control Datum: NAVD88)



UELS, LLC
Corporate Office * 85 South 200 East
Vernal, UT 84078 * (435) 789-1017



CIMAREX ENERGY CO.
DAVINCI 7-18 FEDERAL COM
13H, 12H, 11H, 10H, 9H, 8H, 7H & 6H
SECTION 6, T25S, R27E, N.M.P.M.
EDDY COUNTY, NEW MEXICO

SURVEYED BY	A.H., J.F.	10-17-16	SCALE
DRAWN BY	S.F.	10-24-16	1" = 1000'
PRODUCTION FLOW LINE R-O-W EXHIBIT G-1			

PRODUCTION FLOW LINE RIGHT-OF-WAY DESCRIPTION

A 30' WIDE RIGHT-OF-WAY 15' ON EACH SIDE OF THE FOLLOWING DESCRIBED CENTERLINE.

BEGINNING AT A POINT IN THE SE 1/4 SW 1/4 OF SECTION 6, T25S, R27E, N.M.P.M., WHICH BEARS N74°59'34"W 1297.05' FROM THE SOUTH 1/4 CORNER OF SAID SECTION 6, THENCE N89°44'41"E 20.07'; THENCE S00°08'58"E 160.01'; THENCE S64°18'46"E 193.25'; THENCE S14°52'07"W 106.85' TO A POINT ON THE SOUTH LINE OF THE SE 1/4 SW 1/4 OF SAID SECTION 6, WHICH BEARS S89°24'51"W 1085.65' FROM THE SOUTH 1/4 CORNER OF SAID SECTION 6. THE SIDE LINES OF SAID DESCRIBED RIGHT-OF-WAY BEING SHORTENED OR ELONGATED TO MEET THE GRANTOR'S PROPERTY LINES. BASIS OF BEARINGS IS A G.P.S. OBSERVATION. CONTAINS 0.331 ACRES MORE OR LESS.


BEGINNING OF PRODUCTION FLOW LINE STA. 0+00 BEARS N74°59'34"W 1297.05' FROM THE SOUTH 1/4 CORNER OF SECTION 6, T25S, R27E, N.M.P.M.

END OF PRODUCTION FLOW LINE ON BLM LANDS IN SEC. 6 STA. 4+80.18 BEARS S89°24'51"W 1085.65' FROM THE SOUTH 1/4 CORNER OF SECTION 6, T25S, R27E, N.M.P.M.

DAVINCI 7-18 FEDERAL COM 13H, 12H, 11H, 10H, 9H, 8H, 7H & 6H PRODUCTION FLOW LINE R-O-W			
SECTION CORNER	SECTION CORNER DESC.	LATITUDE (NAD 83)	LONGITUDE (NAD 83)
NW COR. SEC. 6, T25S, R27E	2.5" IRON PIPE WITH BRASS CAP	N 32°09'58.69"	W 104°14'16.85"
N1/4 COR. SEC. 6, T25S, R27E	1" IRON PIPE WITH BRASS CAP	N 32°09'58.84"	W 104°13'47.56"
NE COR. SEC. 6, T25S, R27E	1.5" IRON PIPE WITH BRASS CAP	N 32°09'58.93"	W 104°13'16.71"
E1/4 COR. SEC. 6, T25S, R27E	1/2" IRON PIPE WITH BRASS CAP	N 32°09'33.04"	W 104°13'16.08"
SE COR. SEC. 6, T25S, R27E	2" IRON PIPE WITH BRASS CAP	N 32°09'06.81"	W 104°13'15.46"
S1/4 COR. SEC. 6, T25S, R27E	1" IRON PIPE WITH BRASS CAP	N 32°09'06.54"	W 104°13'46.25"
SW COR. SEC. 6, T25S, R27E	2" IRON PIPE WITH CAP	N 32°09'06.27"	W 104°14'16.75"

DAVINCI 7-18 FEDERAL COM 13H, 12H, 11H, 10H, 9H, 8H, 7H & 6H PRODUCTION FLOW LINE R-O-W			
NUMBER	STATION	LATITUDE (NAD 83)	LONGITUDE (NAD 83)
BEGIN	0+00	N 32°09'09.86"	W 104°14'00.82"
1	0+20.07	N 32°09'09.86"	W 104°14'00.59"
2	1+80.08	N 32°09'08.28"	W 104°14'00.58"
3	3+73.33	N 32°09'07.45"	W 104°13'58.56"
END	4+80.18	N 32°09'06.43"	W 104°13'58.88"

CERTIFICATE
 THIS IS TO CERTIFY THAT THIS EASEMENT PLAT AND THE ACTUAL SURVEY OF THE GROUND UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY DIRECT SUPERVISION; THAT I AM RESPONSIBLE FOR THIS SURVEY; THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO; AND THAT IT IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.



FILE: 61136-A2

Sheet 2 of 2



UELS, LLC
 Corporate Office * 85 South 200 East
 Vernal, UT 84078 * (435) 789-1017




CIMAREX ENERGY CO.


DAVINCI 7-18 FEDERAL COM
 13H, 12H, 11H, 10H, 9H, 8H, 7H & 6H
 SECTION 6, T25S, R27E, N.M.P.M.
 EDDY COUNTY, NEW MEXICO

SURVEYED BY	A.H. J.F.	10-17-16	SCALE
DRAWN BY	S.F.	10-24-16	N/A



PRODUCTION FLOW LINE R-O-W EXHIBIT G-1



LINE TABLE		
LINE	DIRECTION	LENGTH
L5	S14°52'07"W	515.62'
L6	S75°24'09"E	383.89'
L7	S14°38'47"W	380.00'

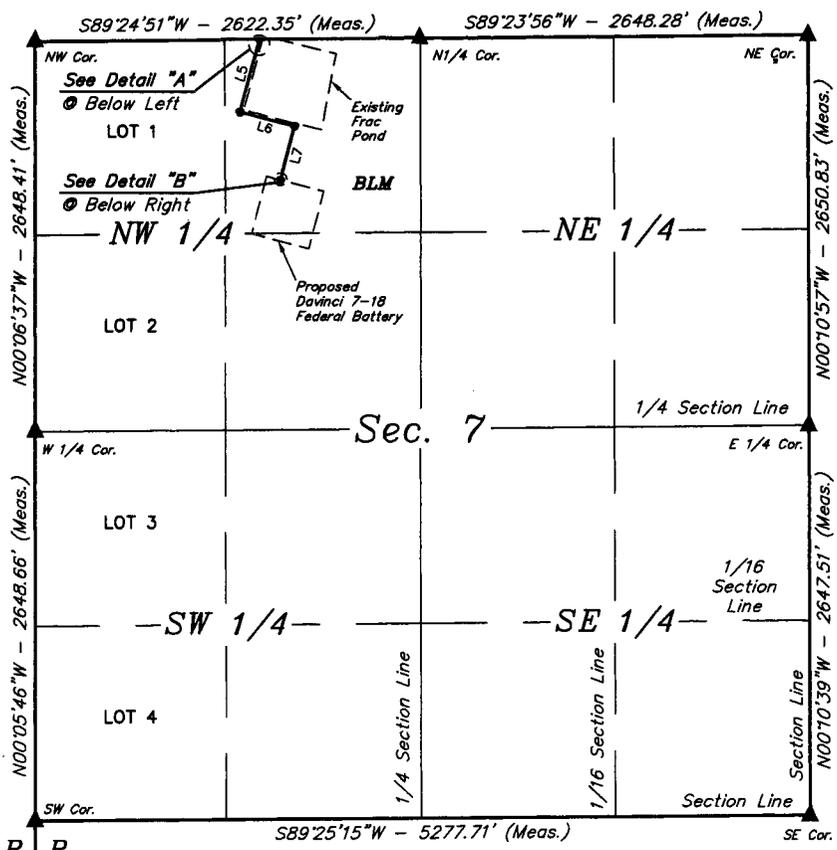


R R
 26 27
 E E
 BEGINNING OF PROPOSED
 PRODUCTION FLOW LINE
 RIGHT-OF-WAY ON BLM LANDS
 IN SEC. 7 STA. 4+80.18
 (At Section Line)

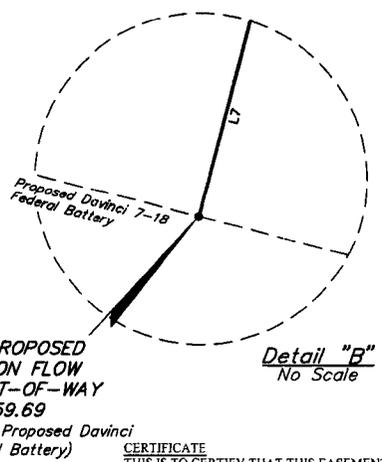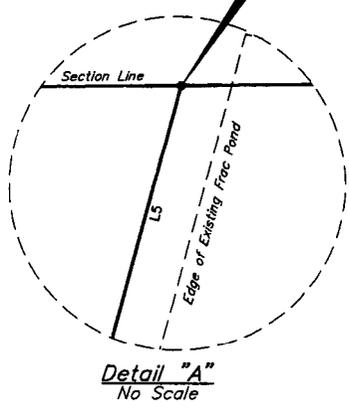

END OF PROPOSED
 PRODUCTION FLOW LINE
 RIGHT-OF-WAY
 STA. 17+59.69
 (At Edge of Proposed Davinci
 7-18 Federal Battery)

CERTIFICATE
 THIS IS TO CERTIFY THAT THIS EASEMENT PLAT AND
 THE ACTUAL SURVEY ON THE GROUND UPON WHICH IT
 IS BASED WERE PERFORMED BY ME OR UNDER MY
 DIRECT SUPERVISION THAT I AM RESPONSIBLE FOR
 THIS SURVEY, THAT THIS SURVEY MEETS THE
 MINIMUM STANDARDS FOR SURVEYING IN NEW
 MEXICO, AND THAT THE SAME ARE CORRECT TO THE
 BEST OF MY KNOWLEDGE AND BELIEF.



ACREAGE / LENGTH TABLE			
	OWNERSHIP	FEET	RODS ACRES
(NW 1/4)	BLM	1279.51	77.55 0.881

▲ = SECTION CORNERS LOCATED.

FILE: 61136-B1

Sheet 1 of 2

NOTES:
 • Basis of bearing is a G.P.S. observation (Vertical Control Datum: NAVD88)



CIMAREX ENERGY CO.
 DAVINCI 7-18 FEDERAL COM
 13H, 12H, 11H, 10H, 9H, 8H, 7H & 6H
 SECTION 7, T25S, R27E, N.M.P.M.
 EDDY COUNTY, NEW MEXICO

SURVEYED BY	A.H., J.F.	10-17-16	SCALE
DRAWN BY	S.F.	10-24-16	1" = 1000'
PRODUCTION FLOW LINE R-O-W EXHIBIT G-1			



UELS, LLC
 Corporate Office * 85 South 200 East
 Vernal, UT 84078 * (435) 789-1017

PRODUCTION FLOW LINE RIGHT-OF-WAY DESCRIPTION

A 30' WIDE RIGHT-OF-WAY 15' ON EACH SIDE OF THE FOLLOWING DESCRIBED CENTERLINE.

BEGINNING AT A POINT ON THE NORTH LINE OF THE NE 1/4 NW 1/4 OF SECTION 7, T25S, R27E, N.M.P.M., WHICH BEARS S89°24'51"W 1085.65' FROM THE NORTH 1/4 CORNER OF SAID SECTION 7, THENCE S14°52'07"W 515.62'; THENCE S75°24'09"E 383.89'; THENCE S14°38'47"W 380.00' TO A POINT IN THE NE 1/4 NW 1/4 OF SAID SECTION 7, WHICH BEARS S44°03'44"W 1355.24' FROM THE NORTH 1/4 CORNER OF SAID SECTION 7. THE SIDE LINES OF SAID DESCRIBED RIGHT-OF-WAY BEING SHORTENED OR ELONGATED TO MEET THE GRANTOR'S PROPERTY LINES. BASIS OF BEARINGS IS A G.P.S. OBSERVATION. CONTAINS 0.881 ACRES MORE OR LESS.


BEGINNING OF PRODUCTION FLOW LINE ON BLM LANDS IN SEC. 7 STA. 4+80.18 BEARS S89°24'51"W 1085.65' FROM THE NORTH 1/4 CORNER OF SECTION 7, T25S, R27E, N.M.P.M.

END OF PRODUCTION FLOW LINE STA. 17+59.69 BEARS S44°03'44"W 1355.24' FROM THE NORTH 1/4 CORNER OF SECTION 7, T25S, R27E, N.M.P.M.

DAVINCI 7-18 FEDERAL COM 13H, 12H, 11H, 10H, 9H, 8H, 7H & 6H PRODUCTION FLOW LINE R-O-W			
SECTION CORNER	SECTION CORNER DESC.	LATITUDE (NAD 83)	LONGITUDE (NAD 83)
NW COR. SEC. 7, T25S, R27E	2" IRON PIPE WITH BRASS CAP	N 32°09'06.27"	W 104°14'16.75"
N1/4 COR. SEC. 7, T25S, R27E	1" IRON PIPE WITH BRASS CAP	N 32°09'06.54"	W 104°13'46.25"
NE COR. SEC. 7, T25S, R27E	2" IRON PIPE WITH BRASS CAP	N 32°09'06.81"	W 104°13'15.46"
E1/4 COR. SEC. 7, T25S, R27E	1" IRON PIPE WITH BRASS CAP	N 32°08'40.58"	W 104°13'15.36"
SE COR. SEC. 7, T25S, R27E	2" IRON PIPE WITH BRASS CAP	N 32°08'14.39"	W 104°13'15.27"
SW COR. SEC. 7, T25S, R27E	2" IRON PIPE WITH CAP	N 32°08'13.86"	W 104°14'16.64"
W 1/4 COR. SEC. 7, T25S, R27E	1" IRON PIPE WITH CAP	N 32°08'40.07"	W 104°14'16.69"

DAVINCI 7-18 FEDERAL COM 13H, 12H, 11H, 10H, 9H, 8H, 7H & 6H PRODUCTION FLOW LINE R-O-W			
NUMBER	STATION	LATITUDE (NAD 83)	LONGITUDE (NAD 83)
BEGIN	4+80.18	N 32°09'06.43"	W 104°13'58.88"
1	9+95.80	N 32°09'01.50"	W 104°14'00.42"
2	13+79.69	N 32°09'00.54"	W 104°13'56.10"
END	17+59.69	N 32°08'56.90"	W 104°13'57.21"

CERTIFICATE
 THIS IS TO CERTIFY THAT THIS EASEMENT PLAT AND THE ACTUAL SURVEY OF THE GROUND UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY DIRECT SUPERVISION, THAT I AM RESPONSIBLE FOR THIS SURVEY, THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO, AND THAT IT IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.



FILE: 61136-B2

Sheet 2 of 2

N



CIMAREX ENERGY CO.

**DAVINCI 7-18 FEDERAL COM
 13H, 12H, 11H, 10H, 9H, 8H, 7H & 6H
 SECTION 7, T25S, R27E, N.M.P.M.
 EDDY COUNTY, NEW MEXICO**

SURVEYED BY	A.H., J.F.	10-17-16	SCALE
DRAWN BY	S.F.	10-24-16	N/A
PRODUCTION FLOW LINE R-O-W EXHIBIT G-1			





UELS, LLC
 Corporate Office * 85 South 200 East
 Vernal, UT 84078 * (435) 789-1017

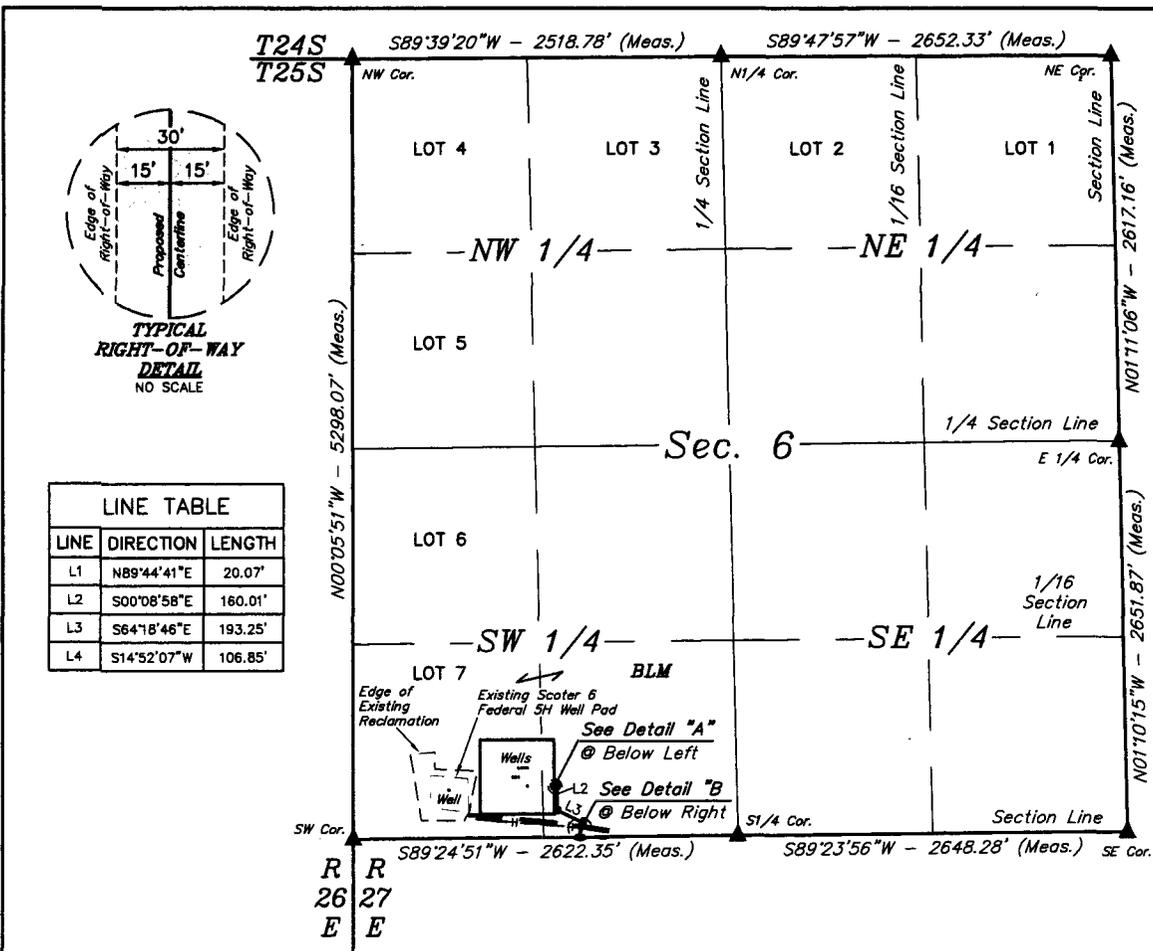



LINE TABLE		
LINE	DIRECTION	LENGTH
L1	N89°44'41\"E	20.07'
L2	S00°08'58\"E	160.01'
L3	S64°18'46\"E	193.25'
L4	S14°52'07\"W	106.85'

BEGINNING OF PROPOSED GAS LIFT FLOW LINE RIGHT-OF-WAY STA. 0+00
 (At Edge of Proposed Davinci 7-18 Federal Com 13H, 12H, 11H, 10H, 9H, 8H, 7H & 6H Well Pad)

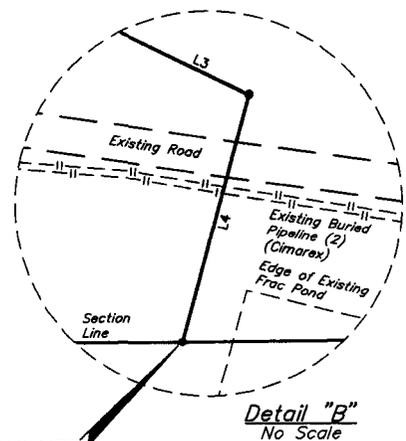

END OF PROPOSED GAS LIFT FLOW LINE RIGHT-OF-WAY ON BLM LANDS IN SEC. 6 STA. 4+80.18
 (At Section Line)

CERTIFICATE
 THIS IS TO CERTIFY THAT THIS EASEMENT PLAT AND THE ACTUAL SURVEY ON THE GROUND UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY DIRECT SUPERVISION, THAT I AM RESPONSIBLE FOR THIS SURVEY, THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO, AND THAT IT IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.



ACREAGE / LENGTH TABLE				
	OWNERSHIP	FEET	RODS	ACRES
(SW 1/4)	BLM	480.18	29.10	0.331

▲ = SECTION CORNERS LOCATED.

FILE: 61138-A1

Sheet 1 of 2

NOTES:
 • Basis of bearing is a G.P.S. observation (Vertical Control Datum: NAVD88)



UELS, LLC
 Corporate Office * 85 South 200 East
 Vernal, UT 84078 * (435) 789-1017



CIMAREX ENERGY CO.
 DAVINCI 7-18 FEDERAL COM
 13H, 12H, 11H, 10H, 9H, 8H, 7H & 6H
 SECTION 6, T25S, R27E, N.M.P.M.
 EDDY COUNTY, NEW MEXICO

SURVEYED BY	A.H., J.F.	10-17-16	SCALE
DRAWN BY	S.F.	10-24-16	1" = 1000'

GAS LIFT FLOW LINE R-O-W EXHIBIT G-1

GAS LIFT FLOW LINE RIGHT-OF-WAY DESCRIPTION

A 30' WIDE RIGHT-OF-WAY 15' ON EACH SIDE OF THE FOLLOWING DESCRIBED CENTERLINE.

BEGINNING AT A POINT IN THE SE 1/4 SW 1/4 OF SECTION 6, T25S, R27E, N.M.P.M., WHICH BEARS N74°59'34"W 1297.05' FROM THE SOUTH 1/4 CORNER OF SAID SECTION 6, THENCE N89°44'41"E 20.07'; THENCE S00°08'58"E 160.01'; THENCE S64°18'46"E 193.25'; THENCE S14°52'07"W 106.85' TO A POINT ON THE SOUTH LINE OF THE SE 1/4 SW 1/4 OF SAID SECTION 6, WHICH BEARS S89°24'51"W 1085.65' FROM THE SOUTH 1/4 CORNER OF SAID SECTION 6. THE SIDE LINES OF SAID DESCRIBED RIGHT-OF-WAY BEING SHORTENED OR ELONGATED TO MEET THE GRANTOR'S PROPERTY LINES. BASIS OF BEARINGS IS A G.P.S. OBSERVATION. CONTAINS 0.331 ACRES MORE OR LESS.


BEGINNING OF GAS LIFT FLOW LINE STA. 0+00
BEARS N74°59'34"W 1297.05' FROM THE SOUTH 1/4
CORNER OF SECTION 6, T25S, R27E, N.M.P.M.

END OF GAS LIFT FLOW LINE ON BLM LANDS IN
SEC. 6 STA. 4+80.18 BEARS S89°24'51"W 1085.65'
FROM THE SOUTH 1/4 CORNER OF SECTION 6,
T25S, R27E, N.M.P.M.

DAVINCI 7-18 FEDERAL COM 13H, 12H, 11H, 10H, 9H, 8H, 7H & 6H GAS LIFT FLOW LINE R-O-W			
SECTION CORNER	SECTION CORNER DESC.	LATITUDE (NAD 83)	LONGITUDE (NAD 83)
NW COR. SEC. 6, T25S, R27E	2.5" IRON PIPE WITH BRASS CAP	N 32°09'58.69"	W 104°14'16.85"
N1/4 COR. SEC. 6, T25S, R27E	1" IRON PIPE WITH BRASS CAP	N 32°09'58.84"	W 104°13'47.56"
NE COR. SEC. 6, T25S, R27E	1.5" IRON PIPE WITH BRASS CAP	N 32°09'58.93"	W 104°13'16.71"
E1/4 COR. SEC. 6, T25S, R27E	1/2" IRON PIPE WITH BRASS CAP	N 32°09'33.04"	W 104°13'16.08"
SE COR. SEC. 6, T25S, R27E	2" IRON PIPE WITH BRASS CAP	N 32°09'06.81"	W 104°13'15.46"
S1/4 COR. SEC. 6, T25S, R27E	1" IRON PIPE WITH BRASS CAP	N 32°09'06.54"	W 104°13'46.25"
SW COR. SEC. 6, T25S, R27E	2" IRON PIPE WITH CAP	N 32°09'06.27"	W 104°14'16.75"

DAVINCI 7-18 FEDERAL COM 13H, 12H, 11H, 10H, 9H, 8H, 7H & 6H GAS LIFT FLOW LINE R-O-W			
NUMBER	STATION	LATITUDE (NAD 83)	LONGITUDE (NAD 83)
BEGIN	0+00	N 32°09'09.86"	W 104°14'00.82"
1	0+20.07	N 32°09'09.86"	W 104°14'00.59"
2	1+80.08	N 32°09'08.28"	W 104°14'00.58"
3	3+73.33	N 32°09'07.45"	W 104°13'58.56"
END	4+80.18	N 32°09'06.43"	W 104°13'58.88"

CERTIFICATE
THIS IS TO CERTIFY THAT THIS EASEMENT PLAT AND THE ACTUAL SURVEY OF THE GROUND UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY DIRECT SUPERVISION; THAT I AM RESPONSIBLE FOR THIS SURVEY; THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO; AND THAT IT IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.



FILE: 61138-A2

Sheet 2 of 2




UELS, LLC
Corporate Office * 85 South 200 East
Vernal, UT 84078 * (435) 789-1017




CIMAREX ENERGY CO.

**DAVINCI 7-18 FEDERAL COM
13H, 12H, 11H, 10H, 9H, 8H, 7H & 6H
SECTION 6, T25S, R27E, N.M.P.M.
EDDY COUNTY, NEW MEXICO**

SURVEYED BY	A.H. J.F.	10-17-16	SCALE
DRAWN BY	S.E.	10-24-16	N/A
GAS LIFT FLOW LINE R-O-W EXHIBIT G-1			





LINE TABLE		
LINE	DIRECTION	LENGTH
L5	S14°52'07"W	515.62'
L6	S75°24'08"E	398.71'
L7	S14°35'56"W	379.99'

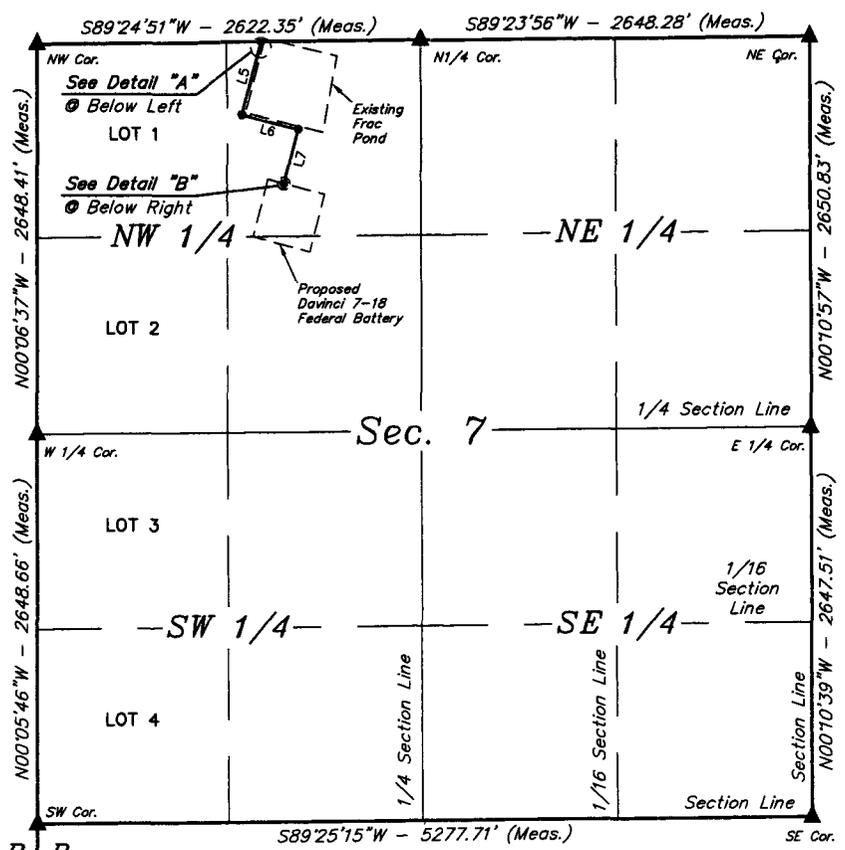



R
26
E R
27
E

BEGINNING OF PROPOSED GAS LIFT
FLOW LINE RIGHT-OF-WAY ON BLM
LANDS IN SEC. 7 STA. 4+80.18
(At Section Line)

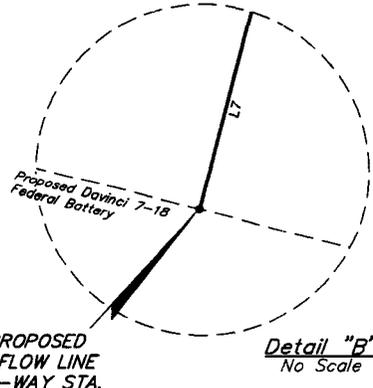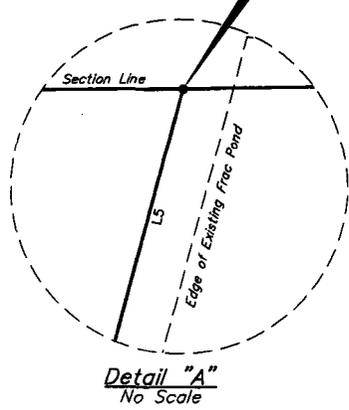

END OF PROPOSED
GAS LIFT FLOW LINE
RIGHT-OF-WAY STA.
17+74.50
(At Edge of Proposed Davinci
7-18 Federal Battery)

CERTIFICATE
THIS IS TO CERTIFY THAT THIS EASEMENT PLAT AND
THE ACTUAL SURVEY ON THE GROUND UPON WHICH IT
IS BASED WERE PERFORMED BY ME OR UNDER MY
DIRECT SUPERVISION; THAT I AM RESPONSIBLE FOR
THIS SURVEY; THAT THIS SURVEY MEETS THE
MINIMUM STANDARDS FOR SURVEYING IN NEW
MEXICO; AND THAT IT IS TRUE AND CORRECT TO THE
BEST OF MY KNOWLEDGE AND BELIEF.



ACREAGE / LENGTH TABLE				
	OWNERSHIP	FEET	RODS	ACRES
(NW 1/4)	BLM	1294.32	78.44	0.891

▲ = SECTION CORNERS LOCATED.

FILE: 61138-B1

Sheet 1 of 2

NOTES:
• Basis of bearing is a G.P.S. observation (Vertical Control Datum: NAVD88)



CIMAREX ENERGY CO.
DAVINCI 7-18 FEDERAL COM
13H, 12H, 11H, 10H, 9H, 8H, 7H & 6H
SECTION 7, T25S, R27E, N.M.P.M.
EDDY COUNTY, NEW MEXICO

SURVEYED BY	A.H., J.F.	10-17-16	SCALE
DRAWN BY	S.F.	10-24-16	1" = 1000'
GAS LIFT FLOW LINE R-O-W EXHIBIT G-1			



UELS, LLC
Corporate Office * 85 South 200 East
Vernal, UT 84078 * (435) 789-1017

GAS LIFT FLOW LINE RIGHT-OF-WAY DESCRIPTION

A 30' WIDE RIGHT-OF-WAY 15' ON EACH SIDE OF THE FOLLOWING DESCRIBED CENTERLINE.

BEGINNING AT A POINT ON THE NORTH LINE OF THE NE 1/4 NW 1/4 OF SECTION 7, T25S, R27E, N.M.P.M., WHICH BEARS S89°24'51"W 1085.65' FROM THE NORTH 1/4 CORNER OF SAID SECTION 7, THENCE S14°52'07"W 515.62'; THENCE S75°24'08"E 398.71'; THENCE S14°35'56"W 379.99' TO A POINT IN THE NE 1/4 NW 1/4 OF SAID SECTION 7, WHICH BEARS S43°30'09"W 1347.85' FROM THE NORTH 1/4 CORNER OF SAID SECTION 7. THE SIDE LINES OF SAID DESCRIBED RIGHT-OF-WAY BEING SHORTENED OR ELONGATED TO MEET THE GRANTOR'S PROPERTY LINES. BASIS OF BEARINGS IS A G.P.S. OBSERVATION. CONTAINS 0.891 ACRES MORE OR LESS.


BEGINNING OF GAS LIFT FLOW LINE ON BLM LANDS IN SEC. 7 STA. 4+80.18 BEARS S89°24'51"W 1085.65' FROM THE NORTH 1/4 CORNER OF SECTION 7, T25S, R27E, N.M.P.M.

END OF GAS LIFT FLOW LINE STA. 17+74.50 BEARS S43°30'09"W 1347.85' FROM THE NORTH 1/4 CORNER OF SECTION 7, T25S, R27E, N.M.P.M.

DAVINCI 7-18 FEDERAL COM 13H, 12H, 11H, 10H, 9H, 8H, 7H & 6H GAS LIFT FLOW LINE R-O-W			
SECTION CORNER	SECTION CORNER DESC.	LATITUDE (NAD 83)	LONGITUDE (NAD 83)
NW COR. SEC. 7, T25S, R27E	2" IRON PIPE WITH BRASS CAP	N 32°09'06.27"	W 104°14'16.75"
N1/4 COR. SEC. 7, T25S, R27E	1" IRON PIPE WITH BRASS CAP	N 32°09'06.54"	W 104°13'46.25"
NE COR. SEC. 7, T25S, R27E	2" IRON PIPE WITH BRASS CAP	N 32°09'06.81"	W 104°13'15.46"
E1/4 COR. SEC. 7, T25S, R27E	1" IRON PIPE WITH BRASS CAP	N 32°08'40.58"	W 104°13'15.36"
SE COR. SEC. 7, T25S, R27E	2" IRON PIPE WITH BRASS CAP	N 32°08'14.39"	W 104°13'15.27"
SW COR. SEC. 7, T25S, R27E	2" IRON PIPE WITH CAP	N 32°08'13.86"	W 104°14'16.64"
W 1/4 COR. SEC. 7, T25S, R27E	1" IRON PIPE WITH CAP	N 32°08'40.07"	W 104°14'16.69"

DAVINCI 7-18 FEDERAL COM 13H, 12H, 11H, 10H, 9H, 8H, 7H & 6H GAS LIFT FLOW LINE R-O-W			
NUMBER	STATION	LATITUDE (NAD 83)	LONGITUDE (NAD 83)
BEGIN	4+80.18	N 32°09'06.43"	W 104°13'58.88"
1	9+95.80	N 32°09'01.50"	W 104°14'00.42"
2	13+94.51	N 32°09'00.50"	W 104°13'55.93"
END	17+74.50	N 32°08'56.86"	W 104°13'57.04"

CERTIFICATE
THIS IS TO CERTIFY THAT THIS EASEMENT PLAT AND THE ACTUAL SURVEY ON THE GROUND UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY DIRECT SUPERVISION; THAT I AM RESPONSIBLE FOR THIS SURVEY; THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO; AND THAT IT IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.



FILE: 61138-B2

Sheet 2 of 2



CIMAREX ENERGY CO.


DAVINCI 7-18 FEDERAL COM
13H, 12H, 11H, 10H, 9H, 8H, 7H & 6H
SECTION 7, T25S, R27E, N.M.P.M.
EDDY COUNTY, NEW MEXICO

SURVEYED BY	A.H., J.F.	10-17-16	SCALE
DRAWN BY	S.F.	10-24-16	N/A

GAS LIFT FLOW LINE R-O-W EXHIBIT G-1



UELS, LLC
Corporate Office * 85 South 200 East
Vernal, UT 84078 * (435) 789-1017

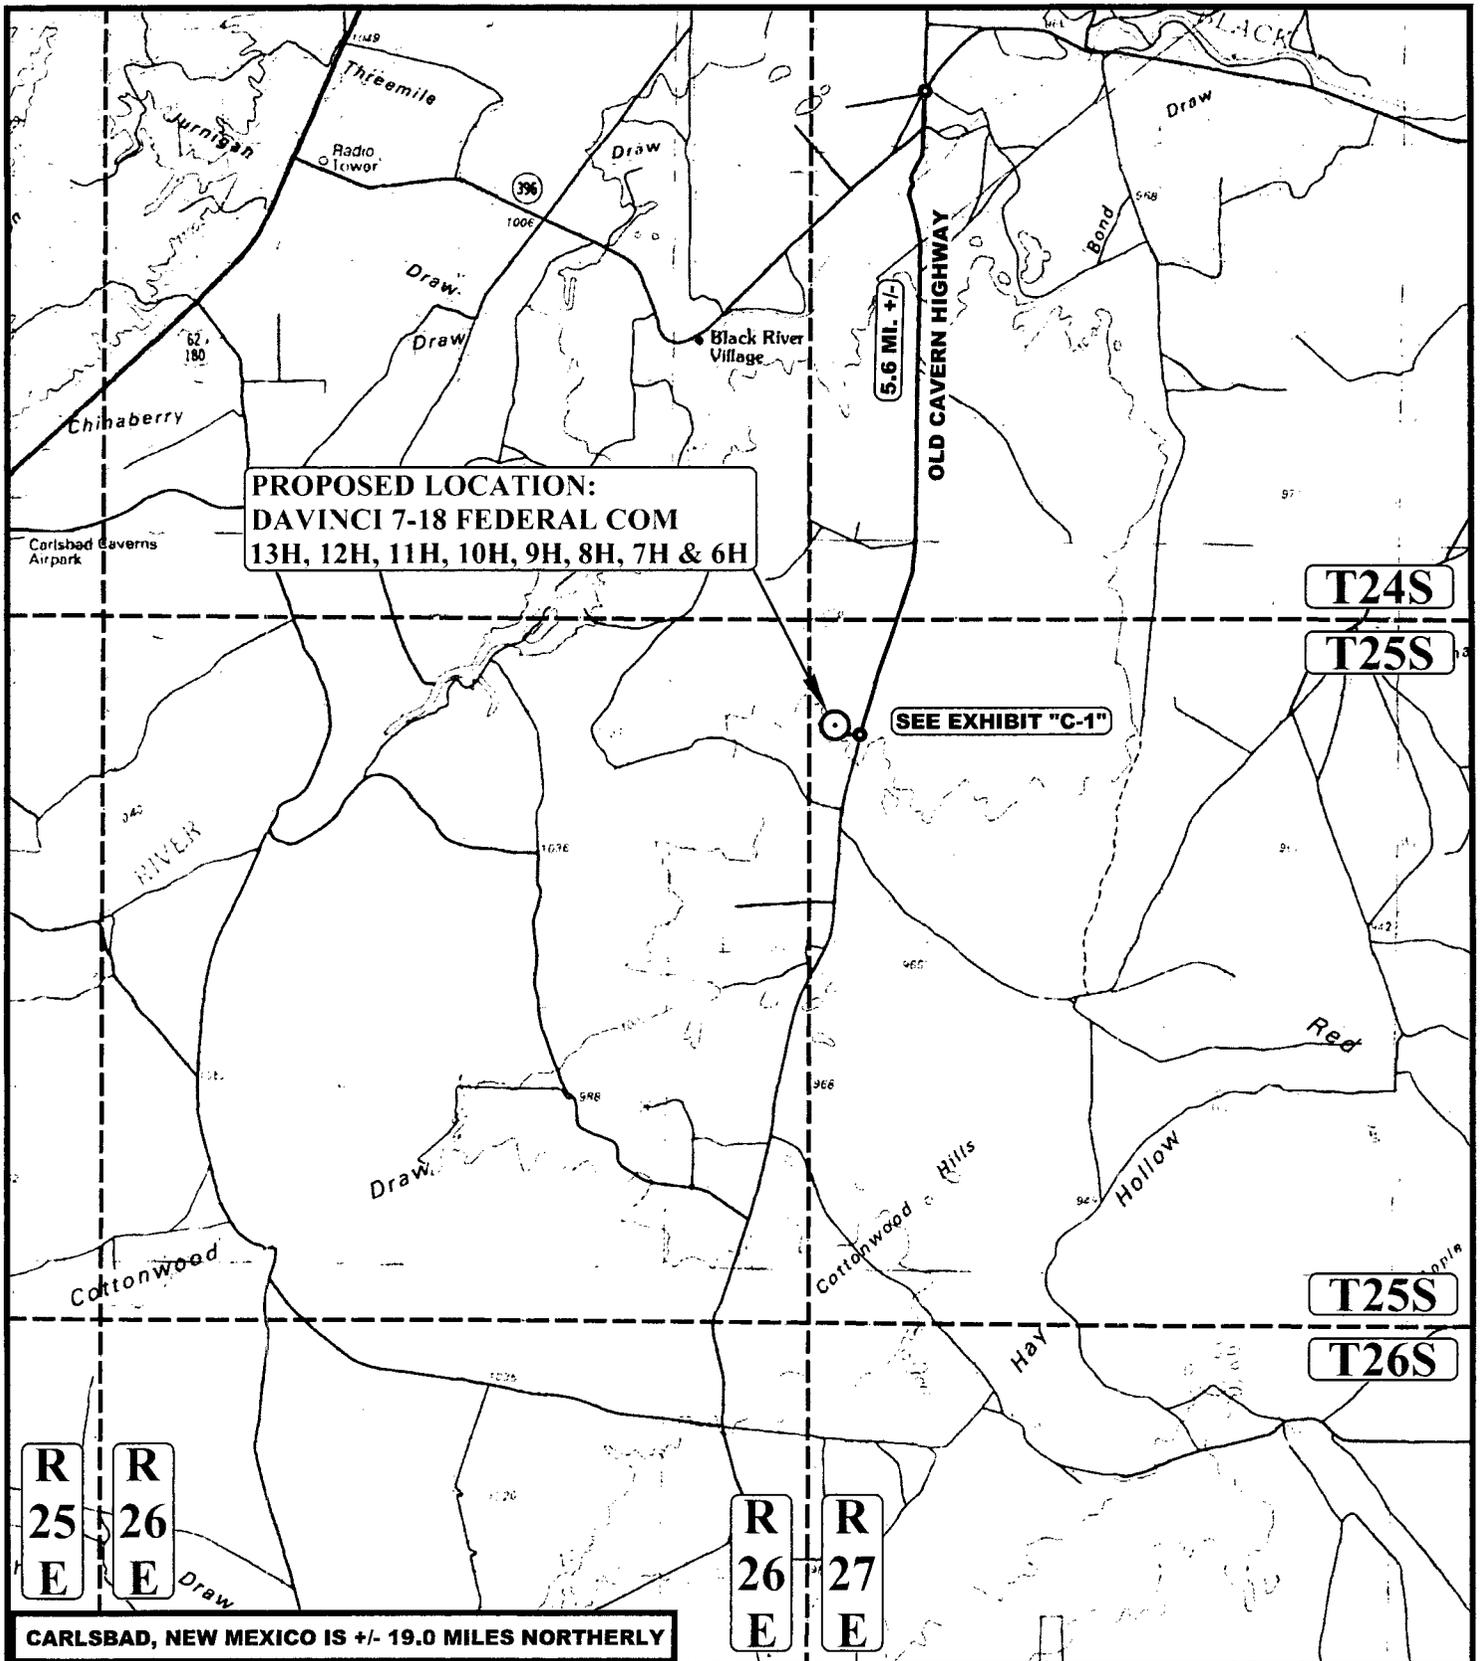

**PROPOSED LOCATION:
DAVINCI 7-18 FEDERAL COM
13H, 12H, 11H, 10H, 9H, 8H, 7H & 6H**

SEE EXHIBIT "C-1"

T24S

T25S

T25S

T26S

**R
25
E**

**R
26
E**

**R
26
E**

**R
27
E**

CARLSBAD, NEW MEXICO IS +/- 19.0 MILES NORTHERLY

LEGEND:

⊙ PROPOSED LOCATION




CIMAREX ENERGY CO.

**DAVINCI 7-18 FEDERAL COM
13H, 12H, 11H, 10H, 9H, 8H, 7H & 6H
LOT 7, SECTION 6, T25S, R27E, N.M.P.M.
EDDY COUNTY, NEW MEXICO**



UELS, LLC
Corporate Office * 85 South 200 East
Vernal, UT 84078 * (435) 789-1017

SURVEYED BY	A.H., J.F.	10-17-16	SCALE
DRAWN BY	T.J.	10-28-16	1 : 100,000
PUBLIC ACCESS ROAD MAP EXHIBIT B			

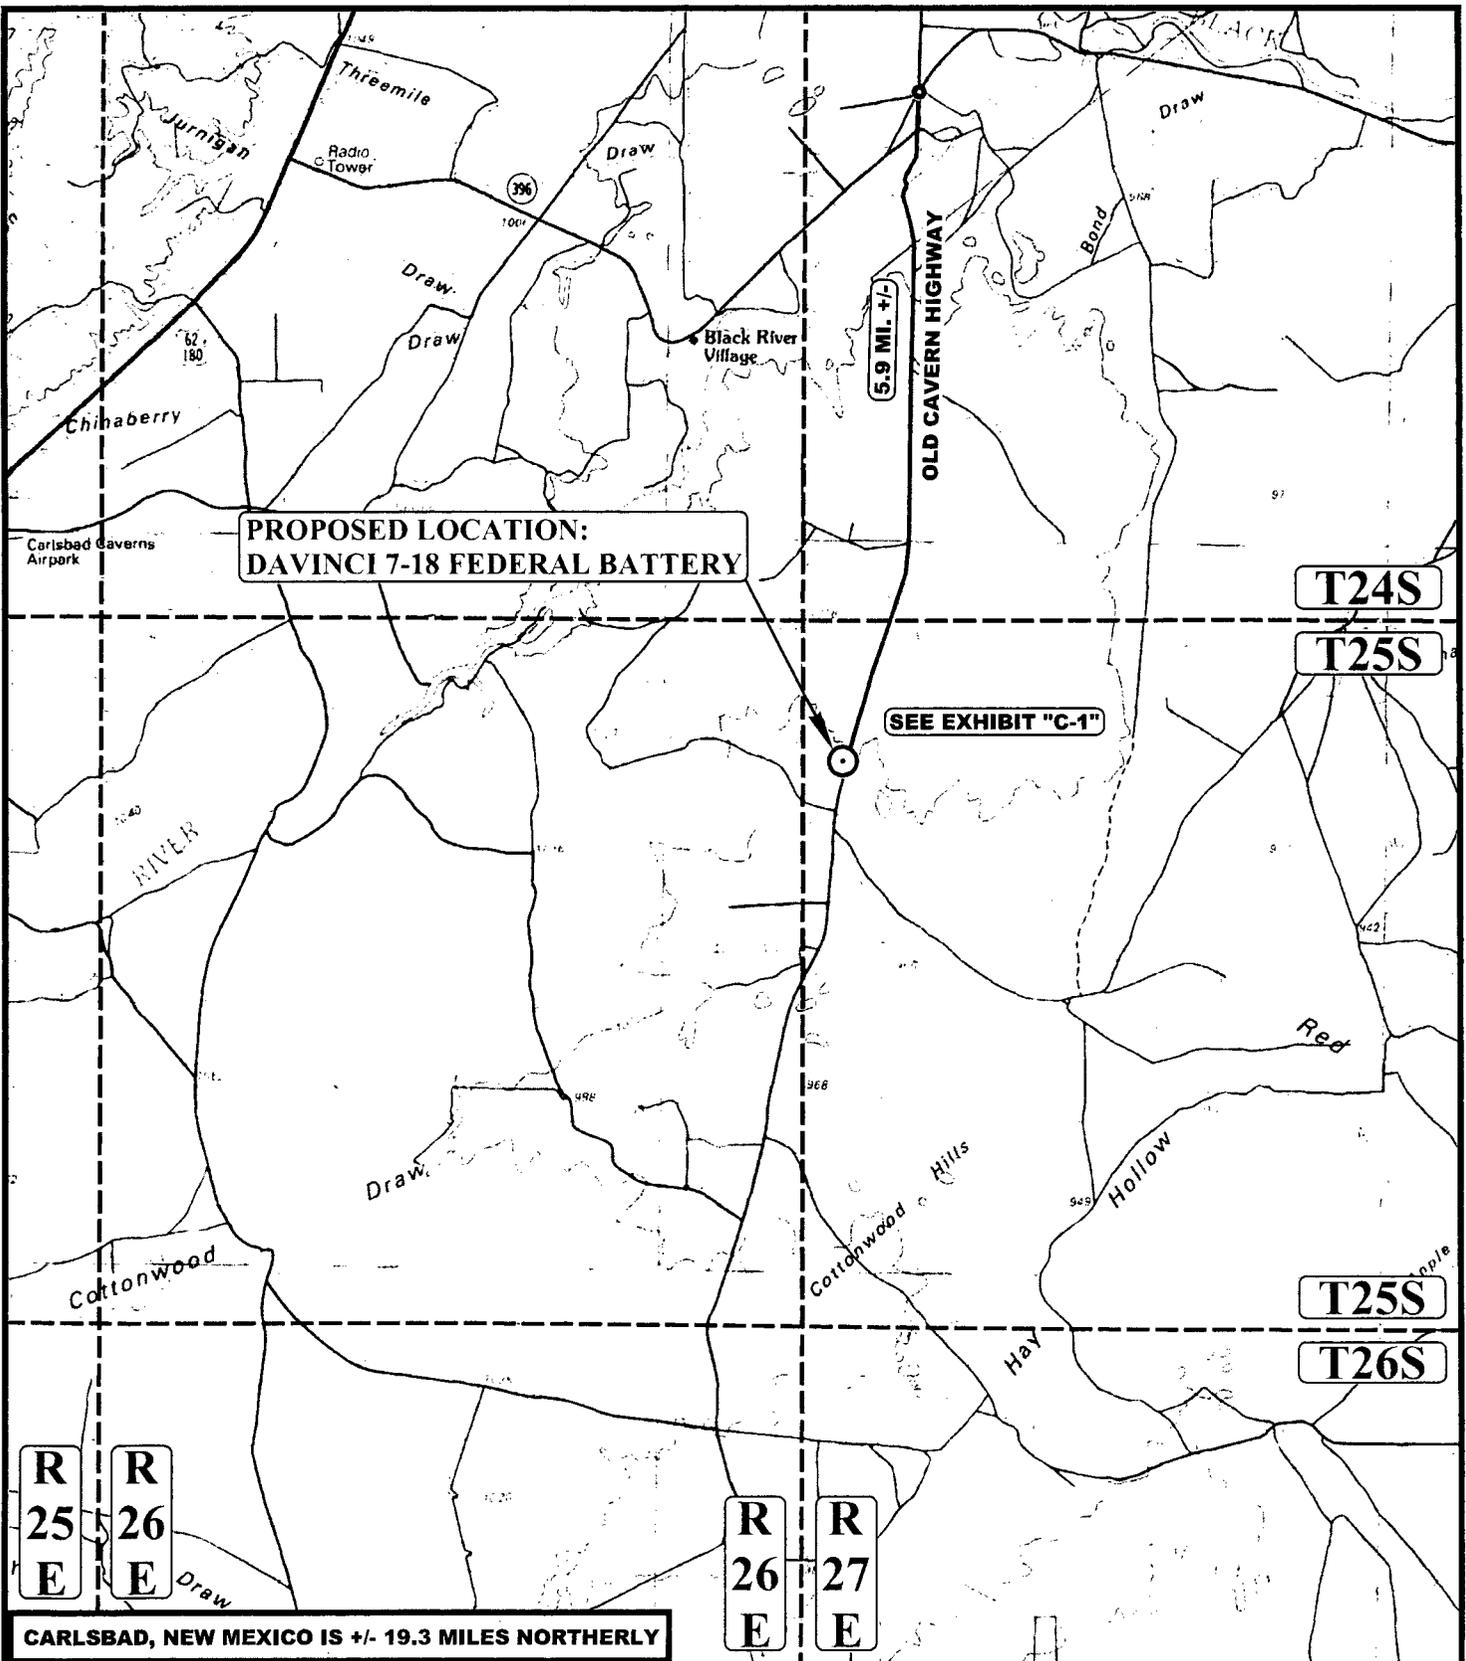

**PROPOSED LOCATION:
DAVINCI 7-18 FEDERAL BATTERY**

SEE EXHIBIT "C-1"

CARLSBAD, NEW MEXICO IS +/- 19.3 MILES NORTHERLY

LEGEND:
 **PROPOSED LOCATION**



UELS, LLC
 Corporate Office * 85 South 200 East
 Vernal, UT 84078 * (435) 789-1017



CIMAREX ENERGY CO.

DAVINCI 7-18 FEDERAL BATTERY
 E 1/2 NW 1/4, SECTION 7, T25S, R27E, N.M.P.M.
 EDDY COUNTY, NEW MEXICO

SURVEYED BY	A.H., J.F.	10-17-16	SCALE
DRAWN BY	T.L.	10-28-16	1 : 100,000

PUBLIC ACCESS ROAD MAP EXHIBIT B

BEGINNING AT THE INTERSECTION OF BLACK RIVER VILLAGE ROAD AND OLD CAVERN HIGHWAY TO THE SOUTH (LOCATED IN THE SW 1/4 OF SECTION 8, T24S, R27E, N.M.P.M.), PROCEED IN A SOUTHERLY, THEN SOUTHWESTERLY DIRECTION APPROXIMATELY 5.9 MILES TO THE BEGINNING OF THE PROPOSED ACCESS TO THE NORTHWEST; FOLLOW ROAD FLAGS IN A NORTHWESTERLY DIRECTION APPROXIMATELY 50' TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM THE INTERSECTION OF BLACK RIVER VILLAGE ROAD AND OLD CAVERN HIGHWAY (LOCATED IN THE SW 1/4 OF SECTION 8, T24S, R27E, N.M.P.M.) TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 5.9 MILES.

CIMAREX ENERGY CO.

**DAVINCI 7-18 FEDERAL BATTERY
E 1/2 NW 1/4, SECTION 7, T25S, R27E, N.M.P.M.
EDDY COUNTY, NEW MEXICO**



UELS, LLC
Corporate Office * 85 South 200 East
Vernal, UT 84078 * (435) 789-1017

SURVEYED BY	A.H., J.F.	10-17-16	
DRAWN BY	T.J.	10-28-16	
ROAD DESCRIPTION			Exhibit A

BEGINNING AT THE INTERSECTION OF BLACK RIVER VILLAGE ROAD AND OLD CAVERN HIGHWAY (LOCATED IN THE SW 1/4 OF SECTION 8, T24S, R27E, N.M.P.M.), PROCEED IN A SOUTHERLY, THEN SOUTHWESTERLY DIRECTION APPROXIMATELY 5.6 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE WEST; TURN RIGHT AND PROCEED IN A WESTERLY DIRECTION APPROXIMATELY 0.2 MILES TO THE BEGINNING OF THE PROPOSED ACCESS TO THE NORTHWEST; FOLLOW ROAD FLAGS IN A NORTHWESTERLY DIRECTION APPROXIMATELY 148' TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM THE INTERSECTION OF BLACK RIVER VILLAGE ROAD AND OLD CAVERN HIGHWAY (LOCATED IN THE SW 1/4 OF SECTION 8, T24S, R27E, N.M.P.M.) TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 5.8 MILES.

CIMAREX ENERGY CO.

**DAVINCI 7-18 FEDERAL COM
13H, 12H, 11H, 10H, 9H, 8H, 7H & 6H
LOT 7, SECTION 6, T25S, R27E, N.M.P.M.
EDDY COUNTY, NEW MEXICO**

SURVEYED BY	A.H., J.F.	10-17-16	
DRAWN BY	T.L.	10-28-16	
ROAD DESCRIPTION			



UELS, LLC
Corporate Office * 85 South 200 East
Vernal, UT 84078 * (435) 789-1017

Cimarex Davinci 7-18 Federal Com 9H

Surface Use Plan

Upon approval of the Application for Permit to Drill (APD) the following surface use plan of operations will be followed and carried out. The surface use plan outlines the proposed surface disturbance. If any other disturbance is needed after the APD is approved, a BLM sundry notice or right of way application will be submitted for approval prior to any additional surface disturbance.

Existing Roads

- Directions to location - Exhibit A.
- Public access route - Exhibit B.
- Existing access road for the proposed project. Please see Exhibit B and C.
- Cimarex Energy will:
 - Improve and/or maintain existing road(s) condition the same as or better than before the operations began.
 - Provide plans for improvement and /or maintenance of existing roads if requested.
 - Repair or replace damaged or deteriorated structures as needed. Including cattle guards and culverts.
 - Prevent and abate fugitive dust as needed, whether created by vehicular traffic, equipment operations, or other events.
 - Obtain written BLM approval prior to the application of surfactants, binding agents, or other dust suppression chemicals on the roadways.
- The maximum width of the driving surface will be 18'. The road will be crowned and ditched with a 2% slope from the tip of the crown to the edge of the driving surface. The ditches will be 1' deep with 3:1 slopes. The driving surface will be made of 6" rolled and compacted caliche.

New or Reconstructed Access Roads

No new roads are proposed for this project.

Well Radius Map

Please see Exhibit E for wells within one mile or proposed well SHL and BHL.

Proposed or Existing Production Facility

An existing battery will be utilized for the project if the well is productive.

- Davinci 7-18 Federal
 - Battery Pad diagram - Exhibit F
 - Battery will not require an expansion in order to accommodate additional production equipment for the project.
 - Battery Pad location previously approved
 - APD: Davinci 7-18 Federal Com 6H.

Gas Pipeline Specifications

- No new gas pipelines are required for this project.

Salt Water Disposal Specifications

- No new SWD pipelines are required for this project.

Power Lines

- No new power line is required for this project.

Well Site Location

- An existing well pad will be used to drill the proposed well.
 - Wells drilled or to be drilled: Davinci 7-18 Federal Com 6H-13H.
- Well pad will not require expansion in order to accommodate additional drilling wells.
- Well pad previously approved. APD: Davinci 7-18 Federal Com 6H.

Flowlines and Gas Lift Pipelines

- Flowlines
 - Cimarex Energy plans to construct off-lease flowlines to service the well.
 - Flowline will be buried and require a construction width of 30'.
 - 6" HP steel for oil, gas, and water production.
 - Length: 1,760'.
 - MAOP: 1,500 psi; Anticipated working pressure: 200-300 psi.
 - Please see Exhibit M for proposed on lease route.
 - A ROW application will be amended to the BLM for the proposed route.

Cimarex Davinci 7-18 Federal Com 9H Surface Use Plan

- Gas Lift Pipeline
 - Cimarex Energy plans to construct off-lease gas lift pipelines to service the well.
 - Gas pipeline will be buried and require a construction width of 30'.
 - 6" HP steel for gas lift.
 - Length: 1,775'.
 - MAOP: 1,500 psi; Anticipated working pressure: 200-300 psi.
 - Please see Exhibit N for proposed on lease route.
 - A ROW application will be amended to the BLM for the proposed route.

Water Resources

- A temporary surface fresh water pipeline(s) will be utilized for this project.
- Cimarex plans to lay the fresh water surface pipeline(s) prior to commencement of the stimulation job.
- 10" lay-flat surface pipeline.
- The surface pipeline(s) will follow the road from a frac pit to the well.
- Length: 1,760'.
- Operating pressure: <140 psi.
- Fresh water will be purchased from a 3rd party.
- Please see Exhibit O for proposed route.

Methods of Handling Waste

- Drilling fluids, produced oil, and water from the well during drilling and completion operations will be stored safely and disposed of properly in a NMOCD approved disposal facility.
- Garbage and trash produced during drilling and completion operations will be collected in a trash container and disposed of properly at a state approved disposal facility. All trash on and around well site will be collected for disposal.
- Human waste and grey water will be contained and disposed of properly at a state approved disposal site.
- After drilling and completion operations, trash, chemicals, salts, frac sand and other waste will be removed and disposed of properly at a state approved disposal site.
- The well will be drilled utilizing a closed loop system. Drill cuttings will be properly disposed of into steel tanks and taken to an NMOCD approved disposal facility.

Ancillary Facilities

No camps or airstrips to be constructed.

Interim and Final Reclamation

- Rehabilitation of the location will start in a timely manner after all proposed drilling wells have been drilled from the pad or if drilling operations have ceased as outlined below:
 - No approved or pending drill permits for wells located on the drill pad
 - No drilling activity for 5 years from the drill pad
- Surfacing materials will be removed and returned to a mineral pit or recycled to repair or build roads and well pads.
- Drainage systems, if any, will be reshaped to the original configuration with provisions made to alleviate erosion. These may need to be modified in certain circumstances to prevent inundation of the location's pad and surface facilities. After the area has been shaped and contoured, topsoil from the spoil pile will be placed over the disturbed area to the extent possible. Revegetation procedures will comply with BLM standards.
- Exhibit P illustrates the proposed Surface Reclamation plans after cessation of drilling operations as outlined above.
 - The areas of the location not essential to production facilities and operations will be reclaimed and seeded per BLM requirements.
- Operator will amend the surface reclamation plan if well is a dry hole and/or a single well pad.

Surface Ownership

- The wellsite is on surface owned by BLM.
- A copy of Surface Use Agreement has been given to the surface owner.
- The land is used mainly for farming, cattle ranching, recreational use, and oil and gas production.

Cultural Resource Survey - Archeology

- Cultural Resources Survey will be conducted for the entire project as proposed in the APD and submitted to the BLM for review and approval.

On Site Notes and Information

**Cimarex Davinci 7-18 Federal Com 9H
Surface Use Plan**

Onsite Date: 10/6/2016


BLM Personnel on site: Jeff Robertson, Robert Gomez, Brittany Chavez

Cimarex Energy personnel on site: Barry Hunt

Pertinent information from onsite:

Top Soil North. No Interim Reclamation. No V-door or Frac pad designations. Construct a ditch and berm system on northeast corner of pad to divert water run-off from pad. Access road and gas lift/production line from southeast corner, southeast to lease road and to off site battery.

DaVinci 7-18 Federal Com 6H water route, from Cimarex DaVinci Frac Pit (Sec. 8-25S-27E) Eddy County, NM to the DaVinci 7-18 well pad in Sec. 7-25S-27E.

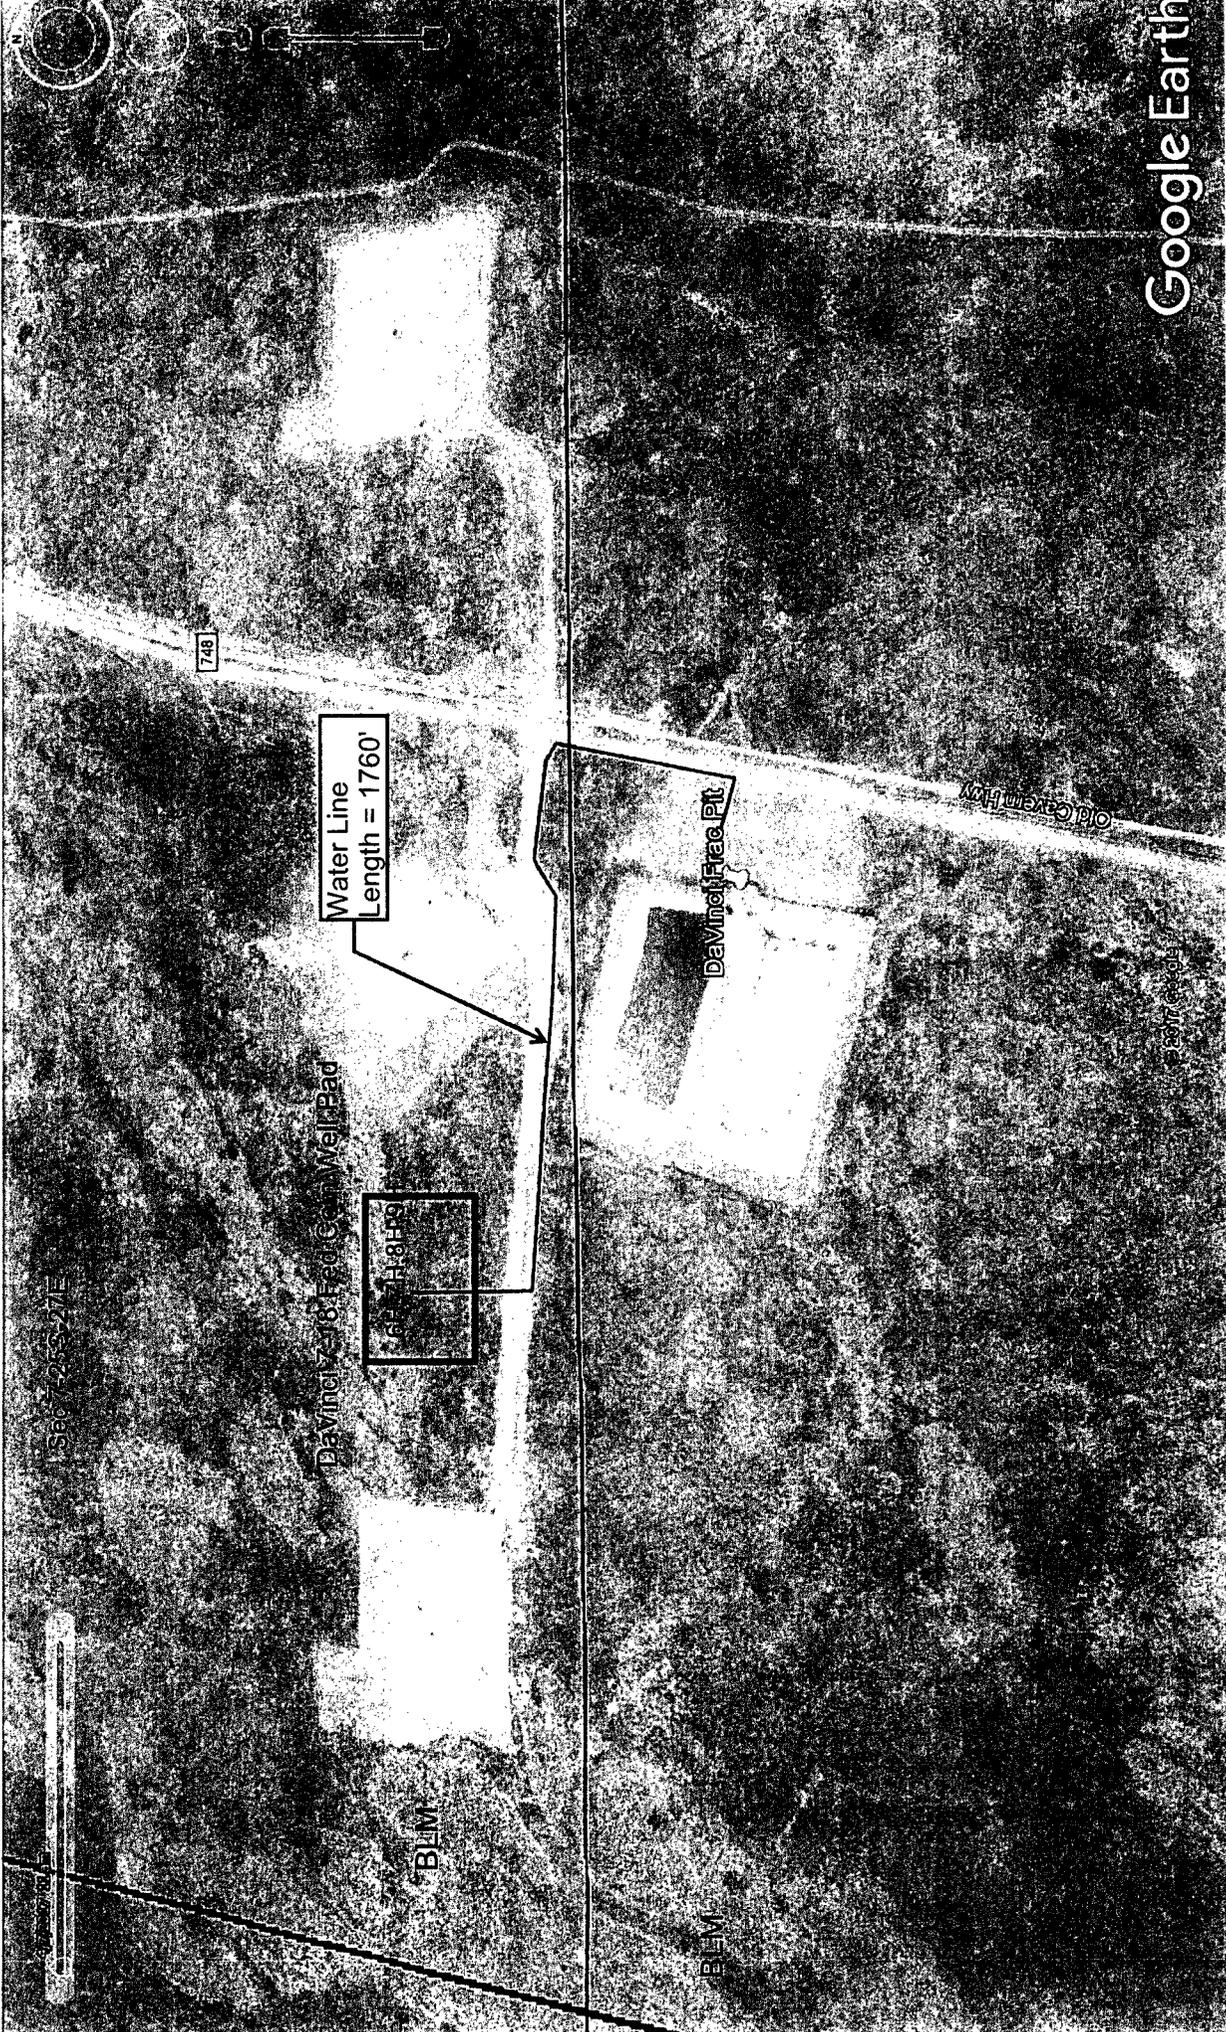

— 10" water line

Section 1 - General

Would you like to address long-term produced water disposal? NO

Section 2 - Lined Pits

Would you like to utilize Lined Pit PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Lined pit PWD on or off channel:

Lined pit PWD discharge volume (bbl/day):

Lined pit specifications:

Pit liner description:

Pit liner manufacturers information:

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal permit:

Lined pit precipitated solids disposal schedule:

Lined pit precipitated solids disposal schedule attachment:

Lined pit reclamation description:

Lined pit reclamation attachment:

Leak detection system description:

Leak detection system attachment:

Lined pit Monitor description:

Lined pit Monitor attachment:

Lined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?

Lined pit bond number:

Lined pit bond amount:

Additional bond information attachment:

Section 3 - Unlined Pits

Would you like to utilize Unlined Pit PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Unlined pit PWD on or off channel:

Unlined pit PWD discharge volume (bbl/day):

Unlined pit specifications:

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal permit:

Unlined pit precipitated solids disposal schedule:

Unlined pit precipitated solids disposal schedule attachment:

Unlined pit reclamation description:

Unlined pit reclamation attachment:

Unlined pit Monitor description:

Unlined pit Monitor attachment:

Do you propose to put the produced water to beneficial use?

Beneficial use user confirmation:

Estimated depth of the shallowest aquifer (feet):

Does the produced water have an annual average Total Dissolved Solids (TDS) concentration equal to or less than that of the existing water to be protected?

TDS lab results:

Geologic and hydrologic evidence:

State authorization:

Unlined Produced Water Pit Estimated percolation:

Unlined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?

Unlined pit bond number:

Unlined pit bond amount:

Additional bond information attachment:

Section 4 - Injection

Would you like to utilize Injection PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Injection PWD discharge volume (bbl/day):

Injection well mineral owner:

Injection well type:

Injection well number:

Assigned injection well API number?

Injection well new surface disturbance (acres):

Minerals protection information:

Mineral protection attachment:

Underground Injection Control (UIC) Permit?

UIC Permit attachment:

Injection well name:

Injection well API number:

Section 5 - Surface Discharge

Would you like to utilize Surface Discharge PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Surface discharge PWD discharge volume (bbl/day):

Surface Discharge NPDES Permit?

Surface Discharge NPDES Permit attachment:

Surface Discharge site facilities information:

Surface discharge site facilities map:

Section 6 - Other

Would you like to utilize Other PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Other PWD discharge volume (bbl/day):

Other PWD type description:

Other PWD type attachment:

Have other regulatory requirements been met?

Other regulatory requirements attachment:

Bond Information**Federal/Indian APD:** FED**BLM Bond number:** NMB001188**BIA Bond number:****Do you have a reclamation bond?** NO**Is the reclamation bond a rider under the BLM bond?****Is the reclamation bond BLM or Forest Service?****BLM reclamation bond number:****Forest Service reclamation bond number:****Forest Service reclamation bond attachment:****Reclamation bond number:****Reclamation bond amount:****Reclamation bond rider amount:****Additional reclamation bond information attachment:**