

Survey Report

30-015-44025 MAR 12 2018

Company:	MATADOR RESOURCES	Local Co-ordinate Reference:	Well #208H - Slot 208H
Project:	Eddy County, New Mexico	TVD Reference:	3101+28.5 @ 3129.50usft (Patterson282)
Site:	Charlie Sweeney Fed Com #204H, #208H, #228H	MD Reference:	3101+28.5 @ 3129.50usft (Patterson282)
Well:	#208H	North Reference:	Grid
Wellbore:	Lateral	Survey Calculation Method:	Minimum Curvature
Design:	Lateral	Database:	EDM 5000 14 Multi User

Project	Eddy County, New Mexico		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site Charlie Sweeney Fed Com #204H, #208H, #228H, centered on 208					
Site Position:		Northing:	456,419.03 usft	Latitude:	32° 15' 16.68 N
From:	Map	Easting:	566,069.74 usft	Longitude:	104° 7' 10.59 W
Position Uncertainty:	0.00 usft	Slot Radius:	13.200 in	Grid Convergence:	0.11 °

Well	#208H - Slot 208H				
Well Position	+N/-S	0.00 usft	Northing:	456,419.03 usft	Latitude: 32° 15' 16.68 N
	+E/-W	0.00 usft	Easting:	566,069.74 usft	Longitude: 104° 7' 10.59 W
Position Uncertainty	0.00 usft		Wellhead Elevation:	0.00 usft	Ground Level: 3,101.00 usft

Wellbore	Lateral				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	HDGM	8/7/2017	7.33	60.07	48,095

Design	Lateral				
Audit Notes:					
Version:	1.0	Phase:	ACTUAL	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)	
	0.00	0.00	0.00	0.49	

Survey Program		Date	10/7/2017	
From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description
97.00	14,104.00	Survey #1 (Lateral)	MWD+HRGM	OWSG MWD + HRGM
14,181.00	14,181.00	Survey #2 (Lateral)	Projection	Projection to Bit

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
97.00	1.16	119.97	96.99	-0.49	0.85	-0.48	1.20	1.20	0.00
223.00	1.28	22.35	222.98	0.17	2.49	0.20	1.46	0.10	-77.48
290.00	1.29	14.66	289.96	1.60	2.97	1.62	0.26	0.01	-11.48
403.00	1.34	351.06	402.93	4.13	3.08	4.16	0.48	0.04	-20.88
498.00	1.58	351.57	497.90	6.52	2.72	6.55	0.25	0.25	0.54
590.00	0.61	339.59	589.88	8.24	2.36	8.26	1.08	-1.05	-13.02
683.00	1.67	174.35	682.87	7.35	2.32	7.37	2.44	1.14	-177.68
774.00	4.33	161.63	773.74	2.77	3.54	2.80	3.00	2.92	-13.98

Survey Report

Company:	MATADOR RESOURCES	Local Co-ordinate Reference:	Well #208H - Slot 208H
Project:	Eddy County, New Mexico	TVD Reference:	3101+28.5 @ 3129.50usft (Patterson282)
Site:	Charlie Sweeney Fed Com #204H, #208H, #228H	MD Reference:	3101+28.5 @ 3129.50usft (Patterson282)
Well:	#208H	North Reference:	Grid
Wellbore:	Lateral	Survey Calculation Method:	Minimum Curvature
Design:	Lateral	Database:	EDM 5000 14 Multi User

Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
867.00	3.75	166.38	866.51	-3.51	5.36	-3.47	0.72	-0.62	5.11
961.00	3.49	162.00	960.32	-9.22	6.97	-9.16	0.40	-0.28	-4.66
1,055.00	2.99	175.39	1,054.17	-14.39	8.05	-14.32	0.96	-0.53	14.24
1,150.00	2.58	184.50	1,149.06	-18.99	8.08	-18.92	0.63	-0.43	9.59
1,244.00	2.07	184.14	1,242.98	-22.79	7.79	-22.72	0.54	-0.54	-0.38
1,338.00	2.22	153.64	1,336.92	-26.12	8.48	-26.04	1.21	0.16	-32.45
1,432.00	3.51	144.12	1,430.80	-30.08	10.97	-29.98	1.46	1.37	-10.13
1,526.00	3.90	146.05	1,524.60	-35.06	14.44	-34.94	0.44	0.41	2.05
1,620.00	3.77	141.62	1,618.39	-40.14	18.15	-39.98	0.34	-0.14	-4.71
1,715.00	3.69	138.58	1,713.19	-44.88	22.11	-44.69	0.22	-0.08	-3.20
1,810.00	2.81	142.44	1,808.04	-49.02	25.55	-48.80	0.95	-0.93	4.06
1,904.00	2.95	133.58	1,901.92	-52.51	28.71	-52.26	0.50	0.15	-9.43
1,999.00	3.38	126.11	1,996.77	-55.85	32.74	-55.56	0.63	0.45	-7.86
2,092.00	3.96	131.11	2,089.58	-59.57	37.37	-59.25	0.71	0.62	5.38
2,186.00	4.81	145.19	2,183.31	-64.94	42.07	-64.58	1.45	0.90	14.98
2,281.00	5.49	156.12	2,277.93	-72.37	46.18	-71.97	1.25	0.72	11.51
2,375.00	4.53	150.19	2,371.57	-79.70	49.85	-79.27	1.16	-1.02	-6.31
2,389.00	4.46	150.05	2,385.53	-80.65	50.40	-80.22	0.51	-0.50	-1.00
2,472.00	4.04	153.51	2,468.30	-86.07	53.31	-85.61	0.59	-0.51	4.17
2,567.00	3.65	152.21	2,563.08	-91.74	56.21	-91.25	0.42	-0.41	-1.37
2,662.00	3.59	155.91	2,657.89	-97.13	58.84	-96.62	0.25	-0.06	3.89
2,756.00	3.44	157.50	2,751.72	-102.42	61.12	-101.89	0.19	-0.16	1.69
2,850.00	3.30	157.09	2,845.56	-107.52	63.25	-106.97	0.15	-0.15	-0.44
2,943.00	3.46	153.09	2,938.39	-112.48	65.56	-111.92	0.31	0.17	-4.30
3,036.00	3.36	150.63	3,031.23	-117.36	68.17	-116.78	0.19	-0.11	-2.65
3,131.00	3.17	150.94	3,126.07	-122.08	70.81	-121.47	0.20	-0.20	0.33
3,225.00	3.02	151.84	3,219.94	-126.54	73.24	-125.91	0.17	-0.16	0.96
3,318.00	2.58	155.45	3,312.83	-130.60	75.27	-129.95	0.51	-0.47	3.88
3,412.00	1.83	206.29	3,406.76	-133.87	75.48	-133.22	2.14	-0.80	54.08
3,504.00	2.06	216.74	3,498.71	-136.52	73.84	-135.88	0.46	0.25	11.36
3,598.00	2.07	213.65	3,592.65	-139.28	71.89	-138.66	0.12	0.01	-3.29
3,692.00	1.42	265.97	3,686.61	-140.78	69.79	-140.18	1.75	-0.69	55.66
3,786.00	1.67	269.00	3,780.58	-140.88	67.26	-140.30	0.28	0.27	3.22
3,880.00	1.87	317.63	3,874.54	-139.77	64.85	-139.21	1.56	0.21	51.73
3,973.00	2.03	320.68	3,967.48	-137.38	62.79	-136.84	0.21	0.17	3.28
4,067.00	1.83	315.57	4,061.43	-135.02	60.68	-134.50	0.28	-0.21	-5.44
4,161.00	1.93	317.78	4,155.38	-132.78	58.57	-132.27	0.13	0.11	2.35
4,254.00	1.96	314.28	4,248.33	-130.51	56.38	-130.02	0.13	0.03	-3.76
4,348.00	0.36	288.40	4,342.30	-129.29	54.95	-128.82	1.75	-1.70	-27.53
4,442.00	0.15	242.87	4,436.30	-129.25	54.56	-128.78	0.29	-0.22	-48.44
4,537.00	0.70	244.82	4,531.30	-129.56	53.92	-129.09	0.58	0.58	2.05
4,631.00	0.81	81.79	4,625.30	-129.71	54.06	-129.24	1.59	0.12	-173.44

Survey Report

Company:	MATADOR RESOURCES	Local Co-ordinate Reference:	Well #208H - Slot 208H
Project:	Eddy County, New Mexico	TVD Reference:	3101+28.5 @ 3129.50usft (Patterson282)
Site:	Charlie Sweeney Fed Com #204H, #208H, #228H	MD Reference:	3101+28.5 @ 3129.50usft (Patterson282)
Well:	#208H	North Reference:	Grid
Wellbore:	Lateral	Survey Calculation Method:	Minimum Curvature
Design:	Lateral	Database:	EDM 5000 14 Multi User

Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
4,725.00	0.58	88.50	4,719.29	-129.60	55.19	-129.12	0.26	-0.24	7.14
4,820.00	0.36	94.16	4,814.29	-129.61	55.97	-129.12	0.24	-0.23	5.96
4,914.00	0.28	139.96	4,908.29	-129.80	56.41	-129.32	0.28	-0.09	48.72
5,008.00	0.42	127.91	5,002.28	-130.19	56.83	-129.70	0.17	0.15	-12.82
5,102.00	0.36	182.24	5,096.28	-130.70	57.09	-130.21	0.38	-0.06	57.80
5,196.00	0.38	161.41	5,190.28	-131.29	57.18	-130.80	0.14	0.02	-22.16
5,290.00	0.44	159.52	5,284.28	-131.92	57.41	-131.43	0.07	0.06	-2.01
5,385.00	0.64	173.36	5,379.27	-132.79	57.59	-132.29	0.25	0.21	14.57
5,478.00	0.61	175.79	5,472.27	-133.80	57.69	-133.30	0.04	-0.03	2.61
5,572.00	0.72	171.73	5,566.26	-134.88	57.81	-134.39	0.13	0.12	-4.32
5,666.00	0.93	190.54	5,660.25	-136.22	57.76	-135.72	0.36	0.22	20.01
5,759.00	0.74	198.90	5,753.24	-137.53	57.43	-137.03	0.24	-0.20	8.99
5,853.00	1.05	190.94	5,847.23	-138.95	57.07	-138.46	0.35	0.33	-8.47
5,947.00	0.82	208.24	5,941.22	-140.39	56.58	-139.90	0.38	-0.24	18.40
6,041.00	1.92	246.52	6,035.19	-141.61	54.82	-141.13	1.46	1.17	40.72
6,134.00	3.18	243.00	6,128.10	-143.40	51.09	-142.96	1.36	1.35	-3.78
6,228.00	1.53	255.84	6,222.02	-144.89	47.55	-144.48	1.83	-1.76	13.66
6,322.00	0.04	59.08	6,316.01	-145.18	46.36	-144.78	1.67	-1.59	173.66
6,416.00	0.40	93.74	6,410.00	-145.19	46.72	-144.78	0.39	0.38	36.87
6,511.00	1.48	146.92	6,504.99	-146.23	47.72	-145.82	1.35	1.14	55.98
6,605.00	2.92	92.74	6,598.93	-147.37	50.78	-146.93	2.53	1.53	-57.64
6,700.00	2.75	83.13	6,693.81	-147.21	55.45	-146.73	0.53	-0.18	-10.12
6,794.00	2.48	83.15	6,787.71	-146.70	59.71	-146.18	0.29	-0.29	0.02
6,889.00	2.24	88.59	6,882.63	-146.41	63.61	-145.86	0.35	-0.25	5.73
6,982.00	1.50	87.99	6,975.58	-146.32	66.64	-145.74	0.80	-0.80	-0.65
7,076.00	1.32	13.89	7,069.56	-145.22	68.13	-144.64	1.81	-0.19	-78.83
7,170.00	1.67	345.83	7,163.53	-142.85	68.06	-142.26	0.85	0.37	-29.85
7,264.00	2.85	340.85	7,257.46	-139.31	66.96	-138.73	1.27	1.26	-5.30
7,358.00	2.56	329.48	7,351.35	-135.29	65.12	-134.73	0.65	-0.31	-12.10
7,452.00	2.95	323.61	7,445.24	-131.54	62.62	-131.00	0.51	0.41	-6.24
7,544.00	1.33	295.09	7,537.18	-129.18	60.25	-128.66	2.06	-1.76	-31.00
7,639.00	1.50	299.75	7,632.15	-128.09	58.17	-127.59	0.22	0.18	4.91
7,732.00	1.93	253.51	7,725.11	-127.94	55.61	-127.46	1.51	0.46	-49.72
7,826.00	1.89	250.97	7,819.06	-128.89	52.63	-128.44	0.10	-0.04	-2.70
7,920.00	1.73	245.39	7,913.01	-129.99	49.87	-129.56	0.25	-0.17	-5.94
8,013.00	1.67	234.20	8,005.97	-131.36	47.50	-130.95	0.36	-0.06	-12.03
8,107.00	1.83	219.54	8,099.93	-133.32	45.43	-132.93	0.50	0.17	-15.60
8,200.00	2.09	211.66	8,192.87	-135.91	43.60	-135.53	0.40	0.28	-8.47
8,294.00	1.95	189.50	8,286.82	-138.95	42.43	-138.58	0.84	-0.15	-23.57
8,388.00	1.95	190.44	8,380.76	-142.10	41.88	-141.73	0.03	0.00	1.00
8,482.00	2.63	182.00	8,474.69	-145.83	41.51	-145.47	0.81	0.72	-8.98
8,576.00	2.37	163.24	8,568.60	-149.84	42.00	-149.48	0.91	-0.28	-19.96
8,670.00	2.68	161.60	8,662.51	-153.79	43.25	-153.41	0.34	0.33	-1.74

Survey Report

Company:	MATADOR RESOURCES	Local Co-ordinate Reference:	Well #208H - Slot 208H
Project:	Eddy County, New Mexico	TVD Reference:	3101+28.5 @ 3129.50usft (Patterson282)
Site:	Charlie Sweeney Fed Com #204H, #208H, #228H	MD Reference:	3101+28.5 @ 3129.50usft (Patterson282)
Well:	#208H	North Reference:	Grid
Wellbore:	Lateral	Survey Calculation Method:	Minimum Curvature
Design:	Lateral	Database:	EDM 5000 14 Multi User

Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
8,722.00	2.45	176.90	8,714.46	-156.05	43.70	-155.67	1.38	-0.44	29.42
8,801.00	0.21	135.00	8,793.43	-157.84	43.89	-157.46	2.91	-2.84	-53.04
8,895.00	10.37	358.35	8,886.93	-149.48	43.77	-149.10	11.20	10.81	-145.37
8,989.00	22.08	358.34	8,977.03	-123.27	43.01	-122.90	12.46	12.46	-0.01
9,082.00	31.74	4.77	9,059.87	-81.32	44.54	-80.93	10.83	10.39	6.91
9,176.00	42.46	14.46	9,134.80	-25.74	54.56	-25.28	12.96	11.40	10.31
9,269.00	51.02	16.54	9,198.48	39.43	72.72	40.05	9.35	9.20	2.24
9,363.00	58.45	13.76	9,252.72	113.47	92.68	114.26	8.26	7.90	-2.96
9,457.00	63.07	12.14	9,298.63	193.39	111.03	194.33	5.14	4.91	-1.72
9,551.00	66.96	11.45	9,338.32	276.78	128.44	277.86	4.19	4.14	-0.73
9,603.00	71.53	10.03	9,356.75	324.54	137.49	325.70	9.15	8.79	-2.73
9,678.00	72.00	9.02	9,380.22	394.79	149.27	396.05	1.42	0.63	-1.35
9,740.00	76.83	7.10	9,396.87	453.90	157.63	455.23	8.34	7.79	-3.10
9,762.00	82.07	6.86	9,400.90	475.36	160.26	476.71	23.84	23.82	-1.09
9,824.00	92.27	11.79	9,403.96	536.36	170.29	537.80	18.26	16.45	7.95
9,866.00	92.01	11.60	9,402.39	577.46	178.80	578.97	0.77	-0.62	-0.45
9,961.00	95.26	7.23	9,396.36	670.96	194.31	672.60	5.72	3.42	-4.60
10,056.00	94.87	3.67	9,387.97	765.14	203.29	766.86	3.76	-0.41	-3.75
10,149.00	93.66	1.07	9,381.05	857.80	207.12	859.54	3.08	-1.30	-2.80
10,244.00	91.80	359.77	9,376.53	952.68	207.82	954.42	2.39	-1.96	-1.37
10,338.00	88.36	0.07	9,376.40	1,046.67	207.69	1,048.40	3.67	-3.66	0.32
10,432.00	86.31	359.91	9,380.77	1,140.56	207.67	1,142.29	2.19	-2.18	-0.17
10,527.00	83.79	0.13	9,388.97	1,235.20	207.70	1,236.93	2.66	-2.65	0.23
10,620.00	85.81	0.02	9,397.39	1,327.81	207.83	1,329.54	2.18	2.17	-0.12
10,714.00	89.44	1.19	9,401.29	1,421.71	208.82	1,423.44	4.06	3.86	1.24
10,809.00	90.31	0.83	9,401.50	1,516.69	210.49	1,518.44	0.99	0.92	-0.38
10,902.00	88.31	359.07	9,402.62	1,609.68	210.41	1,611.42	2.86	-2.15	-1.89
10,996.00	88.47	359.58	9,405.26	1,703.63	209.30	1,705.36	0.57	0.17	0.54
11,090.00	92.10	0.35	9,404.79	1,797.61	209.25	1,799.34	3.95	3.86	0.82
11,184.00	89.15	359.84	9,403.76	1,891.60	209.40	1,893.32	3.18	-3.14	-0.54
11,279.00	86.70	358.80	9,407.20	1,986.52	208.28	1,988.23	2.80	-2.58	-1.09
11,373.00	86.06	358.63	9,413.14	2,080.31	206.17	2,082.00	0.70	-0.68	-0.18
11,467.00	86.88	359.03	9,418.93	2,174.11	204.26	2,175.78	0.97	0.87	0.43
11,561.00	90.15	1.12	9,421.36	2,268.06	204.38	2,269.73	4.13	3.48	2.22
11,656.00	90.09	0.00	9,421.16	2,363.05	205.31	2,364.72	1.18	-0.06	-1.18
11,750.00	89.38	359.23	9,421.60	2,457.05	204.68	2,458.71	1.11	-0.76	-0.82
11,845.00	89.62	358.45	9,422.43	2,552.03	202.76	2,553.67	0.86	0.25	-0.82
11,939.00	89.66	357.96	9,423.02	2,645.98	199.81	2,647.59	0.52	0.04	-0.52
12,034.00	88.31	359.81	9,424.70	2,740.94	197.96	2,742.53	2.41	-1.42	1.95
12,128.00	91.53	1.35	9,424.83	2,834.92	198.91	2,836.52	3.80	3.43	1.64
12,223.00	88.43	0.18	9,424.87	2,929.90	200.18	2,931.50	3.49	-3.26	-1.23
12,317.00	90.97	0.31	9,425.36	3,023.89	200.58	3,025.49	2.71	2.70	0.14

Survey Report

Company:	MATADOR RESOURCES	Local Co-ordinate Reference:	Well #208H - Slot 208H
Project:	Eddy County, New Mexico	TVD Reference:	3101+28.5 @ 3129.50usft (Patterson282)
Site:	Charlie Sweeney Fed Com #204H, #208H, #228H	MD Reference:	3101+28.5 @ 3129.50usft (Patterson282)
Well:	#208H	North Reference:	Grid
Wellbore:	Lateral	Survey Calculation Method:	Minimum Curvature
Design:	Lateral	Database:	EDM 5000 14 Multi User

Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
12,411.00	90.79	359.97	9,423.91	3,117.88	200.81	3,119.48	0.41	-0.19	-0.36
12,506.00	88.94	1.24	9,424.14	3,212.86	201.82	3,214.47	2.36	-1.95	1.34
12,600.00	89.56	2.39	9,425.37	3,306.81	204.79	3,308.44	1.39	0.66	1.22
12,694.00	87.27	3.25	9,427.97	3,400.65	209.42	3,402.32	2.60	-2.44	0.91
12,788.00	88.50	3.52	9,431.44	3,494.42	214.96	3,496.13	1.34	1.31	0.29
12,882.00	92.13	3.67	9,430.92	3,588.22	220.86	3,589.97	3.86	3.86	0.16
12,976.00	89.37	2.76	9,429.69	3,682.05	226.13	3,683.85	3.09	-2.94	-0.97
13,070.00	87.30	1.70	9,432.42	3,775.93	229.78	3,777.76	2.47	-2.20	-1.13
13,164.00	90.14	1.86	9,434.52	3,869.86	232.70	3,871.70	3.03	3.02	0.17
13,257.00	89.26	2.43	9,435.01	3,962.79	236.18	3,964.66	1.13	-0.95	0.61
13,351.00	89.29	3.70	9,436.20	4,056.64	241.21	4,058.56	1.35	0.03	1.35
13,445.00	89.56	5.62	9,437.14	4,150.32	248.84	4,152.30	2.06	0.29	2.04
13,540.00	89.51	3.20	9,437.91	4,245.03	256.15	4,247.07	2.55	-0.05	-2.55
13,634.00	90.07	2.13	9,438.26	4,338.93	260.52	4,341.00	1.28	0.60	-1.14
13,728.00	87.86	1.63	9,439.95	4,432.86	263.60	4,434.95	2.41	-2.35	-0.53
13,822.00	92.09	1.03	9,440.00	4,526.81	265.78	4,528.92	4.55	4.50	-0.64
13,916.00	90.46	359.60	9,437.90	4,620.78	266.30	4,622.89	2.31	-1.73	-1.52
14,010.00	90.39	0.25	9,437.21	4,714.78	266.18	4,716.88	0.70	-0.07	0.69
14,104.00	88.68	0.16	9,437.97	4,808.77	266.51	4,810.87	1.82	-1.82	-0.10
14,181.00	88.68	0.16	9,439.74	4,885.75	266.73	4,887.85	0.00	0.00	0.00

Design Targets

Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
- hit/miss target									
- Shape									
CSFC 208H SL	0.00	0.00	0.00	0.00	0.00	456,419.03	566,069.74	32° 15' 16.68 N	104° 7' 10.59 W
- actual wellpath hits target center									
- Point									
CSFC 208H BHL	0.00	0.00	9,439.74	4,885.75	266.73	461,304.78	566,336.46	32° 16' 5.02 N	104° 7' 7.37 W
- actual wellpath hits target center									
- Point									

MATADOR RESOURCES



Project: Eddy County, New Mexico

Site: Charlie Sweeney Fed Com #204H, #208H, #228H

Well: #208H

Wellbore: Lateral

Design: Lateral

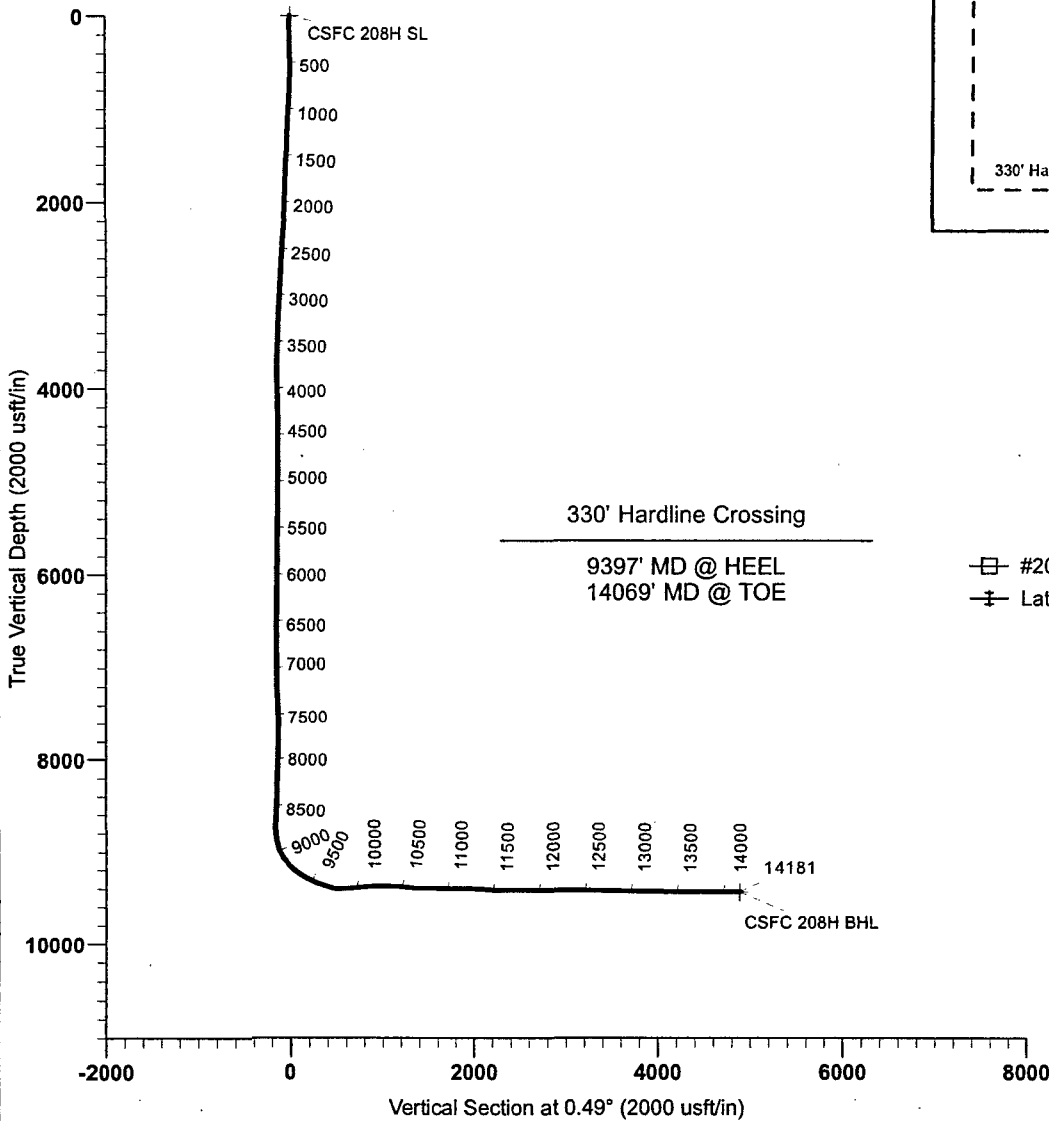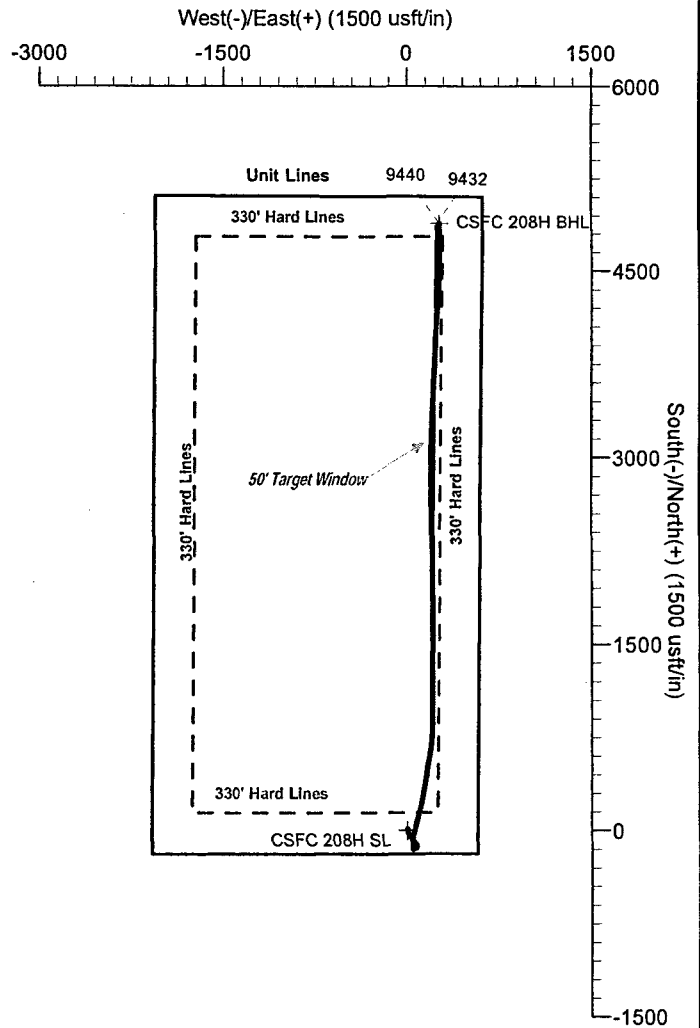

LEGEND

- #208H, Lateral, Plan #7 V0
- ⊕ Lateral

Name	TVD	+N/-S	+E/-W	Northing	Easting	Shape Point
CSFC 208H SL	0.00	0.00	0.00	456419.03	566069.73	Point
CSFC 208H BHL	9439.74	4885.75	266.73	461304.77	566336.46	Point

Design: Lateral (#208H/Lateral)

Created By: Ashley Wischnewsky
Date: 9:42, October 10 2017

PREMIER DIRECTIONAL DRILLING
363 N Sam Houston Pwky E, Ste 300 Houston, TX 77060
Phone: 281-673-4000

