



RECEIVED

AUG 20 2018

DISTRICT II-ARTESIA O.C.D.

XTO ENERGY, INC.

Eddy County, NM

Sec 36, T23S, R30E

Los Medanos 36-23-30 State #112H

Wellbore #1

30-015-45206

Plan: Design #1

QES Well Planning Report

08 August, 2018





Well Planning Report



Database: EDM 5000.1 Single User Db
Company: XTO ENERGY, INC.
Project: Eddy County, NM
Site: Sec 36, T23S, R30E
Well: Los Medanos 36-23-30 State #112H
Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference: Well Los Medanos 36-23-30 State #112H
TVD Reference: RKB @ 3428.5usft (Trinidad #445)
MD Reference: RKB @ 3428.5usft (Trinidad #445)
North Reference: True
Survey Calculation Method: Minimum Curvature

Project	Eddy County, NM		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site	Sec 36, T23S, R30E				
Site Position:	From: Map	Northing:	456,891.30 usft	Latitude:	32° 15' 18.556 N
		Easting:	651,988.20 usft	Longitude:	103° 50' 30.036 W
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "	Grid Convergence:	0.26 "

Well	Los Medanos 36-23-30 State #112H					
Well Position	+N/-S	-75.2 usft	Northing:	456,823.70 usft	Latitude:	32° 15' 17.811 N
	+E/-W	1,665.5 usft	Easting:	653,654.00 usft	Longitude:	103° 50' 10.641 W
Position Uncertainty	0.0 usft	Wellhead Elevation:		Ground Level:	3,412.0 usft	

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2015	8/22/2018	6.95	60.03	47,807.27817007

Design	Design #1			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.0	0.0	0.0	354.88

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
5,000.0	0.00	0.00	5,000.0	0.0	0.0	0.00	0.00	0.00	0.00	
5,131.5	3.95	255.63	5,131.4	-1.1	-4.4	3.00	3.00	0.00	255.63	
10,811.3	3.95	255.63	10,797.7	-98.1	-383.1	0.00	0.00	0.00	0.00	
11,720.9	90.00	359.80	11,379.0	474.6	-423.9	10.00	9.46	11.45	104.14	
16,150.9	90.00	359.80	11,379.0	4,904.6	-439.4	0.00	0.00	0.00	0.00	PBHL - LM 112H



Well Planning Report



Database: EDM 5000.1 Single User Db
Company: XTO ENERGY, INC.
Project: Eddy County, NM
Site: Sec 36, T23S, R30E
Well: Los Medanos 36-23-30 State #112H
Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference: Well Los Medanos 36-23-30 State #112H
TVD Reference: RKB @ 3428.5usft (Trinidad #445)
MD Reference: RKB @ 3428.5usft (Trinidad #445)
North Reference: True
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
Rustler									
296.5	0.00	0.00	296.5	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
Top Salt*									
611.5	0.00	0.00	611.5	0.0	0.0	0.0	0.00	0.00	0.00
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00
800.0	0.00	0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.0	0.00	0.00	0.00
1,100.0	0.00	0.00	1,100.0	0.0	0.0	0.0	0.00	0.00	0.00
1,200.0	0.00	0.00	1,200.0	0.0	0.0	0.0	0.00	0.00	0.00
1,300.0	0.00	0.00	1,300.0	0.0	0.0	0.0	0.00	0.00	0.00
1,400.0	0.00	0.00	1,400.0	0.0	0.0	0.0	0.00	0.00	0.00
1,500.0	0.00	0.00	1,500.0	0.0	0.0	0.0	0.00	0.00	0.00
1,600.0	0.00	0.00	1,600.0	0.0	0.0	0.0	0.00	0.00	0.00
1,700.0	0.00	0.00	1,700.0	0.0	0.0	0.0	0.00	0.00	0.00
1,800.0	0.00	0.00	1,800.0	0.0	0.0	0.0	0.00	0.00	0.00
1,900.0	0.00	0.00	1,900.0	0.0	0.0	0.0	0.00	0.00	0.00
2,000.0	0.00	0.00	2,000.0	0.0	0.0	0.0	0.00	0.00	0.00
2,100.0	0.00	0.00	2,100.0	0.0	0.0	0.0	0.00	0.00	0.00
2,200.0	0.00	0.00	2,200.0	0.0	0.0	0.0	0.00	0.00	0.00
2,300.0	0.00	0.00	2,300.0	0.0	0.0	0.0	0.00	0.00	0.00
2,400.0	0.00	0.00	2,400.0	0.0	0.0	0.0	0.00	0.00	0.00
2,500.0	0.00	0.00	2,500.0	0.0	0.0	0.0	0.00	0.00	0.00
2,600.0	0.00	0.00	2,600.0	0.0	0.0	0.0	0.00	0.00	0.00
2,700.0	0.00	0.00	2,700.0	0.0	0.0	0.0	0.00	0.00	0.00
2,800.0	0.00	0.00	2,800.0	0.0	0.0	0.0	0.00	0.00	0.00
2,900.0	0.00	0.00	2,900.0	0.0	0.0	0.0	0.00	0.00	0.00
3,000.0	0.00	0.00	3,000.0	0.0	0.0	0.0	0.00	0.00	0.00
3,100.0	0.00	0.00	3,100.0	0.0	0.0	0.0	0.00	0.00	0.00
3,200.0	0.00	0.00	3,200.0	0.0	0.0	0.0	0.00	0.00	0.00
3,300.0	0.00	0.00	3,300.0	0.0	0.0	0.0	0.00	0.00	0.00
3,400.0	0.00	0.00	3,400.0	0.0	0.0	0.0	0.00	0.00	0.00
3,500.0	0.00	0.00	3,500.0	0.0	0.0	0.0	0.00	0.00	0.00
3,600.0	0.00	0.00	3,600.0	0.0	0.0	0.0	0.00	0.00	0.00
3,700.0	0.00	0.00	3,700.0	0.0	0.0	0.0	0.00	0.00	0.00
Base of Salt (Anhydrite)									
3,770.5	0.00	0.00	3,770.5	0.0	0.0	0.0	0.00	0.00	0.00
3,800.0	0.00	0.00	3,800.0	0.0	0.0	0.0	0.00	0.00	0.00
3,900.0	0.00	0.00	3,900.0	0.0	0.0	0.0	0.00	0.00	0.00
4,000.0	0.00	0.00	4,000.0	0.0	0.0	0.0	0.00	0.00	0.00
Bell Canyon Ss./ Delaware									
4,042.5	0.00	0.00	4,042.5	0.0	0.0	0.0	0.00	0.00	0.00
4,100.0	0.00	0.00	4,100.0	0.0	0.0	0.0	0.00	0.00	0.00
4,200.0	0.00	0.00	4,200.0	0.0	0.0	0.0	0.00	0.00	0.00
4,300.0	0.00	0.00	4,300.0	0.0	0.0	0.0	0.00	0.00	0.00
4,400.0	0.00	0.00	4,400.0	0.0	0.0	0.0	0.00	0.00	0.00
4,500.0	0.00	0.00	4,500.0	0.0	0.0	0.0	0.00	0.00	0.00



Well Planning Report



Database: EDM 5000.1 Single User Db
Company: XTO ENERGY, INC.
Project: Eddy County, NM
Site: Sec 36, T23S, R30E
Well: Los Medanos 36-23-30 State #112H
Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference: Well Los Medanos 36-23-30 State #112H
TVD Reference: RKB @ 3428.5usft (Trinidad #445)
MD Reference: RKB @ 3428.5usft (Trinidad #445)
North Reference: True
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
4,600.0	0.00	0.00	4,600.0	0.0	0.0	0.0	0.00	0.00	0.00
4,700.0	0.00	0.00	4,700.0	0.0	0.0	0.0	0.00	0.00	0.00
4,800.0	0.00	0.00	4,800.0	0.0	0.0	0.0	0.00	0.00	0.00
4,900.0	0.00	0.00	4,900.0	0.0	0.0	0.0	0.00	0.00	0.00
Cherry Canyon Ss.									
4,943.5	0.00	0.00	4,943.5	0.0	0.0	0.0	0.00	0.00	0.00
Build 3°/100'									
5,000.0	0.00	0.00	5,000.0	0.0	0.0	0.0	0.00	0.00	0.00
5,100.0	3.00	255.63	5,100.0	-0.6	-2.5	-0.4	3.00	3.00	0.00
EOB @ 3.95° Inc / 255.63° Azm									
5,131.5	3.95	255.63	5,131.4	-1.1	-4.4	-0.7	3.00	3.00	0.00
5,200.0	3.95	255.63	5,199.7	-2.3	-9.0	-1.5	0.00	0.00	0.00
5,300.0	3.95	255.63	5,299.5	-4.0	-15.6	-2.6	0.00	0.00	0.00
5,400.0	3.95	255.63	5,399.3	-5.7	-22.3	-3.7	0.00	0.00	0.00
5,500.0	3.95	255.63	5,499.0	-7.4	-29.0	-4.8	0.00	0.00	0.00
5,600.0	3.95	255.63	5,598.8	-9.1	-35.6	-5.9	0.00	0.00	0.00
5,700.0	3.95	255.63	5,698.5	-10.8	-42.3	-7.0	0.00	0.00	0.00
5,800.0	3.95	255.63	5,798.3	-12.5	-49.0	-8.1	0.00	0.00	0.00
5,900.0	3.95	255.63	5,898.1	-14.2	-55.6	-9.2	0.00	0.00	0.00
6,000.0	3.95	255.63	5,997.8	-16.0	-62.3	-10.3	0.00	0.00	0.00
6,100.0	3.95	255.63	6,097.6	-17.7	-69.0	-11.4	0.00	0.00	0.00
6,200.0	3.95	255.63	6,197.4	-19.4	-75.6	-12.5	0.00	0.00	0.00
6,300.0	3.95	255.63	6,297.1	-21.1	-82.3	-13.7	0.00	0.00	0.00
6,400.0	3.95	255.63	6,396.9	-22.8	-89.0	-14.8	0.00	0.00	0.00
6,500.0	3.95	255.63	6,496.7	-24.5	-95.6	-15.9	0.00	0.00	0.00
Brushy Canyon Ss.									
6,559.0	3.95	255.63	6,555.5	-25.5	-99.6	-16.5	0.00	0.00	0.00
6,600.0	3.95	255.63	6,596.4	-26.2	-102.3	-17.0	0.00	0.00	0.00
6,700.0	3.95	255.63	6,696.2	-27.9	-109.0	-18.1	0.00	0.00	0.00
6,800.0	3.95	255.63	6,795.9	-29.6	-115.6	-19.2	0.00	0.00	0.00
6,900.0	3.95	255.63	6,895.7	-31.3	-122.3	-20.3	0.00	0.00	0.00
7,000.0	3.95	255.63	6,995.5	-33.0	-129.0	-21.4	0.00	0.00	0.00
7,100.0	3.95	255.63	7,095.2	-34.7	-135.6	-22.5	0.00	0.00	0.00
7,200.0	3.95	255.63	7,195.0	-36.4	-142.3	-23.6	0.00	0.00	0.00
7,300.0	3.95	255.63	7,294.8	-38.2	-149.0	-24.7	0.00	0.00	0.00
7,400.0	3.95	255.63	7,394.5	-39.9	-155.6	-25.8	0.00	0.00	0.00
7,500.0	3.95	255.63	7,494.3	-41.6	-162.3	-26.9	0.00	0.00	0.00
7,600.0	3.95	255.63	7,594.0	-43.3	-169.0	-28.0	0.00	0.00	0.00
7,700.0	3.95	255.63	7,693.8	-45.0	-175.6	-29.1	0.00	0.00	0.00
7,800.0	3.95	255.63	7,793.6	-46.7	-182.3	-30.2	0.00	0.00	0.00
Bone Spring Lm.									
7,887.1	3.95	255.63	7,880.5	-48.2	-188.1	-31.2	0.00	0.00	0.00
7,900.0	3.95	255.63	7,893.3	-48.4	-189.0	-31.3	0.00	0.00	0.00
Avalon Ss.									
7,964.3	3.95	255.63	7,957.5	-49.5	-193.2	-32.1	0.00	0.00	0.00
8,000.0	3.95	255.63	7,993.1	-50.1	-195.6	-32.5	0.00	0.00	0.00
8,100.0	3.95	255.63	8,092.9	-51.8	-202.3	-33.6	0.00	0.00	0.00
8,200.0	3.95	255.63	8,192.6	-53.5	-209.0	-34.7	0.00	0.00	0.00
Bone Spg. Upper Avalon Lm.									
8,211.9	3.95	255.63	8,204.5	-53.7	-209.8	-34.8	0.00	0.00	0.00
8,300.0	3.95	255.63	8,292.4	-55.2	-215.6	-35.8	0.00	0.00	0.00
8,400.0	3.95	255.63	8,392.1	-56.9	-222.3	-36.9	0.00	0.00	0.00
8,500.0	3.95	255.63	8,491.9	-58.7	-229.0	-38.0	0.00	0.00	0.00



Well Planning Report



Database: EDM 5000.1 Single User Db
Company: XTO ENERGY, INC.
Project: Eddy County, NM
Site: Sec 36, T23S, R30E
Well: Los Medanos 36-23-30 State #112H
Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference: Well Los Medanos 36-23-30 State #112H
TVD Reference: RKB @ 3428.5usft (Trinidad #445)
MD Reference: RKB @ 3428.5usft (Trinidad #445)
North Reference: True
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
8,600.0	3.95	255.63	8,591.7	-60.4	-235.6	-39.1	0.00	0.00	0.00
8,700.0	3.95	255.63	8,691.4	-62.1	-242.3	-40.2	0.00	0.00	0.00
Bone Spg. Lower Avalon Lm.									
8,797.3	3.95	255.63	8,788.5	-63.7	-248.8	-41.3	0.00	0.00	0.00
8,800.0	3.95	255.63	8,791.2	-63.8	-249.0	-41.3	0.00	0.00	0.00
8,900.0	3.95	255.63	8,891.0	-65.5	-255.6	-42.4	0.00	0.00	0.00
1st Bone Spring Ss.									
8,917.6	3.95	255.63	8,908.5	-65.8	-256.8	-42.6	0.00	0.00	0.00
9,000.0	3.95	255.63	8,990.7	-67.2	-262.3	-43.5	0.00	0.00	0.00
9,100.0	3.95	255.63	9,090.5	-68.9	-269.0	-44.6	0.00	0.00	0.00
9,200.0	3.95	255.63	9,190.2	-70.6	-275.6	-45.7	0.00	0.00	0.00
9,300.0	3.95	255.63	9,290.0	-72.3	-282.3	-46.8	0.00	0.00	0.00
9,400.0	3.95	255.63	9,389.8	-74.0	-289.0	-47.9	0.00	0.00	0.00
2nd Bone Spring Carb.									
9,418.8	3.95	255.63	9,408.5	-74.3	-290.2	-48.1	0.00	0.00	0.00
9,500.0	3.95	255.63	9,489.5	-75.7	-295.6	-49.0	0.00	0.00	0.00
9,600.0	3.95	255.63	9,589.3	-77.4	-302.3	-50.2	0.00	0.00	0.00
9,700.0	3.95	255.63	9,689.1	-79.1	-309.0	-51.3	0.00	0.00	0.00
9,800.0	3.95	255.63	9,788.8	-80.9	-315.6	-52.4	0.00	0.00	0.00
2nd Bone Spring Ss.									
9,800.7	3.95	255.63	9,789.5	-80.9	-315.7	-52.4	0.00	0.00	0.00
9,900.0	3.95	255.63	9,888.6	-82.6	-322.3	-53.5	0.00	0.00	0.00
10,000.0	3.95	255.63	9,988.4	-84.3	-329.0	-54.6	0.00	0.00	0.00
3rd Bone Spring Carb.									
10,085.3	3.95	255.63	10,073.5	-85.7	-334.7	-55.5	0.00	0.00	0.00
10,100.0	3.95	255.63	10,088.1	-86.0	-335.6	-55.7	0.00	0.00	0.00
10,200.0	3.95	255.63	10,187.9	-87.7	-342.3	-56.8	0.00	0.00	0.00
10,300.0	3.95	255.63	10,287.6	-89.4	-349.0	-57.9	0.00	0.00	0.00
10,400.0	3.95	255.63	10,387.4	-91.1	-355.6	-59.0	0.00	0.00	0.00
10,500.0	3.95	255.63	10,487.2	-92.8	-362.3	-60.1	0.00	0.00	0.00
10,600.0	3.95	255.63	10,586.9	-94.5	-369.0	-61.2	0.00	0.00	0.00
10,700.0	3.95	255.63	10,686.7	-96.2	-375.6	-62.3	0.00	0.00	0.00
10,800.0	3.95	255.63	10,786.5	-97.9	-382.3	-63.4	0.00	0.00	0.00
Build 10°/100'									
10,811.3	3.95	255.63	10,797.7	-98.1	-383.1	-63.6	0.00	0.00	0.00
10,850.0	4.81	307.08	10,836.3	-97.5	-385.6	-62.7	10.00	2.22	132.81
3rd Bone Spring Ss.									
10,850.2	4.81	307.08	10,836.5	-97.5	-385.6	-62.7	0.00	0.00	0.00
10,900.0	8.78	334.14	10,886.0	-92.8	-389.0	-57.7	10.03	7.98	54.30
10,950.0	13.45	343.57	10,935.0	-83.8	-392.3	-48.4	10.00	9.35	18.85
11,000.0	18.30	348.13	10,983.1	-70.5	-395.5	-34.9	10.00	9.69	9.13
11,050.0	23.21	350.83	11,029.9	-53.1	-398.7	-17.3	10.00	9.82	5.39
War Wink Ss.									
11,076.0	25.77	351.84	11,053.5	-42.4	-400.4	-6.5	10.00	9.87	3.89
11,100.0	28.15	352.62	11,074.9	-31.6	-401.8	4.4	10.00	9.89	3.25
11,150.0	33.11	353.91	11,117.9	-6.3	-404.8	29.8	10.00	9.91	2.59
11,200.0	38.07	354.90	11,158.6	22.6	-407.6	58.9	10.00	9.93	1.98
Red Hills Ss.									
11,232.4	41.30	355.43	11,183.5	43.2	-409.3	79.6	10.00	9.95	1.64
11,250.0	43.05	355.69	11,196.5	55.0	-410.3	91.4	10.00	9.95	1.48
11,300.0	48.02	356.35	11,231.6	90.6	-412.7	127.1	10.00	9.96	1.31
11,350.0	53.01	356.91	11,263.3	129.1	-415.0	165.6	10.00	9.96	1.12
Wolfcamp Sh									



Well Planning Report



Database: EDM 5000.1 Single User Db
Company: XTO ENERGY, INC.
Project: Eddy County, NM
Site: Sec 36, T23S, R30E
Well: Los Medanos 36-23-30 State #112H
Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference: Well Los Medanos 36-23-30 State #112H
TVD Reference: RKB @ 3428.5usft (Trinidad #445)
MD Reference: RKB @ 3428.5usft (Trinidad #445)
North Reference: True
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
11,367.2	54.72	357.09	11,273.5	143.0	-415.7	179.5	10.00	9.97	1.02
11,400.0	57.99	357.40	11,291.6	170.2	-417.0	206.8	10.00	9.97	0.96
Wolfcamp X Sd									
11,403.5	58.34	357.44	11,293.5	173.2	-417.2	209.8	10.00	9.97	0.92
11,450.0	62.97	357.84	11,316.3	213.7	-418.8	250.2	10.00	9.97	0.88
11,500.0	67.96	358.25	11,337.0	259.1	-420.4	295.6	10.00	9.97	0.81
Wolfcamp Y Sd									
11,532.9	71.24	358.50	11,348.5	290.0	-421.2	326.4	10.00	9.97	0.76
11,550.0	72.95	358.62	11,353.8	306.2	-421.7	342.6	10.00	9.98	0.74
11,600.0	77.94	358.98	11,366.3	354.6	-422.7	390.9	10.00	9.98	0.71
11,650.0	82.92	359.32	11,374.6	403.9	-423.4	440.1	10.00	9.98	0.69
11,700.0	87.91	359.66	11,378.6	453.7	-423.8	489.7	10.00	9.98	0.67
EOC @ 90.00° Inc / 359.80° Azm / 11379.0' TVD									
11,720.9	90.00	359.80	11,379.0	474.6	-423.9	510.5	10.00	9.98	0.67
11,800.0	90.00	359.80	11,379.0	553.7	-424.2	589.3	0.00	0.00	0.00
11,900.0	90.00	359.80	11,379.0	653.7	-424.6	689.0	0.00	0.00	0.00
12,000.0	90.00	359.80	11,379.0	753.7	-424.9	788.6	0.00	0.00	0.00
12,100.0	90.00	359.80	11,379.0	853.7	-425.3	888.2	0.00	0.00	0.00
12,200.0	90.00	359.80	11,379.0	953.7	-425.6	987.9	0.00	0.00	0.00
12,300.0	90.00	359.80	11,379.0	1,053.7	-426.0	1,087.5	0.00	0.00	0.00
12,400.0	90.00	359.80	11,379.0	1,153.7	-426.3	1,187.1	0.00	0.00	0.00
12,500.0	90.00	359.80	11,379.0	1,253.7	-426.7	1,286.8	0.00	0.00	0.00
12,600.0	90.00	359.80	11,379.0	1,353.7	-427.0	1,386.4	0.00	0.00	0.00
12,700.0	90.00	359.80	11,379.0	1,453.7	-427.3	1,486.0	0.00	0.00	0.00
12,800.0	90.00	359.80	11,379.0	1,553.7	-427.7	1,585.7	0.00	0.00	0.00
12,900.0	90.00	359.80	11,379.0	1,653.7	-428.0	1,685.3	0.00	0.00	0.00
13,000.0	90.00	359.80	11,379.0	1,753.7	-428.4	1,784.9	0.00	0.00	0.00
13,100.0	90.00	359.80	11,379.0	1,853.7	-428.7	1,884.6	0.00	0.00	0.00
13,200.0	90.00	359.80	11,379.0	1,953.7	-429.1	1,984.2	0.00	0.00	0.00
13,300.0	90.00	359.80	11,379.0	2,053.7	-429.4	2,083.8	0.00	0.00	0.00
13,400.0	90.00	359.80	11,379.0	2,153.7	-429.8	2,183.5	0.00	0.00	0.00
13,500.0	90.00	359.80	11,379.0	2,253.7	-430.1	2,283.1	0.00	0.00	0.00
13,600.0	90.00	359.80	11,379.0	2,353.7	-430.5	2,382.7	0.00	0.00	0.00
13,700.0	90.00	359.80	11,379.0	2,453.7	-430.8	2,482.3	0.00	0.00	0.00
13,800.0	90.00	359.80	11,379.0	2,553.7	-431.2	2,582.0	0.00	0.00	0.00
13,900.0	90.00	359.80	11,379.0	2,653.7	-431.5	2,681.6	0.00	0.00	0.00
14,000.0	90.00	359.80	11,379.0	2,753.7	-431.9	2,781.2	0.00	0.00	0.00
14,100.0	90.00	359.80	11,379.0	2,853.7	-432.2	2,880.9	0.00	0.00	0.00
14,200.0	90.00	359.80	11,379.0	2,953.7	-432.6	2,980.5	0.00	0.00	0.00
14,300.0	90.00	359.80	11,379.0	3,053.7	-432.9	3,080.1	0.00	0.00	0.00
14,400.0	90.00	359.80	11,379.0	3,153.7	-433.3	3,179.8	0.00	0.00	0.00
14,500.0	90.00	359.80	11,379.0	3,253.7	-433.6	3,279.4	0.00	0.00	0.00
14,600.0	90.00	359.80	11,379.0	3,353.7	-434.0	3,379.0	0.00	0.00	0.00
14,700.0	90.00	359.80	11,379.0	3,453.7	-434.3	3,478.7	0.00	0.00	0.00
14,800.0	90.00	359.80	11,379.0	3,553.7	-434.7	3,578.3	0.00	0.00	0.00
14,900.0	90.00	359.80	11,379.0	3,653.7	-435.0	3,677.9	0.00	0.00	0.00
15,000.0	90.00	359.80	11,379.0	3,753.7	-435.4	3,777.6	0.00	0.00	0.00
15,100.0	90.00	359.80	11,379.0	3,853.7	-435.7	3,877.2	0.00	0.00	0.00
15,200.0	90.00	359.80	11,379.0	3,953.7	-436.1	3,976.8	0.00	0.00	0.00
15,300.0	90.00	359.80	11,379.0	4,053.7	-436.4	4,076.5	0.00	0.00	0.00
15,400.0	90.00	359.80	11,379.0	4,153.7	-436.8	4,176.1	0.00	0.00	0.00
15,500.0	90.00	359.80	11,379.0	4,253.7	-437.1	4,275.7	0.00	0.00	0.00
15,600.0	90.00	359.80	11,379.0	4,353.7	-437.5	4,375.3	0.00	0.00	0.00



Well Planning Report



Database: EDM 5000.1 Single User Db
Company: XTO ENERGY, INC.
Project: Eddy County, NM
Site: Sec 36, T23S, R30E
Well: Los Medanos 36-23-30 State #112H
Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference: Well Los Medanos 36-23-30 State #112H
TVD Reference: RKB @ 3428.5usft (Trinidad #445)
MD Reference: RKB @ 3428.5usft (Trinidad #445)
North Reference: True
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Bulld Rate (°/100usft)	Turn Rate (°/100usft)
15,700.0	90.00	359.80	11,379.0	4,453.7	-437.8	4,475.0	0.00	0.00	0.00
15,800.0	90.00	359.80	11,379.0	4,553.7	-438.2	4,574.6	0.00	0.00	0.00
15,900.0	90.00	359.80	11,379.0	4,653.7	-438.5	4,674.2	0.00	0.00	0.00
16,000.0	90.00	359.80	11,379.0	4,753.7	-438.9	4,773.9	0.00	0.00	0.00
16,100.0	90.00	359.80	11,379.0	4,853.7	-439.2	4,873.5	0.00	0.00	0.00
TD @ 16150.9' MD / 11379.0' TVD									
16,150.9	90.00	359.80	11,379.0	4,904.6	-439.4	4,924.2	0.00	0.00	0.00

Design Targets

Target Name

- hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
FTP - LM 112H - plan misses target center by 170.8usft at 11324.8usft MD (11247.7 TVD, 109.3 N, -413.9 E) - Point	0.00	0.00	11,379.0	0.5	-422.3	456,822.20	653,231.70	32° 15' 17.815 N	103° 50' 15.559 W
LTP - LM 112H - plan misses target center by 0.9usft at 16100.0usft MD (11379.0 TVD, 4853.7 N, -439.2 E) - Point	0.00	0.00	11,379.0	4,854.6	-439.1	461,676.20	653,192.40	32° 16' 5.852 N	103° 50' 15.756 W
PBHL - LM 112H - plan hits target center - Rectangle (sides W100.0 H4,430.0 D0.0)	0.00	0.00	11,379.0	4,904.6	-439.4	461,726.20	653,191.90	32° 16' 6.347 N	103° 50' 15.759 W

Formations

Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)
296.5	296.5	Rustler			
611.5	611.5	Top Salt*			
3,770.5	3,770.5	Base of Salt (Anhydrite)			
4,042.5	4,042.5	Bell Canyon Ss./ Delaware			
4,943.5	4,943.5	Cherry Canyon Ss.			
6,559.0	6,555.5	Brushy Canyon Ss.			
7,887.1	7,880.5	Bone Spring Lm.			
7,964.3	7,957.5	Avalon Ss.			
8,211.9	8,204.5	Bone Spg. Upper Avalon Lm.			
8,797.3	8,788.5	Bone Spg. Lower Avalon Lm.			
8,917.6	8,908.5	1st Bone Spring Ss.			
9,418.8	9,408.5	2nd Bone Spring Carb.			
9,800.7	9,789.5	2nd Bone Spring Ss.			
10,085.3	10,073.5	3rd Bone Spring Carb.			
10,850.2	10,836.5	3rd Bone Spring Ss.			
11,076.0	11,053.5	War Wink Ss.			
11,232.4	11,183.5	Red Hills Ss.			
11,367.2	11,273.5	Wolfcamp Sh			
11,403.5	11,293.5	Wolfcamp X Sd			
11,532.9	11,348.5	Wolfcamp Y Sd			



Well Planning Report



Database: EDM 5000.1 Single User Db
Company: XTO ENERGY, INC.
Project: Eddy County, NM
Site: Sec 36, T23S, R30E
Well: Los Medanos 36-23-30 State #112H
Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference: Well Los Medanos 36-23-30 State #112H
TVD Reference: RKB @ 3428.5usft (Trinidad #445)
MD Reference: RKB @ 3428.5usft (Trinidad #445)
North Reference: True
Survey Calculation Method: Minimum Curvature

Plan Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
5,000.0	5,000.0	0.0	0.0	Build 3°/100'
5,131.5	5,131.4	-1.1	-4.4	EOB @ 3.95° Inc / 255.63° Azm
10,811.3	10,797.7	-98.1	-383.1	Build 10°/100'
11,720.9	11,379.0	474.6	-423.9	EOC @ 90.00° Inc / 359.80° Azm / 11379.0' TVD
16,150.9	11,379.0	4,904.6	-439.4	TD @ 16150.9' MD / 11379.0' TVD

Sec 36, T23S, R30E
Los Medanos 36-23-30 State #112H
Q180*** & WT-180***
Design #1

Company Name: XTO ENERGY, INC.
Los Medanos 36-23-30 State #112H
Eddy County, NM
Rig: Trinidad #445
Created by: Chase Chambers
Date: 13:28, August 08 2018

PROJECT DETAILS: Eddy County, NM

Geodetic System: US State Plane 1927 (Exact solution)
Datum: NAD 1927 (NADCON CONUS)
Ellipsoid: Clarke 1886
Zone: New Mexico East 3001
System Datum: Mean Sea Level

WELL DETAILS: Los Medanos 36-23-30 State #112H

Ground Level: 3412.0





+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
0.0	0.0	456823.70	653654.00	32° 15' 17.811 N	103° 50' 10.641 W

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Diag	TFace	VSeal	Annotation
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	5000.0	0.00	0.00	5000.0	0.0	0.0	0.00	0.00	0.0	Build 3"/100'
3	5131.5	3.95	255.63	5131.4	-1.1	-4.4	3.00	255.63	-0.7	EOB @ 3.95° Inc / 255.63° Azm
4	10811.3	3.95	255.63	10797.7	-98.1	-383.1	0.00	0.00	-83.6	Build 10"/100'
5	11720.9	90.00	359.80	11379.0	474.6	-423.9	10.00	104.14	510.5	EOC @ 90.00° Inc / 359.80° Azm / 11379.0' TVD
6	16150.9	90.00	359.80	11379.0	4904.6	-439.4	0.00	0.00	4924.2	TD @ 16150.9' MD / 11379.0' TVD

DESIGN TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
FTP - LM 112H	11379.0	0.5	-422.3	456822.20	653231.70	32° 15' 17.815 N	103° 50' 15.559 W
LTP - LM 112H	11379.0	4854.6	-439.1	461676.20	653192.40	32° 16' 5.852 N	103° 50' 15.756 W
PBHL - LM 112H	11379.0	4904.6	-439.4	461726.20	653191.90	32° 16' 6.347 N	103° 50' 15.759 W

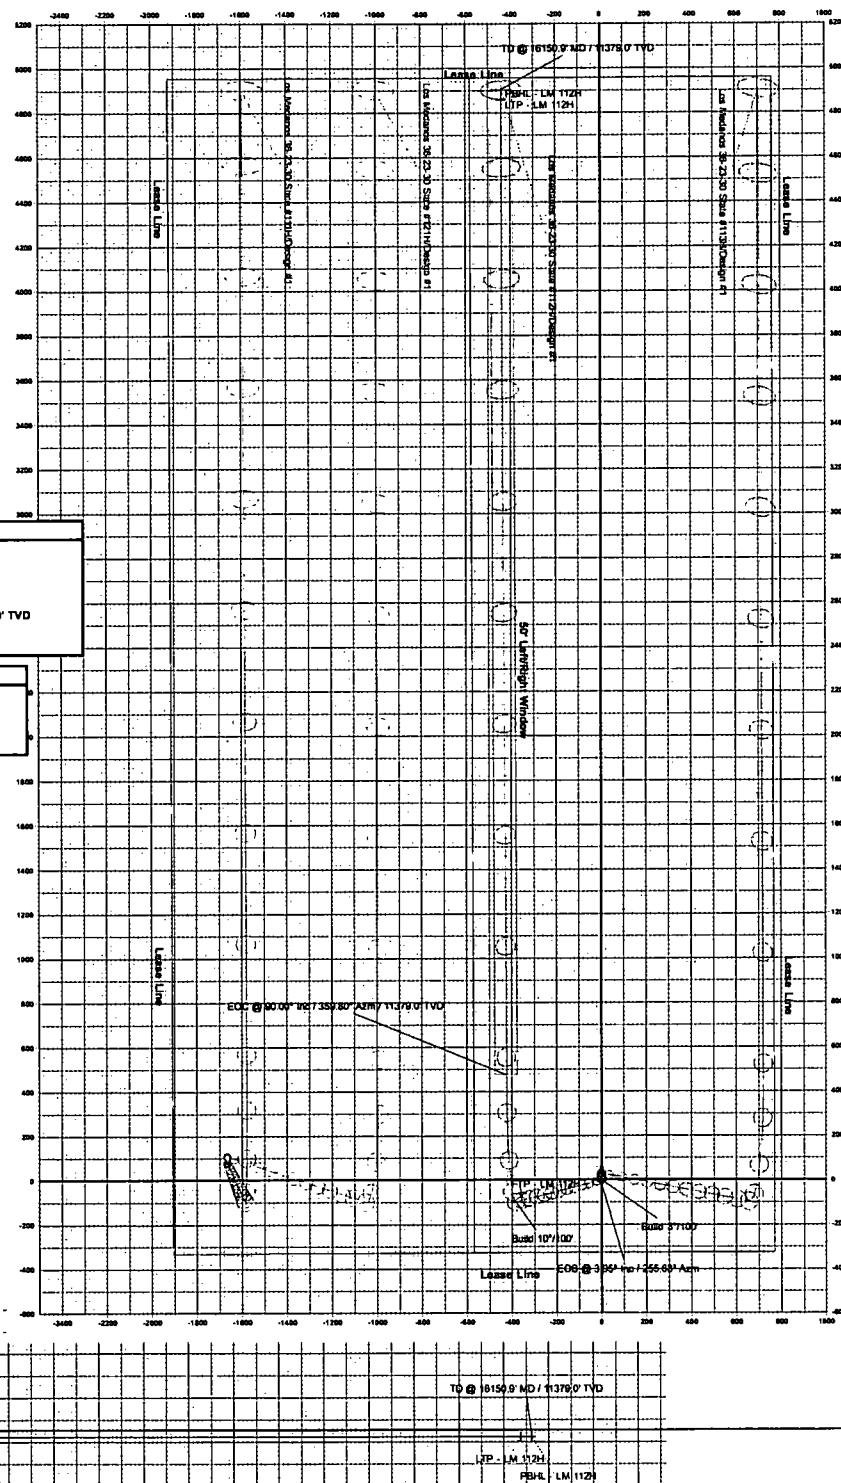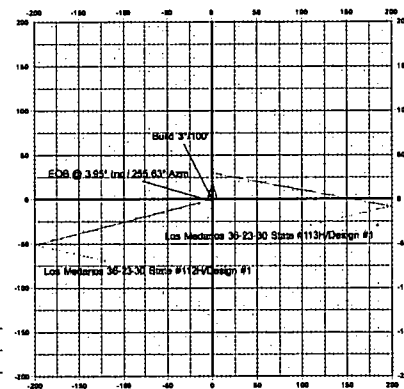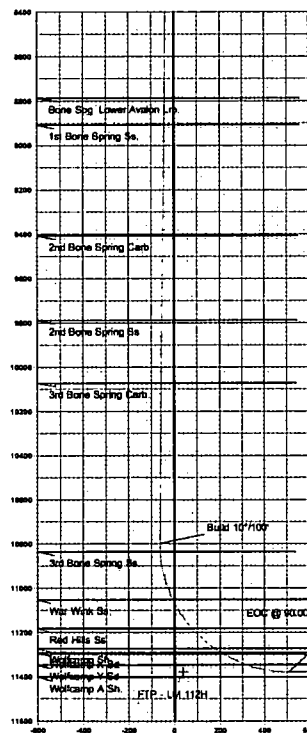

Vertical Section at 354.88° (200 usf/in)