Form 3160-5; (June 2015)

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

OCD Artesia

FORM APPROVED OMB NO. 1004-0137

Expires: January 31, 2
Lease Serial No.
NMLC029387B

SUNDRY N	OTICES AND REPORTS ON WELLS	
Do not use this	form for proposals to drill or to re-enter an	
abandoned well.	Use form 3160-3 (APD) for such proposals	١.

6. If Indian, Allottee or Tribe Name

abandoned wei	i. Use form 3160-3 (APD	i for such proposals	5. 		,	
SUBMIT IN 1	RIPLICATE - Other instr	uctions on page 2			7. If Unit or CA/Agreen	nent, Name and/or No.
1. Type of Well Gas Well Gas Well Oth	er				8. Well Name and No. SHUGART WEST	19 FEDERAL 10
Name of Operator MARATHON OIL PERMIAN L		MELISSA SZUDERA marathonoil.om			9. API Well No. 30-015-30946-00)-S1
3a. Address 5555 SAN FELIPE ST HOUSTON, TX 77056		10. Field and Pool or E SHUGART	xploratory Area			
4. Location of Well (Footage, Sec., T.	, R., M., or Survey Description)				11. County or Parish, S	tate
Sec 19 T18S R31E NWNW 99		EDDY COUNTY	, NM			
12. CHECK THE AF	PROPRIATE BOX(ES)	O INDICATE NAT	URE OF	NOTICE,	REPORT, OR OTH	ER DATA
TYPE OF SUBMISSION		<u>. </u>	YPE OF	ACTION		
Notice of Intent ■ Notice of Intent Notice of Inten	☐ Acidize	Deepen		☐ Producti	on (Start/Resume)	■ Water Shut-Off
_	☐ Alter Casing	Hydraulic Fra	cturing	☐ Reclama	ation	■ Well Integrity
☐ Subsequent Report	□ Casing Repair	■ New Construct	ction	☐ Recomp	lete	Other
☐ Final Abandonment Notice	□ Change Plans	Plug and Aba	ndon	☐ Tempora	arily Abandon	
	Convert to Injection	Plug Back		☐ Water D	isposal	
Attach the Bond under which the wor following completion of the involved testing has been completed. Final Ah determined that the site is ready for fill P.S. 35sx 4.375° - 4.275° Ta. 2) P.S. 35sx 9,956° - 3,850° Te. 3) P.S. 40sx 2,869° - 2,769° Ta. 4) P.S. 35sx 1,976° - 4,876° L. 5) P.S. 40sx 810° - 710° Tag. 6. P.S. 100° - Surf 25sx. Verify P&A mud between all plugs. Closed loop. All fluids to licensed facility.	operations. If the operation responded must be file in all inspection. 9.4225-4460 (39.2739) 9.2739 RECEIVED	alts in a multiple completion only after all requirements of the sel. DVT) Clared Completion of the sel. DVT) Clared Completion of the selection of the selecti	on or reconnus, including the CI ss C. 22 Ca years	npletion in a nagreclamation BP @ cont nt free Top Be	new interval, a Form 3160, have been completed an TEOO, SAI, Covers Toom 5830—one Springs, and dry	the le
	Lieud Ollic Oddilliosion #4	OIL PERMIAN LLC, s	sent to the (INNEY or	Carlsbad n 08/24/2018	•	
Signature (Electronic S	Submission)	Date	08/23/20	18		
	THIS SPACE FO	R FEDERAL OR S	TATE C	FFICE US	SE	
Approved By Amas	R. James_	Title	Sup	v. Ab	(T	9-9-18 Date
Conditions of approval, if any, are attache certify that the applicant holds legal or equivalent would entitle the applicant to condu-	nitable title to those rights in the act operations thereon.	subject lease Office	Car	Isba	of PIEIL	011/16
Title 18 U.S.C. Section 1001 and Title 43	U.S.C. Section 1212, make it a c	rime for any person know	ingly and v	villfully to ma	ike to any department or a	agency of the United

Wellbore Diagram

Leose & Well to. West Shugart Federal 19-110 Fie<u>ld Name</u> Soligari

Logation FWt, Sec. 15, T185, R31E

Status Active County & State Lea County, NM AF No. 30-015-30946-00-00

Wed intermation					
Sp.id:	2/05/00				
Completed					

Ground Elevation

, JI 16

3,627 XB En varion: 3,639

97 Tievation: 3,638 Total Genth 8,390

Charles Carry

e Quta		17/2" 13/ csg			159	585 SX C-27		
Surface		7 (S)				and a substitution]760	
late sire	Depth	Size (00)	Weight	Grada	le Crit	Farranterits		
17-17-17/2	vei	13.3/8"			385 15]	
	ا اس و المعارف ما والما				100		7	
Hine size	Cesta	iles (UD)	Neku	lu ada	. So. Crest	Comments]	
Production.	8: 2819	8 MR 8 %	32 tm	- 55	750 %	20	.]	
Hide also	Death	Sice (DD)	Welste	Grade	\$4. Citt	Comments]	
24/	4453	11	11/155	135	1 0501 **	FW T at 205 sts	7	

Dauding Fulular (Top to Blen).

143 to 27/6" N-80, 27/8" s 2 1/7" 1AC, 20 to 27/8" N-80, 5/07/8368 H), 2 7/8" PS, 2 7/8" NO

1.1727 x 241 PR, FOLMS, 130-1-25 FB, R4-1 - Surien Rr 35 - G4/7/RT Sucket Folds, 11-1-25 K-04rs, 2-1727 x 3747 x 3747 x 37 FMPC shear

Well History

Drig fig Recorded Shown throats handstone (Shown 1700, 20, 7760-50, 7800-10, 7870-7910) 2/23/2000

Deri 5.3, Octo 8157-8192 w/2 spi 120 deg prose 0.4717 And se w/4000 gais 11/5 PCI, w/128 PS - Poor Seat Results 3/9/2000

Pump 2009 gale SA HOL, a get inn biter. 2 got Miffe, 3 get foaming agent and with succeeding 100 get mother all 2/9/2002

25 gpt matur- 35 wint w/125 (3):152 1400 // Put wet na pump 15 50/0.

MIRQ B. Services, Free B.S. Gold, 115 Edds VL Gr. Ped 17 8 born & 4600 ps.g. Feet C 5 ppg. If page cont 20/40 sell di-4/11/2000

\$4.200 # 20/40 Sand W/940 His Xs Call/ 159-2023

4/16/2003 Fig well on party 120 BUHUI.

Femilia Sissip: 7752-60. Break Down Commotion Plante 9.5 hpm & \$100 ppig 72 hb tr (GP) 1603 i release c'ar circ out oil and gas 37/31/7003

7 m/ B S SVE 7696 7704, BD 9 S 664 使 S070 / Set CIBN 使 7740 / From B S 15 W/123,000# 20740 Sind XI Eurate

IN NO 1970 Big. (AN) Out CIBP of Iting From Strict, Co. ling Benefit rings 15 and Only production 2/16/2002

no teg, four a bowin thg. (i) to bezelon (ID) in

from the

15t Stage 315 SX, TOC?

B/SaH 1771

[CM] :qu[Q10

Auster 515 17an 2164. Over 3/14 Salidir ties 4328 State De 1 4410 tane String 5790 Bur⇔ ;;

AE D Water-

Strawn Acria

discorpings 35-0 7696 7708 7695 BB water Frac

7352-60 7725 M. 7'60 <u> Parateiras SS C</u>

3.3 w/Water - did not frag

Proposed Bonesprings

7874 EJ

Bonesprone Donarie 11201 8152-99 BD w/ Asid 2+

trar

MAVERICK WELL PLUGGERS

COMPANY: Murathon Oil PermianLLC


WELL NAME: Shugart West 19 Fold

WELL #: 10

COUNTY: Eddy

LEASE ID:

	SURFACE CAS	UNG	
OD WT	/FT GRADE	SETAT	·
15 78" 95		777	10C
	INTERMEDIATE C	1760	
OD WT	ICT LINE DIATE U	ASING	
15/11 7	FT GRADE	SETAT	TOC
CA - C		7910	1
	PRODUCTION CA	SINO	
OD WT/	ET CONTON		
C 1/2" 18	FT GRADE	ŞET AT	10C
15	3/17	4365	
	TUBING	1 000	L
OD Wil			
	FT GRADE	SET AT	TAC
		-L	i

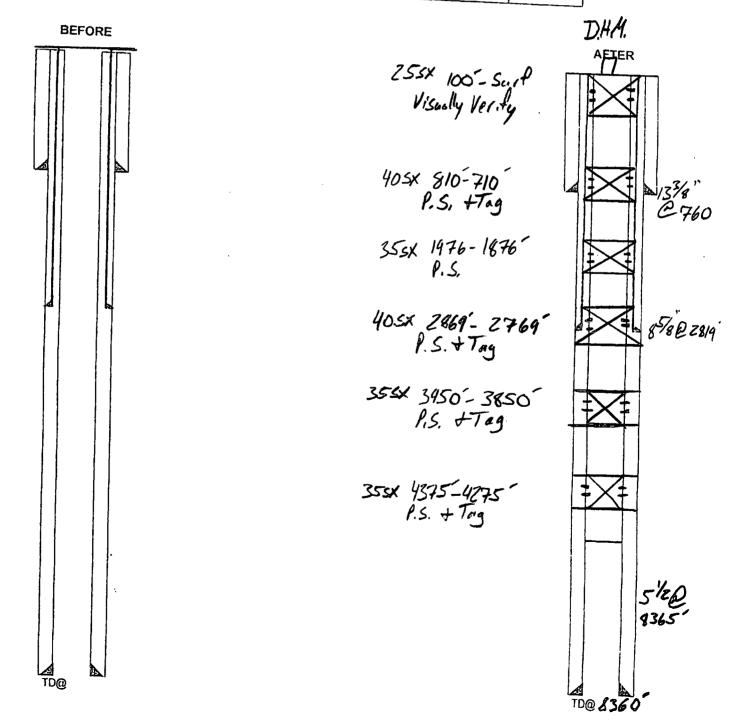

BUREAU OF LAND MANAGEMENT Carlsbad Field Office 620 East Greene Street Carlsbad, New Mexico 88220 575-234-5972

Permanent Abandonment of Federal Wells Conditions of Approval (LPC Habitat)

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within <u>ninety (90)</u> days from the approval date of this Notice of Intent to Abandon.

If you are unable to plug the well by the 90th day provide this office, prior to the 90th day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.

The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.

- 2. <u>Notification:</u> Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Eddy County, call 575-361-2822; Lea County, call 575-393-3612.
- 3. <u>Blowout Preventers</u>: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.
- 4. <u>Mud Requirement:</u> Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of brime water. Minimum nine (9) pounds per gallon.
- 5. <u>Cement Requirement</u>: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. Before pumping or bailing cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

6. Below Ground Level Cap (Lesser Prairie-Chicken Habitat): All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The BLM is to be notified a minimum of 4 hours prior to the wellhead being cut off to verify that cement is to surface in the casing and all annuluses. Wellhead cut off shall commence within ten (10) calendar days of the well being plugged. If the cut off cannot be done by the 10th day, the BLM is to be contacted with justification to receive an extension for completing the cut off. Upon the plugging and subsequent abandonment of wells that are located in lesser prairie-chicken habitat, the casings shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The well bore shall then be covered with a metal plate at least ¼ inch thick and welded in place. A weep hole shall be left in the plate and/or casing.

NMOCD also requires the operator to notify NMOCD when this type of dry hole marker is used. This can be done on the subsequent report of abandonment which is submitted to the BLM after the well is plugged. State that a below ground cap was installed as required in the COA's from the BLM.

- 7. <u>Subsequent Plugging Reporting:</u> Within 30 days after plugging work is completed, file one original and three copies of the Subsequent Report of Abandonment, Form 3160-5 to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. <u>Show date well was plugged.</u>
- 8. <u>Trash:</u> All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration will be required. See attached reclamation objectives.

<u>Timing Limitation Stipulation/ Condition of Approval for Lesser Prairie-Chicken:</u>
From March 1st through June 15th annually, abandonment activities will be allowed except between the hours from 3:00 am and 9:00 am. Normal vehicle use on existing roads will not be restricted