Form 3160-5 (June 2015)

UNITED STATES DEPARTMENT OF THE INTERIOR

FORM APPROVE	D
OMB NO. 1004-01	37
Expires: January 31, 2	2018

DE DI		<u>L</u>	Expires: Ja	nuary 31, 2018				
BUREAU OF LAND MANAGEMENT SUNDRY NOTICES AND REPORTS ON WELLS					5. Lease Serial No. NMNM100549			
Do not use thi abandoned wel		6. If Indian, Allottee or Tribe Name						
SUBMIT IN	7. If Unit or CA/Agreement, Name and/or No.							
Type of Well Oil Well	ner				8. Well Name and No. Multiple—See Atta			
Name of Operator CHEVRON USA INCORPORA	Contact: ATED E-Mail: LBECERR		ttached 30.015-451					
3a. Address 6301 DEAUVILLE BLVD MIDLAND, TX 79706	3b. Phone No. Ph: 432-68	(include area code) 7-7665		10. Field and Pool or Exploratory Area PURPLE SAGE-WOLFCAMP (GAS)				
4. Location of Well (Footage, Sec., T)			11. County or Parish, State				
MultipleSee Attached	* * * • •	· · · ·	EDDY COUNTY, NM					
Carlsb	ad Field Of	Tice						
12. CHECK THE	PPRAFTESIA)	TO INDICA	TE NATURE O	F NOTICE, F	REPORT, OR OTI	HER DATA		
TYPE OF SUBMISSION			TYPE OF	FACTION				
■ Notice of Intent	☐ Acidize	☐ Dee	en	☐ Production	on (Start/Resume)	☐ Water Shut-Off		
	☐ Alter Casing	☐ Hyd	raulic Fracturing	☐ Reclamate	ion	■ Well Integrity		
☐ Subsequent Report	☐ Subsequent Report ☐ Casing Repair			□ Recomplete		☑ Other		
☐ Final Abandonment Notice ☐ Change Pla		Plug	and Abandon	☐ Temporarily Abandon ☐ Water Disposal		Change to Original A PD		
	Convert to Injection		Back					
If the proposal is to deepen direction: Attach the Bond under which the wo following completion of the involved testing has been completed. Final Al determined that the site is ready for f We are requesting a variance The drilling rig is estimated to	rk will be performed or provide to operations. If the operation re bandonment Notices must be fil inal inspection. to the original APD to use	the Bond No. or sults in a multipled only after all the spudder	file with BLM/BIA e completion or reco equirements, includ rig to pre-set su	a. Required subsompletion in a ne ling reclamation, arface casing.	equent reports must be w interval, a Form 316 have been completed	e filed within 30 days 50-4 must be filed once and the operator has		
This request applies to the following	•			G	cepted for record	1-18 NMOCD		
HH SO 8 5 FED 003 1H - 30- HH SO 8 5 FED 003 2H - 30-	Al	CEIVED	Acc					
HH SO 8 5 FED 003 3H - 30-0 HH SO 8 5 FED 003 4H - 30-0 HH SO 8 5 FED 003 5H - 30-0	015-45117 015-45118	SF	P 1. 2 2018		SEE ATTA	CHED FOR OF APPROVAL		
HH SO 8 5 FED 003 6H - 30-0				an CC	NDITIONS	Or Aller		
		DISTRICT	II-ARTESIA O.	G.D.				
14. I hereby certify that the foregoing is	Electronic Submission #	432040 verifie	by the BLM We	II Information	System			
Con	For CHEVRON I nmitted to AFMSS for proc		RATED, sent to to CILLA PEREZ of		18PP2527SE)			
Name (Printed/Typed) LAURA B				TTING SPEC	-	· · · · · · · · · · · · · · · · · · ·		
Signature (Electronic S	Submission)		Date 08/21/2	018				
	THIS SPACE FO	OR FEDERA	L OR STATE	OFFICE US	E			
_Approved_By_ZQTA_STEVENS			TitlePETROLE	UM ENGINE	ER	Date 09/10/2018		
Conditions of approval, if any, are attache certify that the applicant holds legal or equ which would entitle the applicant to condu	uitable title to those rights in the	not warrant or e subject lease	Office Carlsba	d				

Additional data for EC transaction #432040 that would not fit on the form

Wells/Facilities, continued

Agreement NMNM100549	Lease NMNM100549	Well/Fac Name, Number HH SO 8 5 FED 003 1H	API Number 30-015-45115-00-X1	Location Sec 17 T26
NMNM100549	NMNM100549	HH SO 8 5 FED 003 2H	30-015-45116-00-X1	32.048035 Sec 17 T26 32.048103
NMNM100549	NMNM100549	HH SO 8 5 FED 003 3H	30-015-45117-00-X1	Sec 17 T26 32.048172
NMNM100549	NMNM100549	HH SO 8 5 FED 003 4H	30-015-45118-00-X1	Sec 17 T26
NMNM100549	NMNM100549	HH SO 8 5 FED 003 5H	30-015-45119-00-X1	Sec 17 T26 32.048309
NMNM100549	NMNM100549	HH SO 8 5 FED 003 6H	30-015-45120-00-X1	Sec 17 T26

Location
Sec 17 T26S R27E NENW 629FNL 2308FWL 32.048035 N Lat, 104.213425 W Lon Sec 17 T26S R27E NENW 604FNL 2308FWL 32.048103 N Lat, 104.213425 W Lon Sec 17 T26S R27E NENW 579FNL 2309FWL 32.048172 N Lat, 104.213425 W Lon Sec 17 T26S R27E NENW 554FNL 2309FWL 32.048241 N Lat, 104.213425 W Lon Sec 17 T26S R27E NENW 529FNL 2310FWL 32.048241 N Lat, 104.213425 W Lon Sec 17 T26S R27E NENW 529FNL 2310FWL 32.048309 N Lat, 104.213417 W Lon Sec 17 T26S R27E NENW 504FNL 2310FWL 32.048378 N Lat, 104.213417 W Lon

32. Additional remarks, continued

See attachments for detailed program and rig layout.

Chevron U.S.A. Inc. (CUSA) SUNDRY ATTACHMENT: SPUDDER RIG

DATA OPERATOR NAME: Chevron U.S.A. Inc.

1. SUMMARY OF REQUEST:

CUSA respectfully requests approval for the following operations for the surface hole in the drill plan:


1. Utilize a spudder rig to pre-set surface casing for time and cost savings.

2. Description of Operations

- 1. Spudder rig will move in to drill the surface hole and pre-set surface casing on the well.
 - a. After drilling the surface hole section, the spudder rig will run casing and cement following all the applicable rules and regulations (OnShore Order 2, all COAs and NMOCD regulations).
 - b. The spudder rig will utilize fresh water-based mud to drill the surface hole to TD. Solids control will be handled entirely on a closed loop basis. No earth pits will be used.
- 2. The wellhead will be installed and then tested offline after the WOC time has been reached.
- 3. An abandonment cap at the same pressure rating as the wellhead will be installed to seal the wellbore. Pressure will be monitored with needle valves installed on one wing-valve.
 - a. A means for intervention will be maintained while the drilling rig is not over the well.
- 4. Spudder rig operations are expected to take 2-3 days per well on the pad.
- 5. The BLM will be contacted and notified 24 hours prior to commencing spudder rig operations.
- 6. Drilling operations will begin with a larger rig and a BOP stack equal to or greater than the pressure rating that was permitted will be nippled up and tested on the wellhead before drilling operations resume on each well.
 - a. The larger rig will move back onto the location within 90 days from the point at which the wells are secured and the spudder rig is moved off location.
 - **b.** The BLM will be contacted / notified 24 hours before the larger rig moves back on the pre-set locations.
- 7. CUSA will have supervision on the rig to ensure compliance with all BLM and NMOCD regulations and to oversee operations.
- 8. Once the rig is removed, CUSA will secure the wellhead area by placing a guard rail around the cellar area.

Pad Name	Well No.	Surface	Surface Rig	Surface Rig Duration	Larger Dev Rig Spud	Well	Days Between	APD	APD	
SD EA 18 19 FED P14	12H – 15H	Rig Start 5/4/2018	Finish 5/12/2018	(Days) 8	3/25/2019	Status SI	Rigs 317	10/11/2017	Expires 10/11/2019	Lease Status Held by production by existing producing wells
SD EA 18 19 FED COM P13	8H – 11H	5/12/2018	5/20/2018	8	2/22/2019	SI	278	9/28/2017	9/28/2019	Held by production by existing producing wells
SD EA 29 32 FED COM P10	17H – 20H	5/20/2018	5/28/2018	8	10/4/2018	SI	129	2/8/2018	2/8/2020	Held by production by existing producing wells
SD EA 29 32 FED COM P11	13H – 16H	5/28/2018	6/5/2018	8	11/6/2018	SI	154	12/20/2017	12/20/2019	Held by production by existing producing wells

Surface Rig Layout

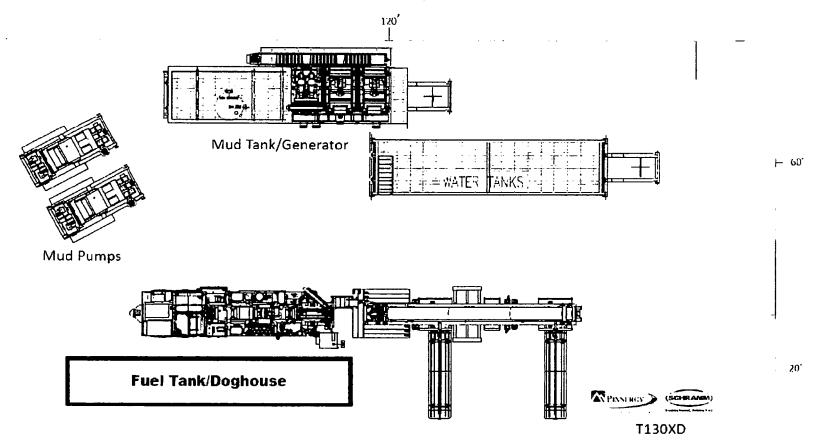

PECOS DISTRICT CONDITIONS OF APPROVAL

OPERATOR'S NAME: | C

Chevron USA Incorporated

LEASE NO.:

NMNM118108

WELL NAME & NO.:

HH SO 8 5 Fed 003 Multi-Wells Pad

SURFACE HOLE FOOTAGE: BOTTOM HOLE FOOTAGE

LOCATION: | Section 17, T.26 S., R.27 E., NMPM

COUNTY: | Eddy County, New Mexico

All COAs still apply expect the following:

- 1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. Operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as 2nd Rig is rigged up on well.

ZS 091018