

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

OCD Artesia

FORM APPROVED
OMB NO. 1004-0137
Expires: January 31, 2018**SUNDRY NOTICES AND REPORTS ON WELLS**
*Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.*5. Lease Serial No.
NMNM0557142

6. If Indian, Allottee or Tribe Name

SUBMIT IN TRIPLICATE - Other instructions on page 27. If Unit or CA/Agreement, Name and/or No.
NMNM106872

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other8. Well Name and No.
ROSS EG FED 72. Name of Operator
EOG Y RESOURCES INCContact: TINA HUERTA
E-Mail: tina_huerta@eogresources.com9. API Well No.
30-015-26945-00-C23a. Address
104 S 4TH STREET
ARTESIA, NM 882103b. Phone No. (include area code)
Ph: 575-748-416810. Field and Pool or Exploratory Area
CEMETARY

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

Sec 20 T19S R25E SENW 1980FNL 1980FWL

FEB 08 2019

11. County or Parish, State
EDDY COUNTY, NM

RECEIVED

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Hydraulic Fracturing	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input checked="" type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleting horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleting in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.

EOG Y Resources, Inc. plans to plug and abandon this well as follows:

- MIRU all safety equipment as needed. POOH with production equipment.
- RIH with 7 inch GR/JB to 6100 ft. RIH with 4-1/2 inch GR/JB to 9034 ft.
- Set a CIBP at 9034 ft with 35 ft Class H cement on top. *Dump or spot 25 sx.*
- Spot a 25 sx Class H cement plug from 7354 ft - 7677 ft. WOC and tag plug. This will plug the Canyon. *7721 - 7577 (min.)*
- Set a CIBP at 6100 ft with 35 ft cement on top. This will plug the open Wolfcamp perforations. *Dump Bail or spot 25 sx.*
- Spot a 25 sx Class H cement plug from 3628 ft - 3770 ft. WOC and tag plug. This will plug the Bone Spring. *Add Alag. from 5820 - 5484. To DVT & T/WC.*
- Spot a 25 sx Class H cement plug from 2150 ft - 2292 ft. WOC and tag plug. This will plug the Gorieta.

GC 2/19/19
Accepted for record - NMOCDSEE ATTACHED FOR
CONDITIONS OF APPROVALENTERED
Feb 2-12-19

14. I hereby certify that the foregoing is true and correct.

Electronic Submission #448781 verified by the BLM Well Information System
For EOG Y RESOURCES INC, sent to the Carlsbad
Committed to AFMSS for processing by PRISCILLA PEREZ on 01/07/2019 (19PP0698SE)

Name (Printed/Typed) TINA HUERTA

Title REGULATORY SPECIALIST

Signature (Electronic Submission)

Date 12/21/2018

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED **

Additional data for EC transaction #448781 that would not fit on the form

32. Additional remarks, continued

8. Perforate at 1201 ft. Attempt to establish circulation. Spot a 25 sx Class C cement plug from 1059 ft - 1201 ft. WOC and tag plug. This will plug the 9-5/8 inch casing shoe.
9. Spot a 25 sx Class C cement plug from 638 ft - 780 ft. WOC and tag plug. This will plug the San Andres.
10. Spot a 10 sx Class C cement plug from 57 ft up to surface. This will plug up to the surface.
11. Cut off wellhead and install dry hole marker. Clean location as per regulated.

Wellbore schematics attached

*Pect is optional
Not Required*

ROSS EG Federal Com #7

12/21/2019

COMMENTS

14 3/4 hole

1151


8 3/4 hole

DVT @ 5770

Wolfcamp
Perforations 6112 - 6184

Canyon
Perforations 7800 - 7904
Squeezed

Morrow
Perforations 9084 - 9124

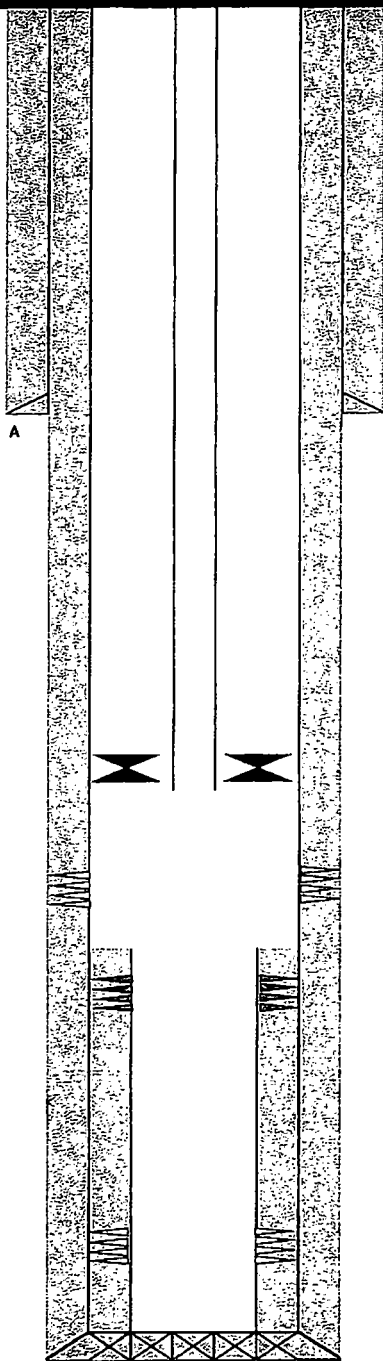

PGTD 9,320 MD
ID 9,420 MD

Tubing

#	Joints	Description	Length FT	OD in	ID in	Grade	Wt (lb/ft)	Top (ftKB)	Blm (ftKB)
1	0	KB							18.80
2	196	2.875" L-80	5908.53	2.875	2.441	L-80	6.5	18.80	5,927.13
3	1	On/off tool	17.875	5.875	3.25			5,927.13	5,945.00
4	1	Packer	10.00	5.875	2.5			5,945.00	5,955.00

Formation	Top
San Anders	730
Glorieta	2242
Bone Springs	3720
Wolfcamp	5536
Canyon	7627
Morrow	9084

CASING DETAIL

#	SIZE	WGHT	GRADE	THREAD	Top	Bottom	CMT SXS	CMT TOP	
A	9 5/8	36	J-55		0	1,151	1280	0	1" set
B	7	23	J-55		0	8,300	1800	0	
C	4 1/2	11.6	P-110		7671	9320	200	7871	

Prepared by: MJM

ROSS EG Federal Com #7


Proposed P&A

COMMENTS

Wolfcamp
Perforations 6112 - 6184

Perforations 7800 - 7904
Squeezed

Morrow
Perforations 9084 - 9124

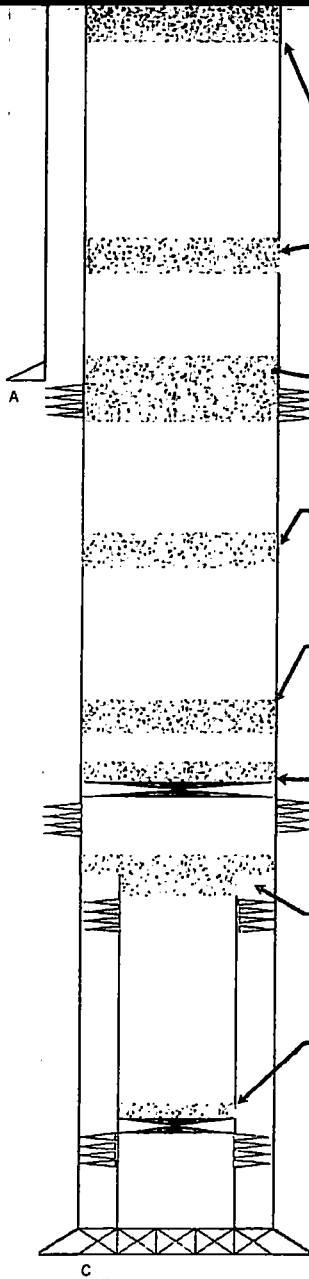

Spot a 10 SX (57 ft) CLS C cement plug 0 ft - 57 ft. WOC & Tag Plug. This will plug the Top.

Spot a 25 SX (142 ft) CLS C cement plug 638 ft - 780 ft. WOC & Tag Plug. This will plug the San Anders.

Perforate at 1201 ft. Attempt to establish Circulation. Spot a 25 SX (142 ft) CLS C cement plug 1059 ft - 1201 ft. WOC & Tag Plug. This will plug the 9.625 inch casing shoe.

Spot a 25 SX (142 ft) CLS C or H cement plug 2150 ft - 2292 ft. WOC & Tag Plug. This will plug the Glorieta.

Spot a 25 SX (142 ft) CLS C or H cement plug 3628 ft - 3770 ft. WOC & Tag Plug. This will plug the Bone Springs.

Set CIBP at 6100 ft with 35 ft of CLS C or H on top. This will plug the open Wolfcamp perforations.

Spot a 25 SX (323 ft) CLS H cement plug 7354 ft - 7677 ft. WOC & Tag Plug. This will plug the Canyon.

Set CIBP at 9034 ft with 35 ft of CLS H on top.

Formation	Top
San Anders	730
Glorieta	2242
Bone Springs	3720
Wolfcamp	5536
Canyon	7627
Morrow	9084

CASING DETAIL

#	SIZE	WGHT	GRADE	THREAD	Top	Bottom	CMT SXS	CMT TOP
A	9 5/8	36	J-55		0	1,151	1280	0
B	7	22	J-55		0	8,300	1800	0
C	4 1/2	11.6	P-110		7671	9320	200	7671

Prepared by: MJM

9,320 MD
9,420 MD

**BUREAU OF LAND MANAGEMENT
Carlsbad Field Office
620 East Greene Street
Carlsbad, New Mexico 88220
575-234-5972**

**Permanent Abandonment of Federal Wells
Conditions of Approval**

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within ninety (90) days from the approval date of this Notice of Intent to Abandon.

If you are unable to plug the well by the 90th day provide this office, prior to the 90th day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.

The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.

2. **Notification:** Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Eddy County, call 575-361-2822; Lea County, call 575-393-3612.

3. **Blowout Preventers:** A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.

4. **Mud Requirement:** Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of **brine** water. Minimum nine (9) pounds per gallon.

5. **Cement Requirement:** Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. **Before pumping or bailing cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.**

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

6. Dry Hole Marker: All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). **The BLM is to be notified a minimum of 4 hours prior to the wellhead being cut off to verify that cement is to surface in the casing and all annuluses. Wellhead cut off shall commence within ten (10) calendar days of the well being plugged. If the cut off cannot be done by the 10th day, the BLM is to be contacted with justification to receive an extension for completing the cut off.**

The well bore shall then be capped with a 4-inch pipe, 10-feet in length, 4 feet above ground and embedded in cement, unless otherwise noted in COA (requirements will be attached). The following information shall be permanently inscribed on the dry hole marker: well name and number, name of the operator, lease serial number, surveyed location (quarter-quarter section, section, township and range or other authorized survey designation acceptable to the authorized officer such as metes and bounds).

7. Subsequent Plugging Reporting: Within 30 days after plugging work is completed, file one original and three copies of the Subsequent Report of Abandonment, Form 3160-5 to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. **Show date well was plugged.**

8. Trash: All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration will be required. See attached reclamation objectives.