OCD Artesia

UNITED STATES

DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

5. Lease Serial No. NMNM0384625

FORM APPROVED OMB NO. 1004-0137 Expires: January 31, 2018

SUNDKY N	UTICES AND	J KEPUK 15	ON WELLS
Do not use this	form for prop	osals to drill	or to re-enter an
abandoned well.	Use form 310	60-3 (APD) fo	r such proposals

abandoned well. Use form 3160-3 (APD) for such proposals.				6. If Indian, Allottee or Tribe Name		
SUBMIT IN T	7. If Unit or CA/Agreement, Name and/or No. SW342					
Type of Well Oil Well		8. Well Name and No. FED IBC GAS COM 1				
Name of Operator OXY USA WTP LIMITED PTN		9. API Well No. 30-015-10788-00-S1				
3a. Address		Bb. Phone No. (include area code) Ph: 432-685-57472 NO. C.F. (ATION		10. Field and Pool or Exploratory Area INDIAN BASIN-STRAWN		
HOUSTON, TX 77210 4. Location of Well (Footage, Sec., T., R., M., or Survey Description)		ARTESIA DISTR	\	11. County or Parish, State		
Sec 29 T21S R23E NWSE		MAR 1 1 2019		EDDY COUNTY, NM		
17.	Z RECEIVED		·			
	PPROPRIATE BOX(ES) T	O INDICATE NATURE OF	F NOTICE, I	REPORT, OR OTH	ER DATA	
TYPE OF SUBMISSION		TYPE OF ACTION				
☑ Notice of Intent	☐ Acidize	□ Deepen	☐ Production	on (Start/Resume)	■ Water Shut-Off	
	□ Alter Casing	☐ Hydraulic Fracturing	☐ Reclamation		□ Well Integrity	
☐ Subsequent Report	Casing Repair	■ New Construction	□ Recompl	ete	□ Other	
☐ Final Abandonment Notice	□ Change Plans	Plug and Abandon	☐ Tempora	Temporarily Abandon		
	□ Convert to Injection	□ Plug Back	☐ Water Disposal			
determined that the site is ready for fi TD-7360' PBTD-7278' Pe 13-3/8" 48# csg @ 150' w/ 410 8-5/8" 32# csg @ 2039' w/ 17: 5-1/2" 15.5-17# csg @ 7360' v 1. RIH & set CIBP @ 6908', N 2. M&P 25sx cmt @ 5775-56: 3. M&P 25sx cmt @ 3179-30- 4. Perf @ 2089', sqz 100sx cm 5. Perf @ 1155', sqz 35sx cm 6. Perf @ 230', sqz 70sx cmt	f-Circ	SEE ATTACHED FOR CONDITIONS OF APPROVAL				
14. I hereby certify that the foregoing is Com Name (Printed/Typed) DAVID ST	56099 verified by the BLM Wel LIMITED PTNRSHIP, sent to ssing by PRISCILLA PEREZ or Title SR RE(the Carlsbad	19PP1170SE)			
	<u> </u>	30271101111				
Signature (Electronic S	Date 02/27/20	019				
	THIS SPACE FOI	R FEDERAL OR STATE (OFFICE US	E		
Approved By		ET		3-2-19 Date		
certify that the applicant holds legal or equ which would entitle the applicant to condu	Office CF	0		<u></u>		
Title 8 U.S.C Section 1001 and Title 43 States any false, fictitious or fraudulent s			willfully to mal	ke to any department or	agency of the United	

(Instructions on page 2)
** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED **



Additional data for EC transaction #456099 that would not fit on the form

32. Additional remarks, continued

10# MLF between plugs - Above ground steel tanks will be utilized

*This Intent to P&A was originally approved 11/14/17, EC Transaction 391328, Serial Number 852-68533, copy attached.

OXY USA WTP LP - Proposed Federal IBC Gas Com #1 API No. 30-015-10788

70sx @ 230' - Surface

35sx @ 1155-1035' WOC-Tag


100sx @ 2089-1768' WOC-Tag

25sx @ 3179-3049' WOC-Tag

25sx @ 5775-5610' WOC-Tag

CIBP @ 6908' w/ 25sx to 6740'

CIBP @ 7278' PB-7322'

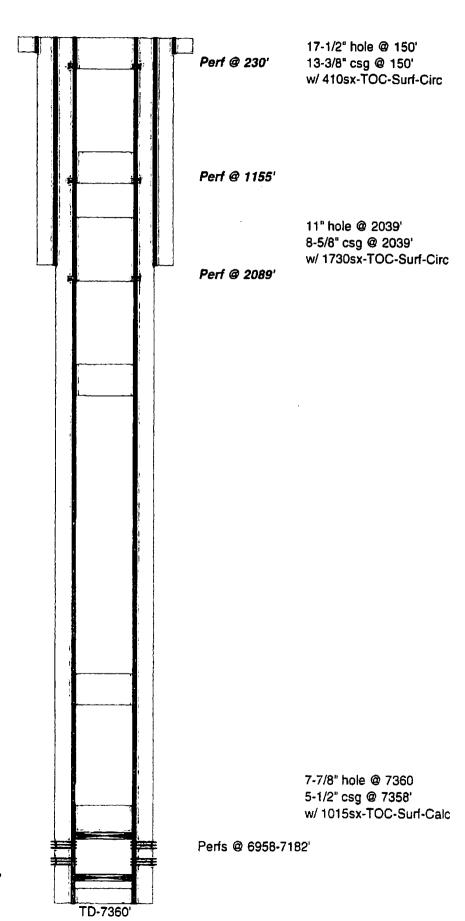

OXY USA WTP LP - Current Federal IBC Gas Com #1 API No. 30-015-10788

> CIBP @ 7278' PB-7322'

17-1/2" hole @ 150' 13-3/8" csg @ 150' w/ 410sx-TOC-Surf-Circ / 2 Stege 11" hole @ 2039' 8-5/8" csg @ 2039' w/ 1730sx-TOC-Surf-Circ 5 Stages SA 381 GL 1818 Yeso 1965 BS 3114 Basal leonard 5476 5726 Wolf Camp Cisco Cyn 6860 7-7/8" hole @ 7360 5-1/2" csg @ 7358' w/ 1015sx-TOC-Surf-Calc 7141-47 Did Not Circ Perfs @ 6958-7182' / UP 6979 TD-7360'

BUREAU OF LAND MANAGEMENT Carlsbad Field Office 620 East Greene Street Carlsbad, New Mexico 88220 575-234-5972

Permanent Abandonment of Federal Wells Conditions of Approval

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within <u>ninety (90)</u> days from the approval date of this Notice of Intent to Abandon.

If you are unable to plug the well by the 90th day provide this office, prior to the 90th day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.

The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.

- 2. <u>Notification:</u> Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Eddy County, call 575-361-2822; Lea County, call 575-393-3612.
- 3. <u>Blowout Preventers</u>: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.
- 4. <u>Mud Requirement:</u> Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of **brine** water. Minimum nine (9) pounds per gallon.
- 5. <u>Cement Requirement</u>: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. Before pumping or bailing cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

6. <u>Dry Hole Marker</u>: All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The BLM is to be notified a minimum of 4 hours prior to the wellhead being cut off to verify that cement is to surface in the casing and all annuluses. Wellhead cut off shall commence within ten (10) calendar days of the well being plugged. If the cut off cannot be done by the 10th day, the BLM is to be contacted with justification to receive an extension for completing the cut off.

The well bore shall then be capped with a 4-inch pipe, 10-feet in length, 4 feet above ground and embedded in cement, unless otherwise noted in COA (requirements will be attached). The following information shall be permanently inscribed on the dry hole marker: well name and number, name of the operator, lease serial number, surveyed location (quarter-quarter section, section, township and range or other authorized survey designation acceptable to the authorized officer such as metes and bounds).

- 7. <u>Subsequent Plugging Reporting:</u> Within 30 days after plugging work is completed, file one original and three copies of the Subsequent Report of Abandonment, Form 3160-5 to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. **Show date well was plugged.**
- 8. <u>Trash</u>: All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration will be required. See attached reclamation objectives.