


- **Tentative Return to Production Procedure Continued**
 - TAC @ 3,000'
 - (20) jts 2-7/8" J55 6.5# tbg
 - SN @ 3,650'
 - (1) 20' MSMA
 - EOT @ 3,670'
- ND BOP, set TAC, flange up WH
- RIH w/ rod design as follows:
 - (1) 26' x 1-1/2" SMPR
 - (1) 6' x 3/4" rod sub
 - (2) 8' x 3/4" rod subs
 - (138) 3/4" N97 rods
 - (7) 1-5/8" K bars
 - (1) 25-150 RHBC-20' Pump
- Please reuse as many rods as possible and pull the rest from inventory
- **PLEASE ADJUST UNIT TO 7.5 SPM**
- Hang on, load tubing and note pump action and alignment
- Clean location
- PWOP
- RDMO, TOTP

Field

Empire Glorieta-Yeso

McCoy St #4

History			
10/18/10	Spudded		
11/11/10	Completed Blinebry		
11/23/10	Hang on with 2.25" tubing pump		
7/11/11	Add Paddock Zone		
CURRENT			
Tubing Detail (top to bottom)			
Joints	Description	Footage	Depth
	KB	18	18
114	2 7/8" J55 Tubing	3,706.00	3,724.00
1	Marker Jt	2.12	3,726.12
2	2 7/8" J55 Tubing	65.04	3,791.16
	5-1/2" x 2-7/8" TAC	2.7	3,793.86
40	2 7/8" J55 Tubing	1,301.55	5,095.41
1	2-7/8" SN	1.10	5,096.51
1	Desander 2707G	19.28	5,115.79
5	2 7/8" J55 Tubing	160.50	5,276.29
1	Bull Plug	0.70	5,276.99
Rod Detail (top to bottom)			
Rods	Description	Footage	Depth
1	1-1/2" x 26' SMPR	26	26
1	1.25" FG rod sub	6	32
66	1.25" FG rods	2475	2507
96	7/8" N90 rods	2,400	4907
6	1-5/8" Grade C Sinker Bars	150	5057
	26K Shear Tool	1	5058
	2.5" x 2" x 24' RHBC	24	5082

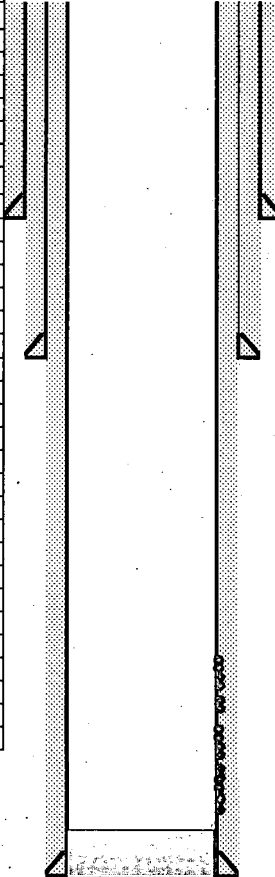

Well ID Info:	
API No:	30-015-38076
Spud Date:	10/18/2010

Csg: 13 3/8" 48# H40
 Set @ 350
 Cement w/ 400 sx Class C w/ 2% CaCl
 circ. 125sx

Csg: 8 5/8" 24# J55
 Set @ 833
 Cement w/ 200 sx 50:50:10 Class C + 200 sx Class C w/ 2 % CaCl
 circ. 83 sx

Marker Joint 3506-3521

Paddock perms 3946 - 4250' 26 holes
 U. Blinebry perms 4450 - 4650' 26 holes
 M. Blinebry perms 4720 - 4920' 26 holes
 L. Blinebry perms 4990 - 5190' 26 holes

Csg: 5 1/2" 17# J55
 Depth: 5392
 Cement w/ 500 sx 36:65:6 Class C + 400 sx 50:50:2 Class C
 circ. 67 sx

TD 5406'
 PBD 5336'

