

RECEIVED

Form 3160-3
(June 2015)

JUN 25 2019

FORM APPROVED
OMB No. 1004-0137
Expires: January 31, 2018

UNITED STATES
DEPARTMENT OF THE INTERIOR DISTRICT II-ARTESIA O.C.D.
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. NMNM060341
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other		6. If Indian, Allottee or Tribe Name
1c. Type of Completion: <input type="checkbox"/> Hydraulic Fracturing <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		7. If Unit or CA Agreement, Name and No.
2. Name of Operator PERCUSSION PETROLEUM OPERATING LLC		8. Lease Name and Well No. OSAGE BOYD 15 FEDERAL COM 19H 317253
3a. Address 919 Milam Street, Suite 2475 Houston TX 77002	3b. Phone No. (include area code) (713)589-2337	9. API Well No. 30-015-46140
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface NENW / 431 FNL / 2370 FWL / LAT 32.625604 / LONG -104.4733484 At proposed prod. zone NENW / 20 FNL / 2269 FWL / LAT 32.667986 / LONG -104.473842		10. Field and Pool, or Exploratory N. SEVEN RIVERS; GLORIETA -YESO
14. Distance in miles and direction from nearest town or post office* 14 miles		11. Sec., T. R. M. or Blk. and Survey or Area SEC 22 / T19S / R25E / NMP
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 270 feet	16. No of acres in lease 40	12. County or Parish EDDY
17. Spacing Unit dedicated to this well 160	13. State NM	
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 240 feet	19. Proposed Depth 2904 feet / 8305 feet	20. BLM/BIA Bond No. in file FED: NMB001424
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 3473 feet	22. Approximate date work will start* 12/31/2018	23. Estimated duration 30 days
24. Attachments		

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- | | |
|--|---|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification. |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be requested by the BLM. |

25. Signature (Electronic Submission)	Name (Printed/Typed) Brian Wood / Ph: (505)466-8120	Date 10/22/2018
Title President		
Approved by (Signature) (Electronic Submission)	Name (Printed/Typed) Cody Layton / Ph: (575)234-5959	Date 06/19/2019
Title Assistant Field Manager Lands & Minerals Office CARLSBAD		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

APPROVED WITH CONDITIONS
Approval Date: 06/19/2019
RUP 6-26-19

INSTRUCTIONS

GENERAL: This form is designed for submitting proposals to perform certain well operations, as indicated on Federal and Indian lands and leases for action by appropriate Federal agencies, pursuant to applicable Federal laws and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from local Federal offices.

ITEM 1: If the proposal is to redrill to the same reservoir at a different subsurface location or to a new reservoir, use this form with appropriate notations. Consult applicable Federal regulations concerning subsequent work proposals or reports on the well.

ITEM 4: Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local Federal offices for specific instructions.

ITEM 14: Needed only when location of well cannot readily be found by road from the land or lease description. A plat, or plats, separate or on the reverse side, showing the roads to, and the surveyed location of, the well, and any other required information, should be furnished when required by Federal agency offices.

ITEMS 15 AND 18: If well is to be, or has been directionally drilled, give distances for subsurface location of hole in any present or objective productive zone.

ITEM 22: Consult applicable Federal regulations, or appropriate officials, concerning approval of the proposal before operations are started.

ITEM 24: If the proposal will involve hydraulic fracturing operations, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The Privacy Act of 1974 and regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 25 U.S.C. 396; 43 CFR 3160

PRINCIPAL PURPOSES: The information will be used to: (1) process and evaluate your application for a permit to drill a new oil, gas, or service well or to reenter a plugged and abandoned well; and (2) document, for administrative use, information for the management, disposal and use of National Resource Lands and resources including (a) analyzing your proposal to discover and extract the Federal or Indian resources encountered; (b) reviewing procedures and equipment and the projected impact on the land involved; and (c) evaluating the effects of the proposed operation on the surface and subsurface water and other environmental impacts.

ROUTINE USE: Information from the record and/or the record will be transferred to appropriate Federal, State, and local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecution, in connection with congressional inquiries and for regulatory responsibilities.

EFFECT OF NOT PROVIDING INFORMATION: Filing of this application and disclosure of the information is mandatory only if you elect to initiate a drilling or reentry operation on an oil and gas lease.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to allow evaluation of the technical, safety, and environmental factors involved with drilling for oil and/or gas on Federal and Indian oil and gas leases. This information will be used to analyze and approve applications. Response to this request is mandatory only if the operator elects to initiate drilling or reentry operations on an oil and gas lease. The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Connection Clearance Officer (WO-630), 1849 C Street, N.W., Mail Stop 401 LS, Washington, D.C. 20240.

Additional Operator Remarks

Location of Well

1. SHL: NENW / 431 FNL / 2370 FWL / TWSP: 19S / RANGE: 25E / SECTION: 22 / LAT: 32.625604 / LONG: -104.4733484 (TVD: 0 feet, MD: 0 feet)
PPP: NENW / 1325 FNL / 2269 FWL / TWSP: 19S / RANGE: 25E / SECTION: 15 / LAT: 32.664539 / LONG: -104.473836 (TVD: 2914 feet, MD: 7038 feet)
BHL: NENW / 20 FNL / 2269 FWL / TWSP: 19S / RANGE: 25E / SECTION: 15 / LAT: 32.667986 / LONG: -104.473842 (TVD: 2904 feet, MD: 8305 feet)

BLM Point of Contact

Name: Tanja Baca

Title: Admin Support Assistant

Phone: 5752345940

Email: tabaca@blm.gov

Review and Appeal Rights

A person contesting a decision shall request a State Director review. This request must be filed within 20 working days of receipt of the Notice with the appropriate State Director (see 43 CFR 3165.3). The State Director review decision may be appealed to the Interior Board of Land Appeals, 801 North Quincy Street, Suite 300, Arlington, VA 22203 (see 43 CFR 3165.4). Contact the above listed Bureau of Land Management office for further information.

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME:	Percussion Petroleum Operating, LLC
LEASE NO.:	NMNM-060341
WELL NAME & NO.:	Osage Boyd 15 Federal Com 19H
SURFACE HOLE FOOTAGE:	0431' FNL & 2370' FWL
BOTTOM HOLE FOOTAGE:	0020' FNL & 2269' FWL Sec. 15, T. 19 S., R 25 E.
LOCATION:	Section 22, T. 19 S., R 25 E., NMPM
COUNTY:	County, New Mexico

Operator to run an anti-collision report due to horizontal wells in close proximity and submit to BLM prior to drilling.

Communitization Agreement

The operator will submit a Communitization Agreement to the Carlsbad Field Office, 620 E Greene St. Carlsbad, New Mexico 88220, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.

If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.

In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

A. DRILLING OPERATIONS REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

Eddy County

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,
(575) 361-2822

1. **Hydrogen Sulfide (H₂S) monitors shall be installed prior to drilling out the surface shoe. If H₂S is detected in concentrations greater than 100 ppm, the Hydrogen Sulfide area shall meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, provide measured values and formations to the BLM.**
2. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval. **If the drilling rig is removed without approval – an Incident of Non-Compliance will be written and will be a “Major” violation.**
3. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works is located, this does not include the dog house or stairway area.
4. **The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.**

B. CASING

Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.

Centralizers required on surface casing per Onshore Order 2.III.B.1.f.

Wait on cement (WOC) for Water Basin:

After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements.

Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.

No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.

Medium Cave/Karst

Possibility of water flow in the San Andres.

Possibility of lost circulation in the San Andres and Artesia Group.

Contingency Surface Casing Plan:

1. The 13-3/8 inch surface casing shall be set at approximately 400 feet and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry.**
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.

Casing Plan without Contingency:

2. The **9-5/8** inch surface casing shall be set at approximately **1279** feet and cemented to the surface (**If contingency casing is used the 9-5/8" casing will become the intermediate casing**).
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry.**
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.

If cement does not circulate to surface on the intermediate casing, the cement on the production casing must come to surface.

Centralizers required on horizontal leg, must be type for horizontal service and a minimum of one every other joint.

3. The minimum required fill of cement behind the **7 X 5-1/2** inch production casing is:
 - Cement to surface. If cement does not circulate, contact the appropriate BLM office.
4. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.

C. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API 53.

plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.

D. DRILL STEM TEST

If drill stem tests are performed, Onshore Order 2.III.D shall be followed.

E. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

JAM 060319



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Operator Certification Data Report

06/20/2019

Operator Certification

I hereby certify that I, or someone under my direct supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exist; that I have full knowledge of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.

NAME: Brian Wood

Signed on: 10/22/2018

Title: President

Street Address: 37 Verano Loop

City: Santa Fe

State: NM

Zip: 87508

Phone: (505)466-8120

Email address: afmss@permitswest.com

Field Representative

Representative Name:

Street Address:

City:

State:

Zip:

Phone:

Email address:



APD ID: 10400035427

Submission Date: 10/22/2018

Highlighted data
reflects the most
recent changes

Operator Name: PERCUSSION PETROLEUM OPERATING LLC

Well Name: OSAGE BOYD 15 FEDERAL COM

Well Number: 19H

Show Final Text

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - General

APD ID: 10400035427

Tie to previous NOS?

Submission Date: 10/22/2018

BLM Office: CARLSBAD

User: Brian Wood

Title: President

Federal/Indian APD: FED

Is the first lease penetrated for production Federal or Indian? FED

Lease number: NMNM060341

Lease Acres: 40

Surface access agreement in place?

Allotted?

Reservation:

Agreement in place? NO

Federal or Indian agreement:

Agreement number:

Agreement name:

Keep application confidential? NO

Permitting Agent? YES

APD Operator: PERCUSSION PETROLEUM OPERATING LLC

Operator letter of designation:

Operator Info

Operator Organization Name: PERCUSSION PETROLEUM OPERATING LLC

Operator Address: 919 Milam Street, Suite 2475

Zip: 77002

Operator PO Box:

Operator City: Houston

State: TX

Operator Phone: (713)589-2337

Operator Internet Address:

Section 2 - Well Information

Well in Master Development Plan? NO

Master Development Plan name:

Well in Master SUPO? NO

Master SUPO name:

Well in Master Drilling Plan? NO

Master Drilling Plan name:

Well Name: OSAGE BOYD 15 FEDERAL COM

Well Number: 19H

Well API Number:

Field/Pool or Exploratory? Field and Pool

Field Name: N. SEVEN RIVERS; Pool Name:
GLORIETA -YESO

Is the proposed well in an area containing other mineral resources? USEABLE WATER,NATURAL GAS,OIL

Operator Name: PERCUSSION PETROLEUM OPERATING LLC

Well Name: OSAGE BOYD 15 FEDERAL COM

Well Number: 19H

Describe other minerals:

Is the proposed well in a Helium production area? N **Use Existing Well Pad?** NO **New surface disturbance?**

Type of Well Pad: MULTIPLE WELL

Multiple Well Pad Name:

Number: 18H

Well Class: HORIZONTAL

OSAGE BOYD 15 FEDERAL
COM

Number of Legs: 1

Well Work Type: Drill

Well Type: OIL WELL

Describe Well Type:

Well sub-Type: INFILL

Describe sub-type:

Distance to town: 14 Miles

Distance to nearest well: 240 FT

Distance to lease line: 270 FT

Reservoir well spacing assigned acres Measurement: 160 Acres

Well plat: Osage_19H_Plat_GasCap_Plan_20181022120911.pdf

Well work start Date: 12/31/2018

Duration: 30 DAYS

Section 3 - Well Location Table

Survey Type: RECTANGULAR

Describe Survey Type:

Datum: NAD83

Vertical Datum: NAVD88

Survey number: 7977

	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD
SHL Leg #1	431	FNL	237 0	FWL	19S	25E	22	Aliquot NENW 4	32.62560 4	- 104.4733 484	EDD Y	NEW MEXI CO	NEW MEXI CO	F	FEE	347 3	0	0
KOP Leg #1	465	FNL	229 2	FWL	19S	25E	22	Aliquot NENW 91	32.62510 91	- 104.4737 374	EDD Y	NEW MEXI CO	NEW MEXI CO	F	FEE	113 6	233 8	233 7
PPP Leg #1	132 5	FNL	226 9	FWL	19S	25E	15	Aliquot NENW 9	32.66453 9	- 104.4738 36	EDD Y	NEW MEXI CO	NEW MEXI CO	F	NMNM 060341	559	703 8	291 4

Operator Name: PERCUSSION PETROLEUM OPERATING LLC

Well Name: OSAGE BOYD 15 FEDERAL COM

Well Number: 19H

	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD
EXIT Leg #1	20	FNL	226 9	FWL	19S	25E	15	Aliquot NENW 6	32.66798 6	- 104.4738 42	EDD Y	NEW MEXI CO	NEW MEXI CO	F	NMNM 060341	569	830 5	290 4
BHL Leg #1	20	FNL	226 9	FWL	19S	25E	15	Aliquot NENW 6	32.66798 6	- 104.4738 42	EDD Y	NEW MEXI CO	NEW MEXI CO	F	NMNM 060341	569	830 5	290 4



APD ID: 10400035427

Submission Date: 10/22/2018

Highlighted data
reflects the most
recent changes

Operator Name: PERCUSSION PETROLEUM OPERATING LLC

Well Name: OSAGE BOYD 15 FEDERAL COM

Well Number: 19H

Show Final Text

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical Depth	Measured Depth	Lithologies	Mineral Resources	Producing Formation
1	QUATERNARY	3473	0	0	OTHER : Caliche	USEABLE WATER	No
2	GRAYBURG	2871	602	602	DOLOMITE	NATURAL GAS,OIL	No
3	SAN ANDRES	2686	787	787	DOLOMITE	NATURAL GAS,OIL	No
4	GLORIETA	1126	2347	2349	DOLOMITE	NATURAL GAS,OIL	No
5	YESO	971	2502	2508	DOLOMITE	NATURAL GAS,OIL	Yes

Section 2 - Blowout Prevention

Pressure Rating (PSI): 3M

Rating Depth: 5000

Equipment: A 3000-psi 5000' rated BOP stack consisting of annular preventer and double (blind and pipe) ram will be used below surface casing to TD.

Requesting Variance? NO

Variance request:

Testing Procedure: Pressure tests will be conducted before drilling out from under all casing strings. Third party test crews will conduct all tests. All tests will be recorded for 10-minutes on low pressure (500 psi) and 10-minutes on high pressure (3000-psi). After BOP testing is complete, test casing (without test plug) to 2000-psi for 30 minutes. All tests will be charted on a plot. BOPs will be function tested every day.

Choke Diagram Attachment:

Osage_19H_Choke_20181022121410.pdf

BOP Diagram Attachment:

Osage_19H_BOP_20181022121419.pdf

Operator Name: PERCUSSION PETROLEUM OPERATING LLC

Well Name: OSAGE BOYD 15 FEDERAL COM

Well Number: 19H

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	12.25	9.625	NEW	API	N	0	1279	0	1278	3473		1279	J-55	36	LTC	1.125	1.125	DRY	1.8	DRY	1.8
2	PRODUCTI ON	8.75	7.0	NEW	API	Y	0	2650	0	2634	3473		2650	L-80	32	BUTT	1.125	1.125	DRY	1.8	DRY	1.8
3	PRODUCTI ON	8.75	5.5	NEW	API	Y	2650	8305	2634	2904			5655	L-80	17	BUTT	1.125	1.125	DRY	1.8	DRY	1.8

Casing Attachments

Casing ID: 1 String Type: SURFACE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Osage_19H_Casing_Design_Assumptions_20181022121447.pdf

Operator Name: PERCUSSION PETROLEUM OPERATING LLC

Well Name: OSAGE BOYD 15 FEDERAL COM

Well Number: 19H

Casing Attachments

Casing ID: 2 String Type: PRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Osage_19H_Casing_Design_Assumptions_20181022121516.pdf

Casing Design Assumptions and Worksheet(s):

Osage_19H_Casing_Design_Assumptions_20181022121526.pdf

Casing ID: 3 String Type: PRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Osage_19H_Casing_Design_Assumptions_20181022121559.pdf

Casing Design Assumptions and Worksheet(s):

Osage_19H_Casing_Design_Assumptions_20181022121611.pdf

Section 4 - Cement

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		0	1279	637	1.32	14.8	840	100	Class C	2% CaCl + ¼ pound per sack celloflake

PRODUCTION	Lead		0	2650	495	1.97	12.6	975	50	65/65/6 Class C	65/65/6 Class C
PRODUCTION	Tail		0	2650	1375	1.32	14.8	1815	50	Class C	2% CaCl + ¼ pound per sack celloflake
PRODUCTION	Lead		2650	8305	495	1.97	12.6	975	50	65/65/6 Class C	6% gel + 5% salt + ¼ pound per sack

Operator Name: PERCUSSION PETROLEUM OPERATING LLC

Well Name: OSAGE BOYD 15 FEDERAL COM

Well Number: 19H

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
PRODUCTION	Tail		2650	8305	1375	1.32	14.8	1815	50	Class C	celloflake + 0.2% C41-P 2% CaCl + ¼ pound per sack celloflake

Section 5 - Circulating Medium

Mud System Type: Closed

Will an air or gas system be Used? NO

Description of the equipment for the circulating system in accordance with Onshore Order #2:

Diagram of the equipment for the circulating system in accordance with Onshore Order #2:

Describe what will be on location to control well or mitigate other conditions: All necessary mud products (LCM) will be on site to handle any abnormal hole condition that may be encountered while drilling this well.

Describe the mud monitoring system utilized: An electronic/mechanical mud monitor with a minimum pit volume totalizer, stroke counter, and flow sensor will be used.

Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
0	1279	OTHER : Fresh water/gel	8.4	9.2							
2338	8305	OTHER : Cut brine	8.6	9.2							
1279	2338	OTHER : Fresh water/cut brine	8.3	9.2							

Operator Name: PERCUSSION PETROLEUM OPERATING LLC

Well Name: OSAGE BOYD 15 FEDERAL COM

Well Number: 19H

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

A mud logger will be used from GL to TD. Samples will be collected every 10' in the lateral pay zone.

No electric logs are planned at this time.

List of open and cased hole logs run in the well:

MUDLOG

Coring operation description for the well:

No core or drill stem test is planned.

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 1252

Anticipated Surface Pressure: 610.91

Anticipated Bottom Hole Temperature(F): 114

Anticipated abnormal pressures, temperatures, or potential geologic hazards? NO

Describe:

Contingency Plans geohazards description:

Contingency Plans geohazards attachment:

Hydrogen Sulfide drilling operations plan required? YES

Hydrogen sulfide drilling operations plan:

Osage_19H_H2S_Plan_20181022121856.pdf

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

Osage_19H_Horizontal_Drill_Plan_20181022121927.pdf

Other proposed operations facets description:


See revised Drill Plan for geological deficiencies identified in 5/14/19 Deficiency letter

Other proposed operations facets attachment:

Osage_19H_Contingency_Plan_20181022121944.pdf

Osage_19H_Drill_Plan_revised_20190527091532.pdf

Other Variance attachment:

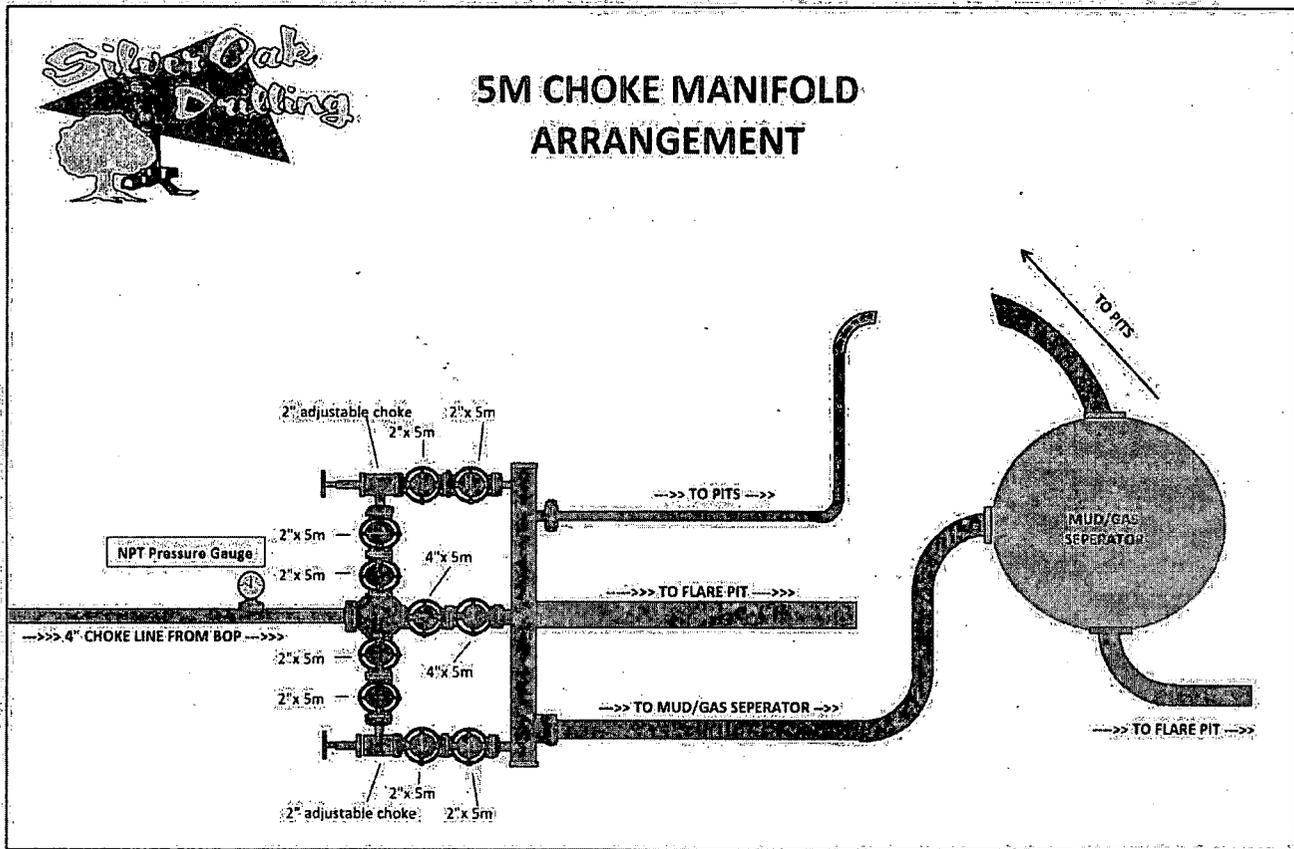

Pressure Testing


- a. All testing to be done with 3rd party testing crews
- b. All tests should be done for each BOP/Valve/Choke Manifold:
 1. Recorded for 10 minutes on low pressure (500 psi)
 2. Recorded for 10 minutes on high pressure (3000 psi)
 3. All BOP testing will be completed with a test plug in place in wellhead
- c. After BOP testing is complete, test casing (without test plug) to 2000 psi for 30 minutes
- d. Company representative to email all copies of all plots to Drilling Engineer as well as save in the well file.
- e. **BOP's shall be function tested every day.**

Gas Buster Operation

- a. Flow should be directed to pits unless choke is needed to control gas
- b. Adjustable choke to adjusted only by Percussion Rep on location
- c. Flare should remain burning (pilot lit) anytime fluid is going through gas buster
- d. Choke needs to be monitored to not overrun gas buster

Nipple-Up

- a. Raise stack and center over the wellhead
- b. Install DSA and ring gaskets
- c. Lower stack onto DSA
- d. Torque DSA flange bolts in a star pattern to the specified torque
- e. Verify BOP is centered to the rotary table
- f. Install rotating head
- g. Install hydraulic lines to BOP
- h. Verify manifold line-up
- i. Test BOP & manifold

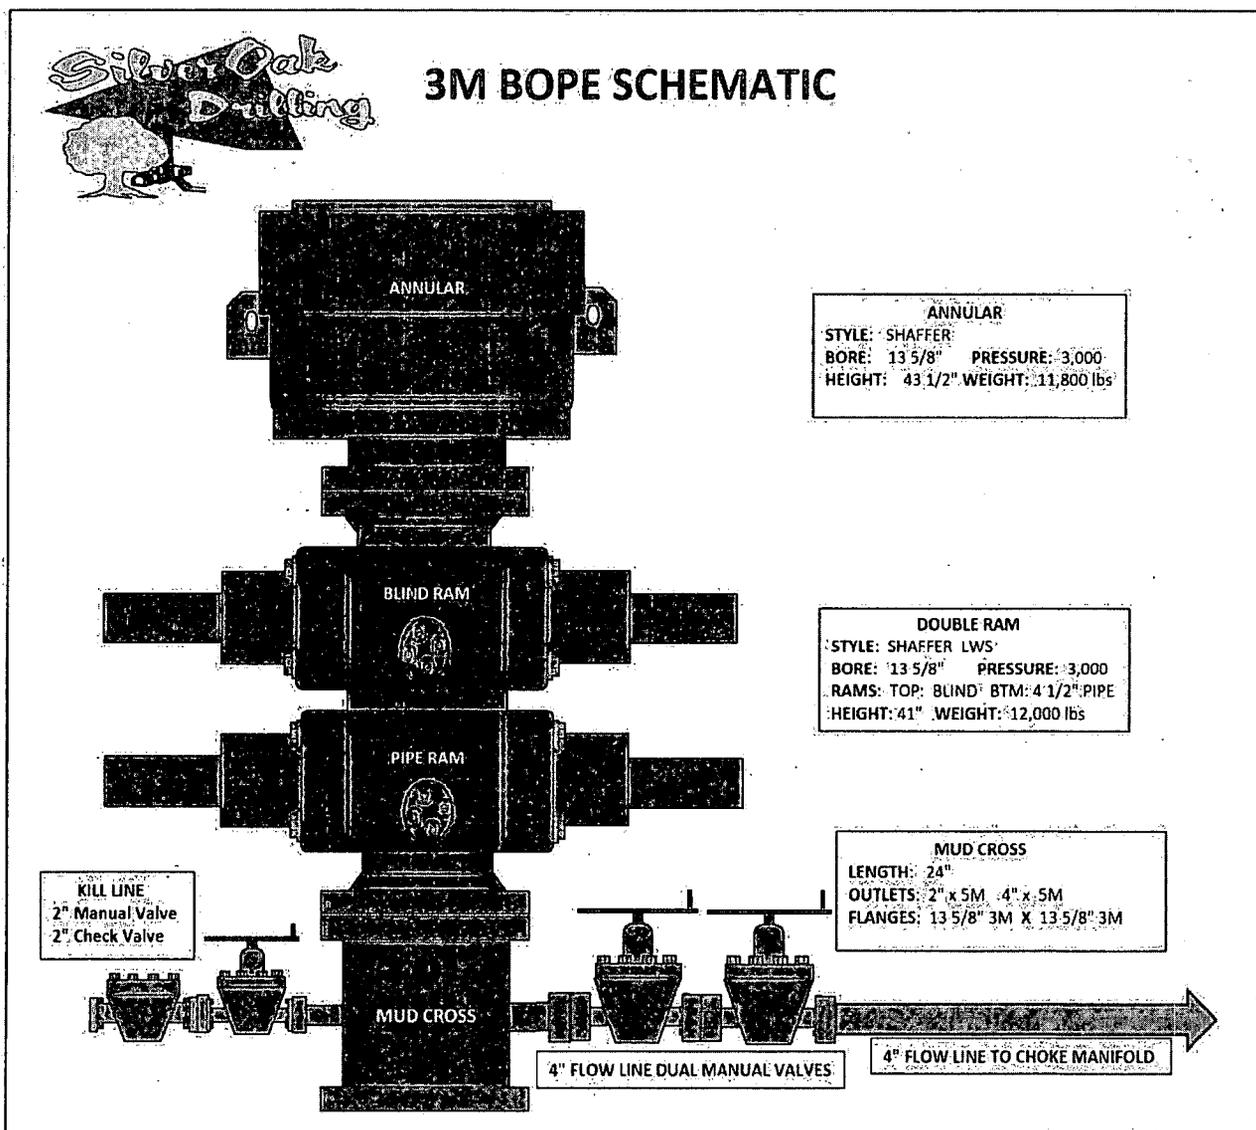



Casing Design Criteria and Load Case Assumptions

Percussion Petroleum Operating, LLC.
 919 Milam Street, Suite 2475
 Houston, TX 77002

Lakewood Federal Com horizontal Wells

1. Collapse: $DF_c=1.125$
 - a. Full Internal Evacuation: Collapse force equal to the mud gradient in which the casing will be run (0.65 psi/ft). The effects of axial load on collapse will be considered.
 - b. Cementing: Collapse force equal to the gradient of planned cement slurries to planned depths and minimum mud gradient in which the casing will be run above that (0.65 psi/ft) and an internal force equal to mud gradient of displacement fluid (0.43 psi/ft)

2. Burst: $DF_B=1.125$
 - a. Pressure Test: psi casing test with an external force equal to the mud gradient in which the casing will be run (0.65 psi/ft), which is a more conservative backup force than pore pressure.
 - b. Injection Down Casing: psi surface injection pressure plus an internal pressure gradient of 0.65 psi/ft with an external force equal to the mud gradient in which the casing will be run (0.65 psi/ft), which is a more conservative backup force than pore pressure.

3. Tensile: $DF_T=1.8$
 - a. Overpull: A downward force of 100,000 lbs is applied at the shoe along with the weight of the casing string utilizing the effects of buoyancy (10.5 ppg).

4. Surface Casing Program									
Casing Size (in)	Weight (ppf)	Grade	Connection	ID	ID (drift)	Collapse (psi)	Burst (psi)	Tension (1,000 lbs)	Capacity (bbl/ft)
9-5/8"	36	J-55	STC	8.921	8.765	2,020	3,520	394	0.0773
Safety Factors									
	API Rec. SF	ACTUAL SF	Case	External Fluids			Internal Fluids		
Collapse	1.125	3.30	Lost Circulation	Mud			None		
Burst	1.125	1.46	Plug Bump	Green Cement + 2ksi surf pressure			Displacement Fluid/Mud		
Tension	1.8	2.80	100-klbs Overpull	Mud			Mud		

Buoyed Casing Weight: 40,798 lbs (assuming 8.4 ppg fluid and 1,300' casing-worst case scenario)



Production Casing Program									
Casing Size (in)	Weight (ppf)	Grade	Connection	ID	ID (drift)	Collapse (psi)	Burst (psi)	Tension (1,000 lbs)	Capacity (bbl/ft)
7"	32	L-80	BTC	6.094	5.969	8,600	9,060	745	0.0361
5-1/2"	17	L-80	BTC	4.892	4.767	6,280	7,740	348	0.0232
Safety Factors									
	API Rec. SF	ACTUAL SF	Case	External Fluids		Internal Fluids			
Collapse	1.125	3.75	Lost Circulation	Mud		None			
Burst	1.125	2.47	Plug Bump	Green Cement + 2ksi surf pressure		Displacement Fluid/Mud			
Tension	1.8	2.29	100 klbs Overpull	Mud		Mud			

Buoyed Casing Weight: 86,522 lbs (assuming 8.4 ppg fluid and 3,500' TVD-worst case scenario)



Casing Design Criteria and Load Case Assumptions

Percussion Petroleum Operating, LLC.
 919 Milam Street, Suite 2475
 Houston, TX 77002

Lakewood Federal Com horizontal Wells

1. Collapse: $DF_c=1.125$
 - a. Full Internal Evacuation: Collapse force equal to the mud gradient in which the casing will be run (0.65 psi/ft). The effects of axial load on collapse will be considered.
 - b. Cementing: Collapse force equal to the gradient of planned cement slurries to planned depths and minimum mud gradient in which the casing will be run above that (0.65 psi/ft) and an internal force equal to mud gradient of displacement fluid (0.43 psi/ft)

2. Burst: $DF_B=1.125$
 - a. Pressure Test: psi casing test with an external force equal to the mud gradient in which the casing will be run (0.65 psi/ft), which is a more conservative backup force than pore pressure.
 - b. Injection Down Casing: psi surface injection pressure plus an internal pressure gradient of 0.65 psi/ft with an external force equal to the mud gradient in which the casing will be run (0.65 psi/ft), which is a more conservative backup force than pore pressure.

3. Tensile: $DF_T=1.8$
 - a. Overpull: A downward force of 100,000 lbs is applied at the shoe along with the weight of the casing string utilizing the effects of buoyancy (10.5 ppg).

4. Surface Casing Program									
Casing Size (in)	Weight (ppf)	Grade	Connection	ID	ID (drift)	Collapse (psi)	Burst (psi)	Tension (1,000 lbs)	Capacity (bbl/ft)
9-5/8"	36	J-55	STC	8.921	8.765	2,020	3,520	394	0.0773
Safety Factors									
	API Rec. SF	ACTUAL SF	Case	External Fluids		Internal Fluids			
Collapse	1.125	3.30	Lost Circulation	Mud		None			
Burst	1.125	1.46	Plug Bump	Green Cement + 2ksi surf pressure		Displacement Fluid/Mud			
Tension	1.8	2.80	100-klbs Overpull	Mud		Mud			

Buoyed Casing Weight: 40,798 lbs (assuming 8.4 ppg fluid and 1,300' casing-worst case scenario)



Production Casing Program									
Casing Size (in)	Weight (ppf)	Grade	Connection	ID	ID (drift)	Collapse (psi)	Burst (psi)	Tension (1,000 lbs)	Capacity (bbl/ft)
7"	32	L-80	BTC	6.094	5.969	8,600	9,060	745	0.0361
5-1/2"	17	L-80	BTC	4.892	4.767	6,280	7,740	348	0.0232
Safety Factors									
	API Rec. SF	ACTUAL SF	Case	External Fluids		Internal Fluids			
Collapse	1.125	3.75	Lost Circulation	Mud		None			
Burst	1.125	2.47	Plug Bump	Green Cement + 2ksi surf pressure		Displacement Fluid/Mud			
Tension	1.8	2.29	100 klbs Overpull	Mud		Mud			

Buoyed Casing Weight: 86,522 lbs (assuming 8.4 ppg fluid and 3,500' TVD-worst case scenario)



Casing Design Criteria and Load Case Assumptions

Percussion Petroleum Operating, LLC.
 919 Milam Street, Suite 2475
 Houston, TX 77002

Lakewood Federal Com horizontal Wells

1. Collapse: $DF_c=1.125$
 - a. Full Internal Evacuation: Collapse force equal to the mud gradient in which the casing will be run (0.65 psi/ft). The effects of axial load on collapse will be considered.
 - b. Cementing: Collapse force equal to the gradient of planned cement slurries to planned depths and minimum mud gradient in which the casing will be run above that (0.65 psi/ft) and an internal force equal to mud gradient of displacement fluid (0.43 psi/ft)

2. Burst: $DF_B=1.125$
 - a. Pressure Test: psi casing test with an external force equal to the mud gradient in which the casing will be run (0.65 psi/ft), which is a more conservative backup force than pore pressure.
 - b. Injection Down Casing: psi surface injection pressure plus an internal pressure gradient of 0.65 psi/ft with an external force equal to the mud gradient in which the casing will be run (0.65 psi/ft), which is a more conservative backup force than pore pressure.

3. Tensile: $DF_T=1.8$
 - a. Overpull: A downward force of 100,000 lbs is applied at the shoe along with the weight of the casing string utilizing the effects of buoyancy (10.5 ppg).

4. Surface Casing Program									
Casing Size (in)	Weight (ppf)	Grade	Connection	ID	ID (drift)	Collapse (psi)	Burst (psi)	Tension (1,000 lbs)	Capacity (bbl/ft)
9-5/8"	36	J-55	STC	8.921	8.765	2,020	3,520	394	0.0773
Safety Factors									
	API Rec. SF	ACTUAL SF	Case	External Fluids			Internal Fluids		
Collapse	1.125	3.30	Lost Circulation	Mud			None		
Burst	1.125	1.46	Plug Bump	Green Cement + 2ksi surf pressure			Displacement Fluid/Mud		
Tension	1.8	2.80	100 klbs Overpull	Mud			Mud		

Buoyed Casing Weight: 40,798 lbs (assuming 8.4 ppg fluid and 1,300' casing-worst case scenario)



Production Casing Program									
Casing Size (in)	Weight (ppf)	Grade	Connection	ID	ID (drift)	Collapse (psi)	Burst (psi)	Tension (1,000 lbs)	Capacity (bbl/ft)
7"	32	L-80	BTC	6.094	5.969	8,600	9,060	745	0.0361
5-1/2"	17	L-80	BTC	4.892	4.767	6,280	7,740	348	0.0232
Safety Factors									
	API Rec. SF	ACTUAL SF	Case	External Fluids		Internal Fluids			
Collapse	1.125	3.75	Lost Circulation	Mud		None			
Burst	1.125	2.47	Plug Bump	Green Cement + 2ksi surf pressure.		Displacement Fluid/Mud			
Tension	1.8	2.29	100 klbs Overpull	Mud		Mud			

Buoyed Casing Weight: 86,522 lbs (assuming 8.4 ppg fluid and 3,500' TVD-worst case scenario)



Casing Design Criteria and Load Case Assumptions

Percussion Petroleum Operating, LLC.
 919 Milam Street, Suite 2475
 Houston, TX 77002

Lakewood Federal Com horizontal Wells

1. Collapse: $DF_c=1.125$
 - a. Full Internal Evacuation: Collapse force equal to the mud gradient in which the casing will be run (0.65 psi/ft). The effects of axial load on collapse will be considered.
 - b. Cementing: Collapse force equal to the gradient of planned cement slurries to planned depths and minimum mud gradient in which the casing will be run above that (0.65 psi/ft) and an internal force equal to mud gradient of displacement fluid (0.43 psi/ft)

2. Burst: $DF_b=1.125$
 - a. Pressure Test: psi casing test with an external force equal to the mud gradient in which the casing will be run (0.65 psi/ft), which is a more conservative backup force than pore pressure.
 - b. Injection Down Casing: psi surface injection pressure plus an internal pressure gradient of 0.65 psi/ft with an external force equal to the mud gradient in which the casing will be run (0.65 psi/ft), which is a more conservative backup force than pore pressure.

3. Tensile: $DF_t=1.8$
 - a. Overpull: A downward force of 100,000 lbs is applied at the shoe along with the weight of the casing string utilizing the effects of buoyancy (10.5 ppg).

4. Surface Casing Program									
Casing Size (in)	Weight (ppf)	Grade	Connection	ID	ID (drift)	Collapse (psi)	Burst (psi)	Tension (1,000 lbs)	Capacity (bbl/ft)
9-5/8"	36	J-55	STC	8.921	8.765	2,020	3,520	394	0.0773
Safety Factors									
	API Rec. SF	ACTUAL SF	Case	External Fluids		Internal Fluids			
Collapse	1.125	3.30	Lost Circulation	Mud		None			
Burst	1.125	1.46	Plug Bump	Green Cement + 2ksi surf pressure		Displacement Fluid/Mud			
Tension	1.8	2.80	100-klbs Overpull	Mud		Mud			

Buoyed Casing Weight: 40,798 lbs (assuming 8.4 ppg fluid and 1,300' casing-worst case scenario)



Production Casing Program									
Casing Size (in)	Weight (ppf)	Grade	Connection	ID	ID (drift)	Collapse (psi)	Burst (psi)	Tension (1,000 lbs)	Capacity (bbl/ft)
7"	32	L-80	BTC	6.094	5.969	8,600	9,060	745	0.0361
5-1/2"	17	L-80	BTC	4.892	4.767	6,280	7,740	348	0.0232
Safety Factors									
	API Rec. SF	ACTUAL SF	Case	External Fluids		Internal Fluids			
Collapse	1.125	3.75	Lost Circulation	Mud		None			
Burst	1.125	2.47	Plug Bump	Green Cement + 2ksi surf pressure		Displacement Fluid/Mud			
Tension	1.8	2.29	100 klbs Overpull	Mud		Mud			

Buoyed Casing Weight: 86,522 lbs (assuming 8.4 ppg fluid and 3,500' TVD-worst case scenario)



Casing Design Criteria and Load Case Assumptions

Percussion Petroleum Operating, LLC.
 919 Milam Street, Suite 2475
 Houston, TX 77002

Lakewood Federal Com horizontal Wells

1. Collapse: $DF_c=1.125$
 - a. Full Internal Evacuation: Collapse force equal to the mud gradient in which the casing will be run (0.65 psi/ft). The effects of axial load on collapse will be considered.
 - b. Cementing: Collapse force equal to the gradient of planned cement slurries to planned depths and minimum mud gradient in which the casing will be run above that (0.65 psi/ft) and an internal force equal to mud gradient of displacement fluid (0.43 psi/ft)

2. Burst: $DF_b=1.125$
 - a. Pressure Test: psi casing test with an external force equal to the mud gradient in which the casing will be run (0.65 psi/ft), which is a more conservative backup force than pore pressure.
 - b. Injection Down Casing: psi surface injection pressure plus an internal pressure gradient of 0.65 psi/ft with an external force equal to the mud gradient in which the casing will be run (0.65 psi/ft), which is a more conservative backup force than pore pressure.

3. Tensile: $DF_t=1.8$
 - a. Overpull: A downward force of 100,000 lbs is applied at the shoe along with the weight of the casing string utilizing the effects of buoyancy (10.5 ppg).

4. Surface Casing Program									
Casing Size (in)	Weight (ppf)	Grade	Connection	ID	ID (drift)	Collapse (psi)	Burst (psi)	Tension (1,000 lbs)	Capacity (bbl/ft)
9-5/8"	36	J-55	STC	8.921	8.765	2,020	3,520	394	0.0773
Safety Factors									
	API Rec. SF	ACTUAL SF	Case	External Fluids		Internal Fluids			
Collapse	1.125	3.30	Lost Circulation	Mud		None			
Burst	1.125	1.46	Plug Bump	Green Cement + 2ksi surf pressure		Displacement Fluid/Mud			
Tension	1.8	2.80	100-klbs Overpull	Mud		Mud			

Buoyed Casing Weight: 40,798 lbs (assuming 8.4 ppg fluid and 1,300' casing-worst case scenario)



Production Casing Program									
Casing Size (in)	Weight (ppf)	Grade	Connection	ID	ID (drift)	Collapse (psi)	Burst (psi)	Tension (1,000 lbs)	Capacity (bbl/ft)
7"	32	L-80	BTC	6.094	5.969	8,600	9,060	745	0.0361
5-1/2"	17	L-80	BTC	4.892	4.767	6,280	7,740	348	0.0232
Safety Factors									
	API Rec. SF	ACTUAL SF	Case	External Fluids		Internal Fluids			
Collapse	1.125	3.75	Lost Circulation	Mud		None			
Burst	1.125	2.47	Plug Bump	Green Cement + 2ksi surf pressure		Displacement Fluid/Mud			
Tension	1.8	2.29	100 klbs Overpull	Mud		Mud			

Buoyed Casing Weight: 86,522 lbs (assuming 8.4 ppg fluid and 3,500' TVD-worst case scenario)



Hydrogen Sulfide Drilling Operations Plan

Percussion Petroleum Operating, LLC.
919 Milam Street, Suite 2475
Houston, TX 77002

1. H₂S Safety Instructions to the following:
 - Characteristics of H₂S.
 - Physical effects and hazards.
 - Principal and operation of H₂S detectors, warning system and briefing areas.
 - Evacuation procedures, routes and First Aid.
 - Proper use of safety equipment and life support systems.
 - Essential personnel meeting medical evaluation criteria will receive additional training on the proper use of 30 min pressure demand air packs.

2. H₂S Detection & Alarm Systems:
 - H₂S sensor/detectors to be located on the drilling rig floor, in the base of the sub structure/cellar area, on the mud returns pits by the shale shaker. Additional H₂S monitors may be placed as deemed necessary.
 - An audio alarm system will be installed on the derrick, the floor, and in the doghouse.

3. Windsocks and Wind Streamers:
 - Windsocks at mud pit area should be high enough to be visible.
 - Windsock on the rig floor/top of doghouse should be high enough to be visible.

4. Condition Flags & Signs:
 - Warning sign on access road to location
 - Flags to be displayed on sign at entrance to location
 - i. Green Flag – Normal Safe Operation Condition
 - ii. Yellow Flag – Potential Pressure and Danger
 - iii. Red Flag – Danger (H₂S present in dangerous concentrations) Only H₂S trained personnel admitted on location

5. Well Control Equipment:
 - See attached APD



6. Communications:

- While working under masks, chalkboards will be used for communications
- Hand signals will be used where chalk board is inappropriate
- Two-way radio will be used to communicate off location in case of emergency help is required. In most cases cellular telephones will be available at drilling foreman's trailer or living quarters.

7. Drilling Stem Testing:

- No Drill Stem Tests or hole coring is planned at this time.

8. Drilling contractor supervisor will be required to be familiar with the effects H₂S has on tubular goods and other mechanical equipment.

9. If H₂S is encountered, mud system will be altered if necessary to maintain control of formation. A mud gas separator will be brought into service along with H₂S scavenger chemicals if necessary.

10. Emergency Contacts:

Emergency Contact Information - H ₂ S Contingency Plan				
Percussion Petroleum Operating, LLC	713-518-1331			
Key Parties at Percussion Petroleum:		Office	Mobile	Email
Lelan J. Anders	Vice President of Operations	713-429-1291	281-908-1752	Lelan@PercussionPetroleum.com
Lupe Carrillo	Chief Operating Officer	713-589-9509	832-776-1869	Lupe@PercussionPetroleum.com
John H. Campbell III	Chief Executive Officer	713-589-4683	936-718-6488	John@PercussionPetroleum.com

Artesia, New Mexico:	
Ambulance	911
State Police	575-746-2703
City Police	575-746-2703
Sheriff's Office	575-746-9888
Fire Department	575-746-2701
Local Emergency Planning Committee	575-746-2122
New Mexico Oil Conservation Division	575-748-1283

Carlsbad, New Mexico:	
Ambulance	911
State Police	575-885-3137
City Police	575-885-2111
Sheriff's Office	575-887-7551
Fire Department	575-887-3798
Local Emergency Planning Committee	575-887-6544
New Mexico Oil Conservation Division	575-887-6544



PERCUSSION PETROLEUM LLC



Santa Fe, New Mexico:	
New Mexico Emergency Response Commission	505-476-9600
New Mexico Emergency Response Commission (24 hr)	505-827-9126
New Mexico State Emergency Operations Center	505-476-9635

Federal Contacts:	
Carlsbad BLM Office	575-234-5972
National Emergency Response Center (Washington, DC)	800-424-8802

Medical:	
Flight for Life - Lubbock, TX	806-743-9911
AeroCare - Lubbock, TX	806-747-8923
Med Flight Air Ambulance - Albuquerque, NM	505-842-4433
SB Air Med Service - Albuquerque, NM	505-842-4949

Well Control/Other:	
Wild Well Control	281-784-4700
Boots & Coots IWC	800-256-9688
B.J. Services	575-746-3569
Halliburton	575-746-2757

SECTION 22, TOWNSHIP 19 SOUTH, RANGE 25 EAST, N.M.P.M.,
 EDDY COUNTY, NEW MEXICO.

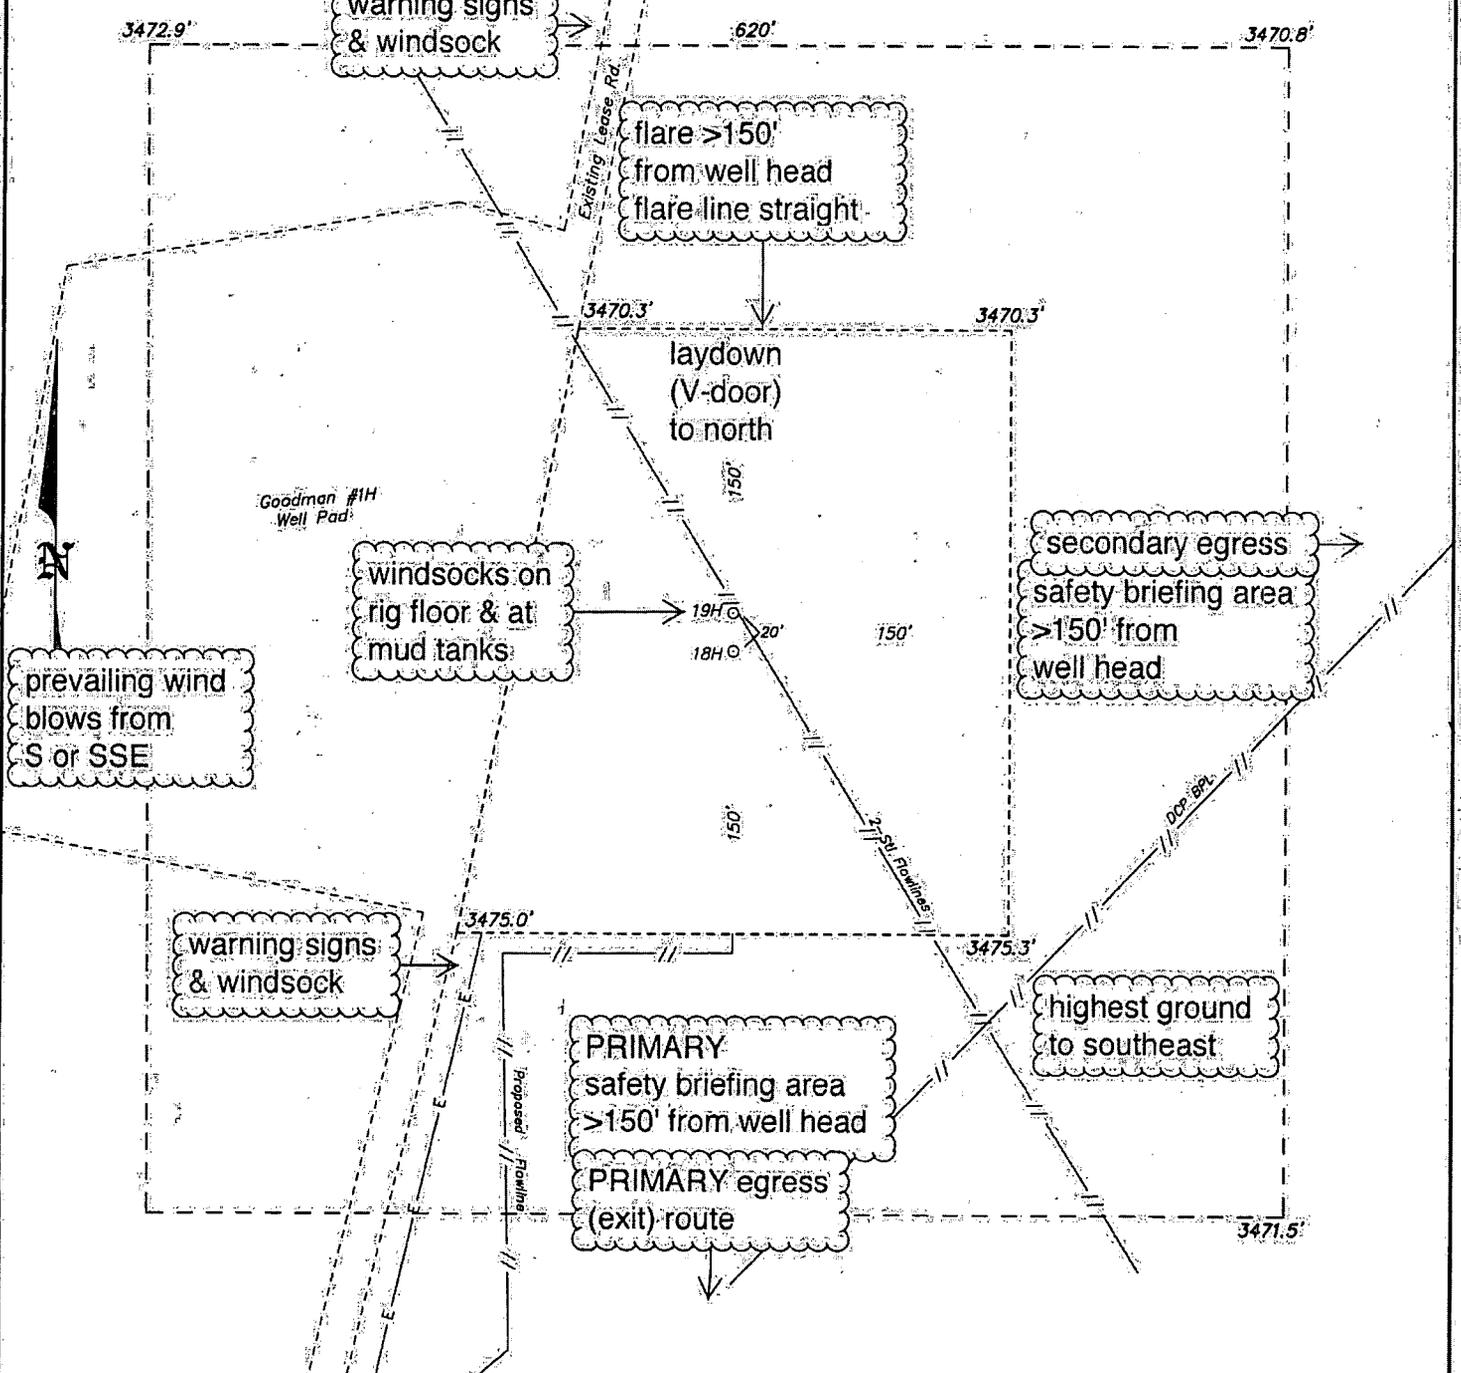

PERCUSSION PETROLEUM OPERATING, LLC

REF: OSAGE BOYD 15 FEDERAL COM 19H / WELL PAD: TOPO
 THE OSAGE BOYD 15 FEDERAL COM 19H LOCATED 431' FROM
 THE NORTH LINE AND 2370' FROM THE WEST LINE OF
 SECTION 22, TOWNSHIP 19 SOUTH, RANGE 25 EAST,
 N.M.P.M., EDDY COUNTY, NEW MEXICO.




P.O. Box 1786
 1120 N. West County Rd.
 Hobbs, New Mexico 88241
 (575) 393-7316 — Office
 (575) 392-2206 — Fax
 basin-surveys.com

Percussion Petroleum Operating, LLC

Osage Boyd "15" Federal Com 18H/19H
H/S Contingency Plan:
Radius Map

Section 22, Township 19S, Range 25E
Eddy County, New Mexico



 Surface Hole Location



NAD 1983 New Mexico State Plane East
FIPS 3601 Feet

PERMITS - 01851

Prepared by Perris Weil, Inc., September 13, 2018
for Percussion Petroleum Operating, LLC

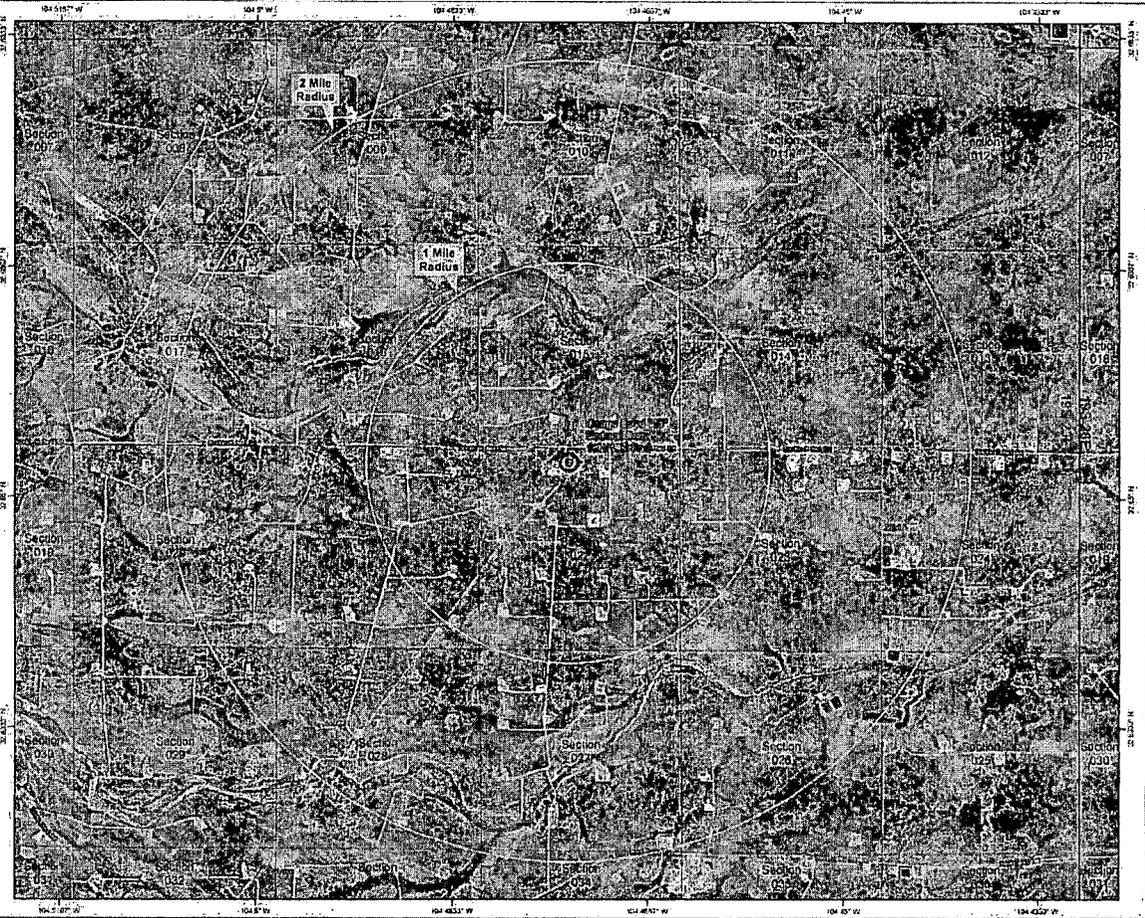



Company: Percussion Petroleum, LLC
 Project: Eddy County, NM
 Site: Osage Boyd 15 FED COM
 Well: #19H
 Wellbore: OH
 Rig:
 Design: Plan #1 / 9:19, July 21 2018

PROJECT DETAILS: Eddy County, NM
 Geoid: US State Plane 1983
 Datum: North American Datum 1983
 Elevation: GCR 1983
 Zone: New Mexico Eastern Zone
 System Datum: Mean Sea Level



WELL DETAILS: #19H

RKB = 17' @ 3489.00usft					
3472.00					
+N/S	+E/W	Northing	Easting	Latitude	Longitude
0.00	0.00	601176.90	499203.00	32.652804	-104.473484

WELLBORE TARGET DETAILS (MAP CO-ORDINATES)

Name	TVD	+N/S	+E/W	Northing	Easting	Shape
OB 15: 19H SHL (431' FNL & 2370' FWL)	0.00	0.00	0.00	601176.90	499203.00	Point
OB 15: 19H LTP	2904.00	5516.00	-102.10	606652.50	498100.90	Point
OB 15: 19H PBHL (20' FNL & 2269' FWL)	2904.00	5586.10	-102.00	606772.80	498100.10	Point
OB 15: 19H FTPLP	2919.00	536.30	-101.40	601718.10	498101.60	Point
OB 15: 19H IP1	2919.00	3751.20	-99.00	604628.00	498104.00	Point




SECTION DETAILS

Sec	MD	Inc	Acc	TVD	+N/S	+E/W	Mag	VSec
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2	350.00	0.00	0.00	350.00	0.00	0.00	0.00	0.00
3	476.84	2.83	246.75	476.80	-1.10	-2.57	2.00	-1.10
4	2328.37	2.83	246.75	2328.51	-33.69	-71.16	0.00	-33.69
5	3248.38	80.00	0.04	2919.00	539.30	-101.40	10.00	539.30
6	6480.28	90.00	0.04	2919.00	3751.20	-99.00	0.00	3751.20
7	6489.02	90.50	359.90	2915.89	3776.94	-99.01	2.00	3776.94
8	8190.83	90.50	359.90	2904.15	6481.68	-101.90	0.00	6481.68
9	8223.15	90.00	359.43	2904.00	6518.00	-102.10	2.00	6518.00
10	8306.28	90.00	359.43	2904.00	6594.10	-102.90	0.00	6594.10

TOTAL CORRECTION
 To convert a Magnetic Direction to a Grid Direction, Add 7.36°



Azimuths to Grid North
 True North: 0.08°
 Magnetic North: 7.36°
 Magnetic Field
 Strength: 47982.1nT
 Dip Angle: 60.30°
 Date: 07/19/2018
 Model: IGRF2015

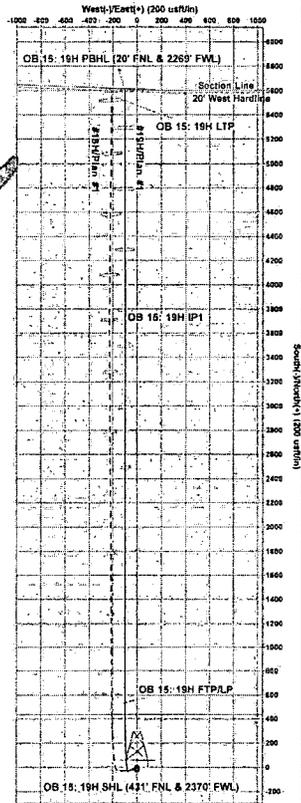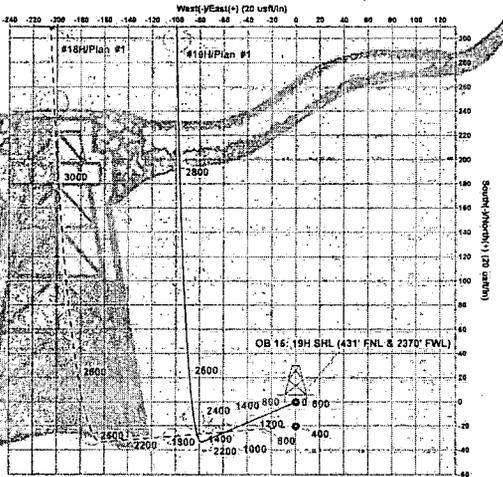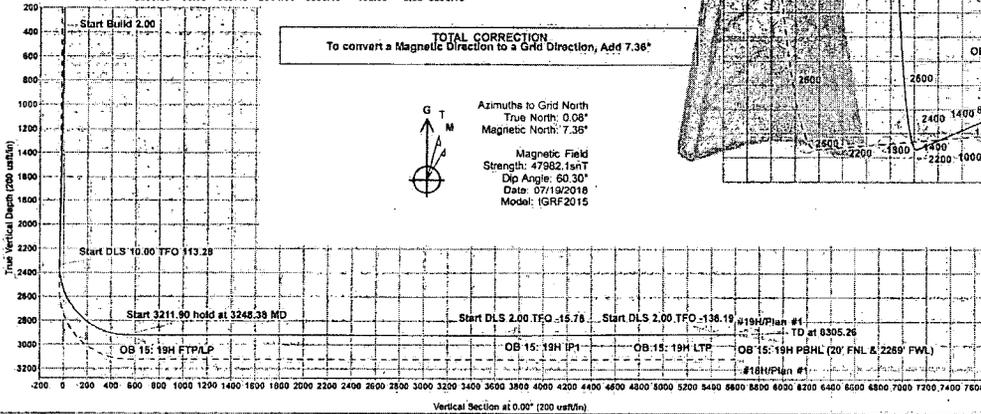

Disclaimer:
 All Plan Details, Inventory
 Dates and other data is
 provided by customer and
 subject to change.
 08/19/18



WBDS Standard Planning Report



Company:	Percussion Petroleum, LLC	Local Co-ordinate Reference:	Well #19H - Slot 19
Project:	Eddy County, NM	TVD Reference:	RKB = 17 @ 3489.00usft
Site:	Osage Boyd 15 FED COM	MD Reference:	RKB = 17 @ 3489.00usft
Well:	#19H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	Plan #1	Database:	WBDS_SQL_2

Project:	Eddy County, NM	System Datum:	Mean Sea Level
Map System:	US State Plane 1983		
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site:	Osage Boyd 15 FED COM		
Site Position:		Northing:	600,962.30 usft
From:	Map	Easting:	498,514.50 usft
Position Uncertainty:	0.00 usft	Slot Radius:	13.200 in.
		Latitude:	32.652008
		Longitude:	-104.478969
		Grid Convergence:	-0.08''

Well:	#19H - Slot 19		
Well Position:	+N-S 0.00 usft	Northing:	601,176.80 usft
	+E-W 0.00 usft	Easting:	498,203.00 usft
Position Uncertainty:	0.00 usft	Wellhead Elevation:	usft
		Latitude:	32.652604
		Longitude:	-104.473484
		Ground Level:	3,472.00 usft

Wellbore:	OH
-----------	----

Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2015	07/19/18	7.29	60.30	47,982,11321138

Design:	Plan #1
Audit Notes:	
Version:	Phase: PLAN Tie On Depth: 0.00
Vertical Section:	Depth From (TVD) (usft) +N-S (usft) +E-W (usft) Direction (°)
	0.00 0.00 0.00 0.00

Survey Tool Program	Date	07/20/18
From (usft)	To (usft)	Survey (Wellbore)
0.00	8,305.26	Plan #1 (OH)
		Tool Name
		MWD+IGRF
		Description
		OWSG MWD + IGRF or WMM



WBDS Standard Planning Report



Company:	Percussion Petroleum, LLC	Local Co-ordinate Reference:	Well #19H - Slot 19
Project:	Eddy County, NM	TVD Reference:	RKB = 17' @ 3489.00usft
Site:	Osage Boyd 15 FED COM	MD Reference:	RKB = 17' @ 3489.00usft
Well:	#19H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	Plan #1	Database:	WBDS_SQL_2

MD (usft)	Inc (")	Azi (azimuth) (°)	TVD (usft)	N/S (usft)	E/W (usft)	V. Sec (usft)	DLeg (°/100ft)	Build (°/100ft)	Turn (°/100ft)	TFace (°)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
350.00	0.00	0.00	350.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	1.00	246.75	400.00	-0.17	-0.40	-0.17	2.00	2.00	0.00	246.75
476.64	2.53	246.75	476.80	-1.10	-2.57	-1.10	2.00	2.00	0.00	0.00
500.00	2.53	246.75	499.94	-1.51	-3.52	-1.51	0.00	0.00	0.00	0.00
600.00	2.53	246.75	599.84	-3.26	-7.58	-3.26	0.00	0.00	0.00	0.00
700.00	2.53	246.75	699.74	-5.00	-11.64	-5.00	0.00	0.00	0.00	0.00
800.00	2.53	246.75	799.64	-6.75	-15.70	-6.75	0.00	0.00	0.00	0.00
900.00	2.53	246.75	899.55	-8.49	-19.76	-8.49	0.00	0.00	0.00	0.00
1,000.00	2.53	246.75	999.45	-10.24	-23.82	-10.24	0.00	0.00	0.00	0.00
1,100.00	2.53	246.75	1,099.35	-11.98	-27.88	-11.98	0.00	0.00	0.00	0.00
1,200.00	2.53	246.75	1,199.25	-13.73	-31.94	-13.73	0.00	0.00	0.00	0.00
1,300.00	2.53	246.75	1,299.15	-15.47	-36.00	-15.47	0.00	0.00	0.00	0.00
1,400.00	2.53	246.75	1,399.06	-17.21	-40.06	-17.21	0.00	0.00	0.00	0.00
1,500.00	2.53	246.75	1,498.96	-18.96	-44.12	-18.96	0.00	0.00	0.00	0.00
1,600.00	2.53	246.75	1,598.86	-20.70	-48.18	-20.70	0.00	0.00	0.00	0.00
1,700.00	2.53	246.75	1,698.76	-22.45	-52.24	-22.45	0.00	0.00	0.00	0.00
1,800.00	2.53	246.75	1,798.67	-24.19	-56.30	-24.19	0.00	0.00	0.00	0.00
1,900.00	2.53	246.75	1,898.57	-25.94	-60.36	-25.94	0.00	0.00	0.00	0.00
2,000.00	2.53	246.75	1,998.47	-27.68	-64.42	-27.68	0.00	0.00	0.00	0.00
2,100.00	2.53	246.75	2,098.37	-29.43	-68.48	-29.43	0.00	0.00	0.00	0.00
2,200.00	2.53	246.75	2,198.28	-31.17	-72.54	-31.17	0.00	0.00	0.00	0.00
2,300.00	2.53	246.75	2,298.18	-32.92	-76.60	-32.92	0.00	0.00	0.00	0.00
2,338.37	2.53	246.75	2,336.51	-33.59	-78.16	-33.59	0.00	0.00	0.00	0.00



WBDS Standard Planning Report



Company: Percussion Petroleum, LLC
 Project: Eddy County, NM
 Site: Osage Boyd-15 FED COM.
 Well: #19H
 Wellbore: OH
 Design: Plan #1

Local Co-ordinate Reference:
 TVD Reference:
 MD Reference:
 North Reference:
 Survey Calculation Method:
 Database:

Well #19H - Slot 19
 RKB = 17' @ 3489.00usft
 RKB = 17' @ 3489.00usft
 Grid
 Minimum Curvature
 WBDS: SOL_2

Planned Survey

MD (usft)	Inc (")	Azi (azimuth) (°)	TVD (usft)	N/S (usft)	EW (usft)	V. Sec (usft)	DLeg (°/100ft)	Build (°/100ft)	Turn (°/100ft)	TFace (")
2,350.00	2.33	274.02	2,348.13	-33.67	-78.63	-33.87	10.00	-1.73	234.48	113.28
2,400.00	5.66	335.84	2,398.02	-31.35	-80.66	-31.35	10.00	-6.68	123.65	86.03
2,450.00	10.42	347.28	2,447.52	-24.68	-82.67	-24.68	10.00	-9.52	22.88	24.30
2,500.00	15.33	351.52	2,496.24	-13.73	-84.64	-13.73	10.00	-9.83	8.48	12.97
2,550.00	20.29	353.73	2,543.83	1.44	-86.56	1.44	10.00	-9.91	4.42	8.83
2,600.00	25.26	356.10	2,589.92	20.70	-88.42	20.70	10.00	-9.94	2.74	6.72
2,650.00	30.24	356.05	2,634.16	43.81	-90.20	43.91	10.00	-9.96	1.89	5.48
2,700.00	35.23	356.74	2,676.20	70.88	-91.89	70.88	10.00	-9.97	1.40	4.62
2,750.00	40.22	357.29	2,715.74	101.42	-93.47	101.42	10.00	-9.98	1.09	4.04
2,800.00	45.21	357.73	2,752.48	135.30	-94.94	135.30	10.00	-9.98	0.88	3.60
2,850.00	50.20	358.10	2,786.10	172.25	-96.27	172.25	10.00	-9.98	0.74	3.28
2,900.00	55.19	358.42	2,816.39	211.99	-97.48	211.99	10.00	-9.99	0.64	3.03
2,950.00	60.18	358.71	2,843.11	254.22	-98.53	254.22	10.00	-9.99	0.57	2.83
3,000.00	65.18	358.97	2,866.04	298.62	-99.43	298.62	10.00	-9.99	0.51	2.68
3,050.00	70.18	359.20	2,885.03	344.86	-100.16	344.86	10.00	-9.99	0.47	2.56
3,100.00	75.17	359.43	2,899.91	392.57	-100.73	392.57	10.00	-9.99	0.45	2.47
3,150.00	80.17	359.64	2,910.58	441.40	-101.13	441.40	10.00	-9.99	0.43	2.41
3,200.00	85.17	359.85	2,916.96	490.97	-101.35	490.97	10.00	-9.99	0.41	2.36
3,248.38	90.00	0.04	2,919.00	539.30	-101.40	539.30	10.00	-9.99	0.41	2.33
3,300.00	90.00	0.04	2,919.00	590.92	-101.36	590.92	0.00	0.00	0.00	0.00
3,400.00	90.00	0.04	2,919.00	690.92	-101.29	690.92	0.00	0.00	0.00	0.00
3,500.00	90.00	0.04	2,919.00	790.92	-101.21	790.92	0.00	0.00	0.00	0.00
3,600.00	90.00	0.04	2,919.00	890.92	-101.14	890.92	0.00	0.00	0.00	0.00
3,700.00	90.00	0.04	2,919.00	890.92	-101.06	990.92	0.00	0.00	0.00	0.00
3,800.00	90.00	0.04	2,919.00	1,090.92	-100.99	1,090.92	0.00	0.00	0.00	0.00
3,900.00	90.00	0.04	2,919.00	1,190.92	-100.91	1,190.92	0.00	0.00	0.00	0.00
4,000.00	90.00	0.04	2,919.00	1,290.92	-100.84	1,290.92	0.00	0.00	0.00	0.00



WBDS Standard Planning Report



Company:	Percussion Petroleum, LLC	Local Co-ordinate Reference:	Well #19H - Slot 19
Project:	Eddy County, NM	TVD Reference:	RKB = 17' @ 3489.00usft
Site:	Osage Boyd 15 FED COM	MD Reference:	RKB = 17' @ 3489.00usft
Well:	#19H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	Plan #1	Database:	WBDS_SQL_2

MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	N/S (usft)	EW (usft)	V. Sec (usft)	DLeg (°/100ft)	Build (°/100ft)	Turn (°/100ft)	TFace (°)
4,100.00	90.00	0.04	2,919.00	1,390.92	-100.76	1,390.92	0.00	0.00	0.00	0.00
4,200.00	90.00	0.04	2,919.00	1,490.92	-100.69	1,490.92	0.00	0.00	0.00	0.00
4,300.00	90.00	0.04	2,919.00	1,590.92	-100.61	1,590.92	0.00	0.00	0.00	0.00
4,400.00	90.00	0.04	2,919.00	1,690.92	-100.54	1,690.92	0.00	0.00	0.00	0.00
4,500.00	90.00	0.04	2,919.00	1,790.92	-100.46	1,790.92	0.00	0.00	0.00	0.00
4,600.00	90.00	0.04	2,919.00	1,890.92	-100.39	1,890.92	0.00	0.00	0.00	0.00
4,700.00	90.00	0.04	2,919.00	1,990.92	-100.32	1,990.92	0.00	0.00	0.00	0.00
4,800.00	90.00	0.04	2,919.00	2,090.92	-100.24	2,090.92	0.00	0.00	0.00	0.00
4,900.00	90.00	0.04	2,919.00	2,190.92	-100.17	2,190.92	0.00	0.00	0.00	0.00
5,000.00	90.00	0.04	2,919.00	2,290.92	-100.09	2,290.92	0.00	0.00	0.00	0.00
5,100.00	90.00	0.04	2,919.00	2,390.92	-100.02	2,390.92	0.00	0.00	0.00	0.00
5,200.00	90.00	0.04	2,919.00	2,490.92	-99.94	2,490.92	0.00	0.00	0.00	0.00
5,300.00	90.00	0.04	2,919.00	2,590.92	-99.87	2,590.92	0.00	0.00	0.00	0.00
5,400.00	90.00	0.04	2,919.00	2,690.92	-99.79	2,690.92	0.00	0.00	0.00	0.00
5,500.00	90.00	0.04	2,919.00	2,790.92	-99.72	2,790.92	0.00	0.00	0.00	0.00
5,600.00	90.00	0.04	2,919.00	2,890.92	-99.64	2,890.92	0.00	0.00	0.00	0.00
5,700.00	90.00	0.04	2,919.00	2,990.92	-99.57	2,990.92	0.00	0.00	0.00	0.00
5,800.00	90.00	0.04	2,919.00	3,090.92	-99.49	3,090.92	0.00	0.00	0.00	0.00
5,900.00	90.00	0.04	2,919.00	3,190.92	-99.42	3,190.92	0.00	0.00	0.00	0.00
6,000.00	90.00	0.04	2,919.00	3,290.92	-99.34	3,290.92	0.00	0.00	0.00	0.00
6,100.00	90.00	0.04	2,919.00	3,390.92	-99.27	3,390.92	0.00	0.00	0.00	0.00
6,200.00	90.00	0.04	2,919.00	3,490.92	-99.19	3,490.92	0.00	0.00	0.00	0.00
6,300.00	90.00	0.04	2,919.00	3,590.92	-99.12	3,590.92	0.00	0.00	0.00	0.00
6,400.00	90.00	0.04	2,919.00	3,690.92	-99.05	3,690.92	0.00	0.00	0.00	0.00
6,480.28	90.00	0.04	2,919.00	3,751.20	-99.00	3,751.20	0.00	0.00	0.00	0.00
6,486.02	90.50	359.90	2,918.89	3,776.94	-99.01	3,776.94	2.00	1.92	-0.54	-15.76
6,500.00	90.50	359.90	2,918.77	3,780.92	-99.04	3,790.92	0.00	0.00	0.00	0.00



WBDS Standard Planning Report



Company:	Percussion Petroleum, LLC	Local Co-ordinate Reference:	Well #19H - Slot 19
Project:	Eddy County, NM	TVD Reference:	RKB = 17' @ 3489.00usft
Site:	Osage Boyd 15 FED COM	MD Reference:	RKB = 17' @ 3489.00usft
Well:	#19H	North Reference:	Grid
Wellbore:	OH*	Survey Calculation Method:	Minimum Curvature
Design:	Plan #1	Database:	WBDS_SQL_2

MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	N/S (usft)	E/W (usft)	V. Sec (usft)	DLeg (°/100ft)	Build (°/100ft)	Turn (°/100ft)	TFace (°)
6,600.00	90.50	359.90	2,917.90	3,890.91	:99.21	3,890.91	0.00	0.00	0.00	0.00
6,700.00	90.50	359.90	2,917.04	3,990.91	:99.37	3,990.91	0.00	0.00	0.00	0.00
6,800.00	90.50	359.90	2,916.17	4,090.90	:99.54	4,090.90	0.00	0.00	0.00	0.00
6,900.00	90.50	359.90	2,915.31	4,190.90	:99.71	4,190.90	0.00	0.00	0.00	0.00
7,000.00	90.50	359.90	2,914.44	4,290.90	:99.88	4,290.90	0.00	0.00	0.00	0.00
7,100.00	90.50	359.90	2,913.58	4,390.89	:100.05	4,390.89	0.00	0.00	0.00	0.00
7,200.00	90.50	359.90	2,912.72	4,490.89	:100.22	4,490.89	0.00	0.00	0.00	0.00
7,300.00	90.50	359.90	2,911.85	4,590.88	:100.39	4,590.88	0.00	0.00	0.00	0.00
7,400.00	90.50	359.90	2,910.99	4,690.88	:100.56	4,690.88	0.00	0.00	0.00	0.00
7,500.00	90.50	359.90	2,910.12	4,790.88	:100.73	4,790.88	0.00	0.00	0.00	0.00
7,600.00	90.50	359.90	2,909.26	4,890.87	:100.90	4,890.87	0.00	0.00	0.00	0.00
7,700.00	90.50	359.90	2,908.39	4,990.87	:101.07	4,990.87	0.00	0.00	0.00	0.00
7,800.00	90.50	359.90	2,907.53	5,090.87	:101.24	5,090.87	0.00	0.00	0.00	0.00
7,900.00	90.50	359.90	2,906.66	5,190.86	:101.41	5,190.86	0.00	0.00	0.00	0.00
8,000.00	90.50	359.90	2,905.80	5,290.86	:101.58	5,290.86	0.00	0.00	0.00	0.00
8,100.00	90.50	359.90	2,904.93	5,390.85	:101.75	5,390.85	0.00	0.00	0.00	0.00
8,190.83	90.50	359.90	2,904.15	5,481.68	:101.90	5,481.68	0.00	0.00	0.00	0.00
8,200.00	90.36	359.78	2,904.08	5,490.85	:101.93	5,490.85	2.00	-1.44	-1.38	-136.19
8,225.15	90.00	359.43	2,904.00	5,516.00	:102.10	5,516.00	2.00	-1.44	-1.38	-136.19
8,305.26	90.00	359.43	2,904.00	5,596.10	:102.90	5,596.10	0.00	0.00	0.00	0.00

Checked By: _____ Approved By: _____ Date: _____



PERCUSSION
PETROLEUM
LLC

Percussion Petroleum, LLC

Eddy County, NM

Osage Boyd 15 FED COM

#19H


OH

Plan #1

Anticollision Report

20 July, 2018

WELLBENDERS
DIRECTIONAL SERVICES



Company:	Percussion Petroleum, LLC	Local Co-ordinate Reference:	Well #19H - Slot 19
Project:	Eddy County, NM	TVD Reference:	RKB = 17' @ 3489.00usft
Reference Site:	Osage Boyd 15 FED COM	MD Reference:	RKB = 17' @ 3489.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	#19H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at:	2.00 sigma
Reference Wellbore:	OH	Database:	WBDS_SQL_2
Reference Design:	Plan #1	Offset TVD Reference:	Reference Datum

Reference	Plan #1
Filter type:	NO GLOBAL FILTER: Using user defined selection & filtering criteria
Interpolation Method:	Stations
Depth Range:	0.00 to 8,305.26usft
Results Limited by:	Maximum center-center distance of 1,000.00 usft
Warning Levels Evaluated at:	2:00 Sigma
Error Model:	ISCWSA
Scan Method:	Closest Approach 3D
Error Surface:	Pedal Curve
Casing Method:	Not applied

Survey Tool Program	Date	07/20/18
From (usft)	To (usft)	Survey (Wellbore)
0.00	8,305.26	Plan #1 (OH)
		Tool Name
		MWD+IGRF
		Description
		OWSG-MWD + IGRF or WMM

Site Name	Reference Measured Depth (usft)	Offset Measured Depth (usft)	Distance Between Centres (usft)	Distance Between Ellipses (usft)	Separation Factor	Warning
Osage Boyd 15 FED COM						
#18H - OH - Plan #1	656.31	657.06	17.96	13.71	4.230	CC
#18H - OH - Plan #1	700.00	700.72	18.04	13.48	3.958	ES
#18H - OH - Plan #1	8,305.26	8,515.20	234.46	109.15	1.871	SF

Osage Boyd 15 FED COM - #18H - OH - Plan #1													Offset Site Error	0.00 usft
Survey Program: 0-MWD+IGRF													Offset Well Error	0.00 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/S (usft)	+E/W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning	
0.00	0.00	1.00	0.00	0.00	0.00	179.43	-20.20	0.20	20.20					
100.00	100.00	101.00	100.00	0.15	0.15	179.43	-20.20	0.20	20.20	19.90	0.30	67.087		
200.00	200.00	201.00	200.00	0.51	0.51	179.43	-20.20	0.20	20.20	18.18	1.02	19.843		
300.00	300.00	301.00	300.00	0.87	0.87	179.43	-20.20	0.20	20.20	18.47	1.74	11.643		
350.00	350.00	351.00	350.00	1.04	1.05	179.43	-20.20	0.20	20.20	18.11	2.09	9.650		
400.00	400.00	400.97	399.97	1.22	1.22	-67.17	-20.24	-0.25	20.07	17.62	2.44	8.218		
476.64	476.60	477.57	476.53	1.48	1.49	-66.58	-20.43	-2.63	19.33	16.36	2.97	6.509		
500.00	499.94	500.91	499.84	1.56	1.57	-66.03	-20.53	-3.76	19.02	15.88	3.13	6.071		
600.00	599.84	600.80	599.49	1.91	1.93	-57.11	-21.09	-10.60	18.09	14.25	3.84	4.710		
658.31	658.09	657.06	655.58	2.12	2.14	-50.19	-21.45	-14.97	17.98	13.71	4.25	4.230	CC	
700.00	699.74	700.72	699.11	2.27	2.30	-44.81	-21.73	-18.36	18.04	13.48	4.58	3.958	ES	
800.00	799.64	800.65	798.73	2.63	2.67	-32.99	-22.37	-26.12	18.80	13.53	5.27	3.567		
900.00	899.55	900.57	898.35	3.00	3.05	-22.50	-23.01	-33.88	20.29	14.30	5.98	3.392		
1,000.00	999.45	1,000.50	997.97	3.36	3.43	-13.68	-23.64	-41.64	22.35	15.66	6.69	3.341		
1,100.00	1,099.35	1,100.42	1,097.59	3.72	3.81	-6.49	-24.28	-49.40	24.85	17.45	7.40	3.359		
1,200.00	1,199.25	1,200.35	1,197.22	4.09	4.19	-0.69	-24.92	-57.16	27.67	19.56	8.11	3.412		
1,300.00	1,299.15	1,300.27	1,296.84	4.46	4.58	4.01	-25.56	-64.92	30.71	21.89	8.82	3.481		
1,400.00	1,399.06	1,400.20	1,396.46	4.82	4.96	7.83	-26.20	-72.68	33.93	24.39	9.54	3.557		
1,500.00	1,498.96	1,500.12	1,496.08	5.19	5.34	10.99	-26.84	-80.44	37.27	27.01	10.26	3.633		
1,600.00	1,598.86	1,600.05	1,595.70	5.56	5.73	13.61	-27.48	-88.20	40.71	29.73	10.89	3.707		
1,700.00	1,698.76	1,700.03	1,695.32	5.92	6.11	15.83	-28.12	-95.95	44.21	32.51	11.70	3.778		
1,800.00	1,798.67	1,800.10	1,794.94	6.29	6.50	17.72	-28.75	-103.71	47.78	35.35	12.43	3.845		
1,900.00	1,898.57	1,900.18	1,894.57	6.66	6.88	19.34	-29.39	-111.47	51.38	38.23	13.15	3.907		
2,000.00	1,998.47	2,000.25	1,994.19	7.02	7.27	20.75	-30.03	-119.23	55.03	41.15	13.88	3.966		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision-Report



Company:	Percussion Petroleum, LLC	Local Co-ordinate Reference:	Well #19H - Slot.19
Project:	Eddy County, NM	TVD Reference:	RKB = 17' @ 3489.00usft
Reference Site:	Osage Boyd 15 FED COM	MD Reference:	RKB = 17' @ 3489.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	#19H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore:	OH	Database:	WBDS_SQL_2
Reference Design:	Plan #1	Offset TVD Reference:	Reference Datum

Offset Design: Osage Boyd 15 FED COM - #18H - OH - Plan #1													Offset Site Error:	0.00 usft
Survey Program: O-MWD-HGRF													Offset Well Error:	0.00 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Semi Major Axis Reference (usft)	Offset (usft)	Highside Footcandle (°)	Offset Wellbore Centre N-S (usft)	Offset Wellbore Centre E-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning	
2,100.00	2,098.37	2,100.33	2,093.81	7.39	7.66	21.98	-30.87	-126.99	58.70	44.10	14.60	4.020		
2,200.00	2,198.28	2,200.40	2,193.43	7.76	8.04	23.07	-31.31	-134.75	62.40	47.07	15.33	4.070		
2,300.00	2,298.18	2,299.52	2,293.05	8.13	8.42	24.04	-31.95	-142.51	66.11	50.06	16.05	4.118		
2,338.37	2,336.51	2,337.87	2,331.29	8.27	8.57	24.38	-32.19	-145.49	67.54	51.21	16.33	4.136		
2,350.00	2,348.13	2,349.49	2,342.86	8.31	8.62	24.82	-32.27	-146.39	67.97	51.56	16.42	4.141		
2,400.00	2,398.02	2,400.83	2,392.59	8.49	8.81	26.56	-32.59	-150.26	69.83	53.06	16.77	4.165		
2,450.00	2,447.52	2,448.83	2,441.90	8.66	8.90	28.14	-32.90	-154.10	72.13	55.04	17.09	4.220		
2,500.00	2,496.24	2,502.51	2,490.41	8.82	9.21	29.03	-33.21	-157.88	76.02	58.56	17.45	4.355		
2,550.00	2,543.83	2,544.99	2,537.77	8.99	9.37	29.23	-33.52	-161.57	82.98	65.15	17.82	4.655		
2,600.00	2,589.92	2,594.67	2,587.28	9.15	9.58	29.56	-32.44	-165.44	93.61	75.34	18.27	5.124		
2,650.00	2,634.16	2,646.83	2,638.95	9.32	9.78	29.91	-28.78	-169.49	106.33	87.65	18.68	5.692		
2,700.00	2,676.20	2,701.02	2,691.85	9.51	9.95	29.28	-15.90	-173.68	120.28	101.29	18.99	6.335		
2,750.00	2,715.74	2,757.45	2,745.58	9.73	10.17	29.23	0.87	-177.96	134.84	115.68	19.16	7.037		
2,800.00	2,752.46	2,816.29	2,799.62	10.00	10.39	29.10	23.52	-182.30	149.50	130.32	19.18	7.796		
2,850.00	2,786.10	2,877.73	2,853.22	10.32	10.63	29.16	53.17	-186.65	163.88	144.83	19.04	8.608		
2,900.00	2,818.39	2,941.89	2,905.48	10.69	10.90	29.58	90.09	-190.94	177.57	158.83	18.74	9.477		
2,950.00	2,843.11	3,008.86	2,955.27	11.10	11.24	29.49	134.62	-195.07	190.28	171.98	18.30	10.400		
3,000.00	2,866.04	3,078.62	3,001.26	11.57	11.68	29.98	186.87	-198.98	201.69	183.95	17.74	11.367		
3,050.00	2,885.03	3,151.04	3,041.95	12.09	12.23	29.12	248.63	-202.47	211.52	194.39	17.13	12.349		
3,100.00	2,899.91	3,225.87	3,075.74	12.66	12.91	29.95	313.26	-205.49	219.50	202.96	16.54	13.271		
3,150.00	2,910.58	3,302.69	3,101.13	13.26	13.72	29.49	385.66	-207.89	225.42	209.35	16.07	14.025		
3,200.00	2,916.96	3,380.93	3,116.84	13.91	14.64	29.76	462.23	-209.55	229.09	213.24	15.85	14.454		
3,248.38	2,919.00	3,457.38	3,122.00	14.55	15.61	29.77	538.43	-210.40	230.41	214.46	15.95	14.444		
3,300.00	2,919.00	3,509.22	3,122.00	15.27	16.31	29.69	590.29	-210.70	230.57	213.75	16.82	13.711		
3,400.00	2,919.00	3,609.22	3,122.00	16.75	17.74	29.55	690.28	-211.27	230.89	212.27	18.61	12.407		
3,500.00	2,919.00	3,709.22	3,122.00	18.31	19.25	29.41	790.28	-211.85	231.19	210.67	20.52	11.267		
3,600.00	2,919.00	3,809.21	3,122.00	19.93	20.83	29.27	890.28	-212.43	231.51	208.99	22.52	10.281		
3,700.00	2,919.00	3,909.21	3,122.00	21.59	22.46	29.13	990.27	-213.00	231.82	207.23	24.59	9.428		
3,800.00	2,919.00	4,009.21	3,122.00	23.30	24.13	29.00	1,090.27	-213.58	232.13	205.42	26.72	8.688		
3,900.00	2,919.00	4,109.21	3,122.00	25.04	25.83	28.85	1,190.26	-214.16	232.45	203.58	28.90	8.045		
4,000.00	2,919.00	4,209.20	3,122.00	26.80	27.57	28.71	1,290.26	-214.73	232.77	201.66	31.11	7.482		
4,100.00	2,919.00	4,309.20	3,122.00	28.58	29.32	28.57	1,390.26	-215.31	233.09	199.73	33.36	6.987		
4,200.00	2,919.00	4,409.20	3,122.00	30.37	31.10	28.43	1,490.25	-215.89	233.41	197.77	35.64	6.548		
4,300.00	2,919.00	4,509.20	3,122.00	32.18	32.89	28.29	1,590.25	-216.46	233.73	195.78	37.95	6.159		
4,400.00	2,919.00	4,609.20	3,122.00	34.01	34.70	28.15	1,690.24	-217.04	234.06	193.77	40.28	5.819		
4,500.00	2,919.00	4,709.19	3,122.00	35.84	36.51	28.01	1,790.24	-217.62	234.38	191.74	42.64	5.497		
4,600.00	2,919.00	4,809.19	3,122.00	37.68	38.34	27.87	1,890.24	-218.20	234.71	189.70	45.01	5.215		
4,700.00	2,919.00	4,909.19	3,122.00	39.53	40.17	27.74	1,990.23	-218.77	235.04	187.63	47.40	4.958		
4,800.00	2,919.00	5,009.19	3,122.00	41.38	42.01	27.60	2,090.23	-219.35	235.36	185.55	49.81	4.725		
4,900.00	2,919.00	5,109.19	3,122.00	43.24	43.86	27.46	2,190.23	-219.93	235.69	183.46	52.24	4.512		
5,000.00	2,919.00	5,209.18	3,122.00	45.10	45.71	27.33	2,290.22	-220.50	236.03	181.35	54.68	4.316		
5,100.00	2,919.00	5,309.18	3,122.00	46.97	47.57	27.19	2,390.22	-221.08	236.36	179.22	57.14	4.137		
5,200.00	2,919.00	5,409.18	3,122.00	48.84	49.44	27.05	2,490.21	-221.66	236.69	177.08	59.61	3.971		
5,300.00	2,919.00	5,509.18	3,122.00	50.71	51.30	26.92	2,590.21	-222.23	237.03	174.93	62.10	3.817		
5,400.00	2,919.00	5,609.18	3,122.00	52.59	53.17	26.78	2,690.21	-222.81	237.37	172.77	64.59	3.675		
5,500.00	2,919.00	5,709.17	3,122.00	54.47	55.05	26.65	2,790.20	-223.39	237.71	170.60	67.11	3.542		
5,600.00	2,919.00	5,809.17	3,122.00	56.36	56.92	26.52	2,890.20	-223.96	238.05	168.41	69.63	3.419		
5,700.00	2,919.00	5,909.17	3,122.00	58.24	58.80	26.39	2,990.20	-224.54	238.39	166.22	72.17	3.303		
5,800.00	2,919.00	6,009.17	3,122.00	60.13	60.69	26.25	3,090.19	-225.12	238.73	164.01	74.72	3.195		
5,900.00	2,919.00	6,109.16	3,122.00	62.02	62.57	26.12	3,190.19	-225.70	239.07	161.79	77.28	3.094		
6,000.00	2,919.00	6,209.16	3,122.00	63.91	64.45	26.00	3,290.18	-226.27	239.42	159.56	79.85	2.998		
6,100.00	2,919.00	6,309.16	3,122.00	65.80	66.34	25.87	3,390.18	-226.85	239.76	157.32	82.44	2.908		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



Company:	Percussion Petroleum, LLC	Local Co-ordinate Reference:	Well #19H - Slot 19
Project:	Eddy County, NM	TVD Reference:	RKB = 17 @ 3489.00usft
Reference Site:	Osage Boyd 15 FED.COM	MD Reference:	RKB = 17 @ 3489.00usft
Site Error:	0:00 usft	North Reference:	Grid
Reference Well:	#19H	Survey Calculation Method:	Minimum Curvature
Well Error:	0:00 usft	Output errors are at:	2:00 sigma
Reference Wellbore:	OH	Database:	WBDS_SQL_2
Reference Design:	Plan #1	Offset TVD Reference:	Reference Datum


Offset Design: Osage Boyd 15 FED.COM - #18H - OH - Plan #1													Offset Site Error:	0.00 usft
Survey Program: O-MWD+GRF													Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis			Distance						Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N-S (usft)	+E-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
6,200.00	2,919.00	6,409.16	3,122.00	67.69	68.23	-147.72	3,490.18	-227.43	240.11	155.07	85.04	2.824		
6,300.00	2,919.00	6,509.16	3,122.00	69.58	70.12	-147.59	3,590.17	-228.00	240.46	152.82	87.64	2.744		
6,400.00	2,919.00	6,609.15	3,122.00	71.48	72.01	-147.46	3,690.17	-228.58	240.81	150.55	90.26	2.668		
6,460.28	2,919.00	6,672.25	3,121.89	72.62	73.21	-147.42	3,753.27	-228.65	240.79	149.05	91.74	2.625		
6,486.02	2,918.89	6,698.37	3,121.75	73.11	73.70	-147.47	3,779.38	-228.39	240.62	148.34	92.28	2.608		
6,500.00	2,918.77	6,712.35	3,121.67	73.37	73.96	-147.51	3,793.36	-228.25	240.57	148.01	92.56	2.599		
6,600.00	2,917.90	6,812.34	3,121.10	75.27	75.85	-147.79	3,893.34	-227.25	240.19	145.64	94.55	2.540		
6,700.00	2,917.04	6,912.33	3,120.54	77.17	77.74	-148.06	3,993.33	-226.25	239.82	143.30	96.52	2.489		
6,800.00	2,916.17	7,012.33	3,119.97	79.07	79.64	-148.34	4,093.32	-225.24	239.46	140.99	98.47	2.432		
6,900.00	2,915.31	7,112.32	3,119.41	80.97	81.53	-148.61	4,193.30	-224.24	239.10	138.70	100.40	2.382		
7,000.00	2,914.44	7,212.31	3,118.84	82.88	83.42	-148.89	4,293.29	-223.24	238.75	136.45	102.30	2.334		
7,100.00	2,913.58	7,312.30	3,118.28	84.78	85.32	-149.17	4,393.28	-222.24	238.40	134.22	104.19	2.288		
7,200.00	2,912.72	7,412.30	3,117.71	86.68	87.21	-149.45	4,493.26	-221.23	238.06	132.02	106.05	2.245		
7,300.00	2,911.85	7,512.29	3,117.15	88.58	89.11	-149.73	4,593.25	-220.23	237.73	129.84	107.88	2.204		
7,400.00	2,910.99	7,612.28	3,116.58	90.49	91.00	-150.01	4,693.23	-219.23	237.40	127.70	109.70	2.164		
7,500.00	2,910.12	7,712.27	3,116.02	92.39	92.90	-150.29	4,793.22	-218.22	237.07	125.58	111.49	2.126		
7,600.00	2,909.26	7,812.27	3,115.45	94.30	94.80	-150.57	4,893.21	-217.22	236.75	123.49	113.27	2.090		
7,700.00	2,908.39	7,912.26	3,114.89	96.20	96.70	-150.86	4,993.19	-216.22	236.44	121.43	115.02	2.056		
7,800.00	2,907.53	8,012.25	3,114.32	98.11	98.60	-151.14	5,093.18	-215.22	236.14	119.39	116.74	2.023		
7,900.00	2,906.66	8,112.24	3,113.76	100.01	100.50	-151.42	5,193.16	-214.21	235.83	117.39	118.45	1.991		
8,000.00	2,905.80	8,212.24	3,113.19	101.92	102.40	-151.71	5,293.15	-213.21	235.54	115.41	120.13	1.961		
8,100.00	2,904.93	8,312.23	3,112.62	103.83	104.30	-152.00	5,393.14	-212.21	235.25	113.46	121.79	1.932		
8,190.83	2,904.15	8,403.05	3,112.11	105.58	106.03	-152.26	5,483.95	-211.30	234.99	111.71	123.28	1.906		
8,200.00	2,904.08	8,412.22	3,112.06	105.74	106.20	-152.28	5,483.12	-211.21	234.95	111.53	123.43	1.904		
8,225.15	2,904.00	8,443.30	3,112.00	106.22	106.79	-152.34	5,516.00	-211.10	234.83	110.84	123.95	1.894		
8,305.28	2,904.00	8,515.20	3,112.00	107.74	108.16	-152.52	5,596.10	-211.10	234.46	109.15	125.31	1.871 SF		

CC - Min centre to center distance or convergent point; SF - min separation factor; ES - min ellipse separation

Company:	Percussion Petroleum, LLC	Local Co-ordinate Reference:	Well #19H - Slot 19
Project:	Eddy County, NM	TVD Reference:	RKB = 17' @ 3489.00usft
Reference Site:	Osage, Boyd 15 FED COM	MD Reference:	RKB = 17' @ 3489.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	#19H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at:	2.00 sigma
Reference Wellbore:	OH	Database:	WBDS_SQL_2
Reference Design:	Plan #1	Offset TVD Reference:	Reference Datum

Reference Depths are relative to RKB = 17' @ 3489.00usft
 Offset Depths are relative to Offset Datum
 Central Meridian is -104.333334

Coordinates are relative to: #19H - Slot 19
 Coordinate System is US State Plane 1983, New Mexico Eastern Zone
 Grid Convergence at Surface is: -0.08°

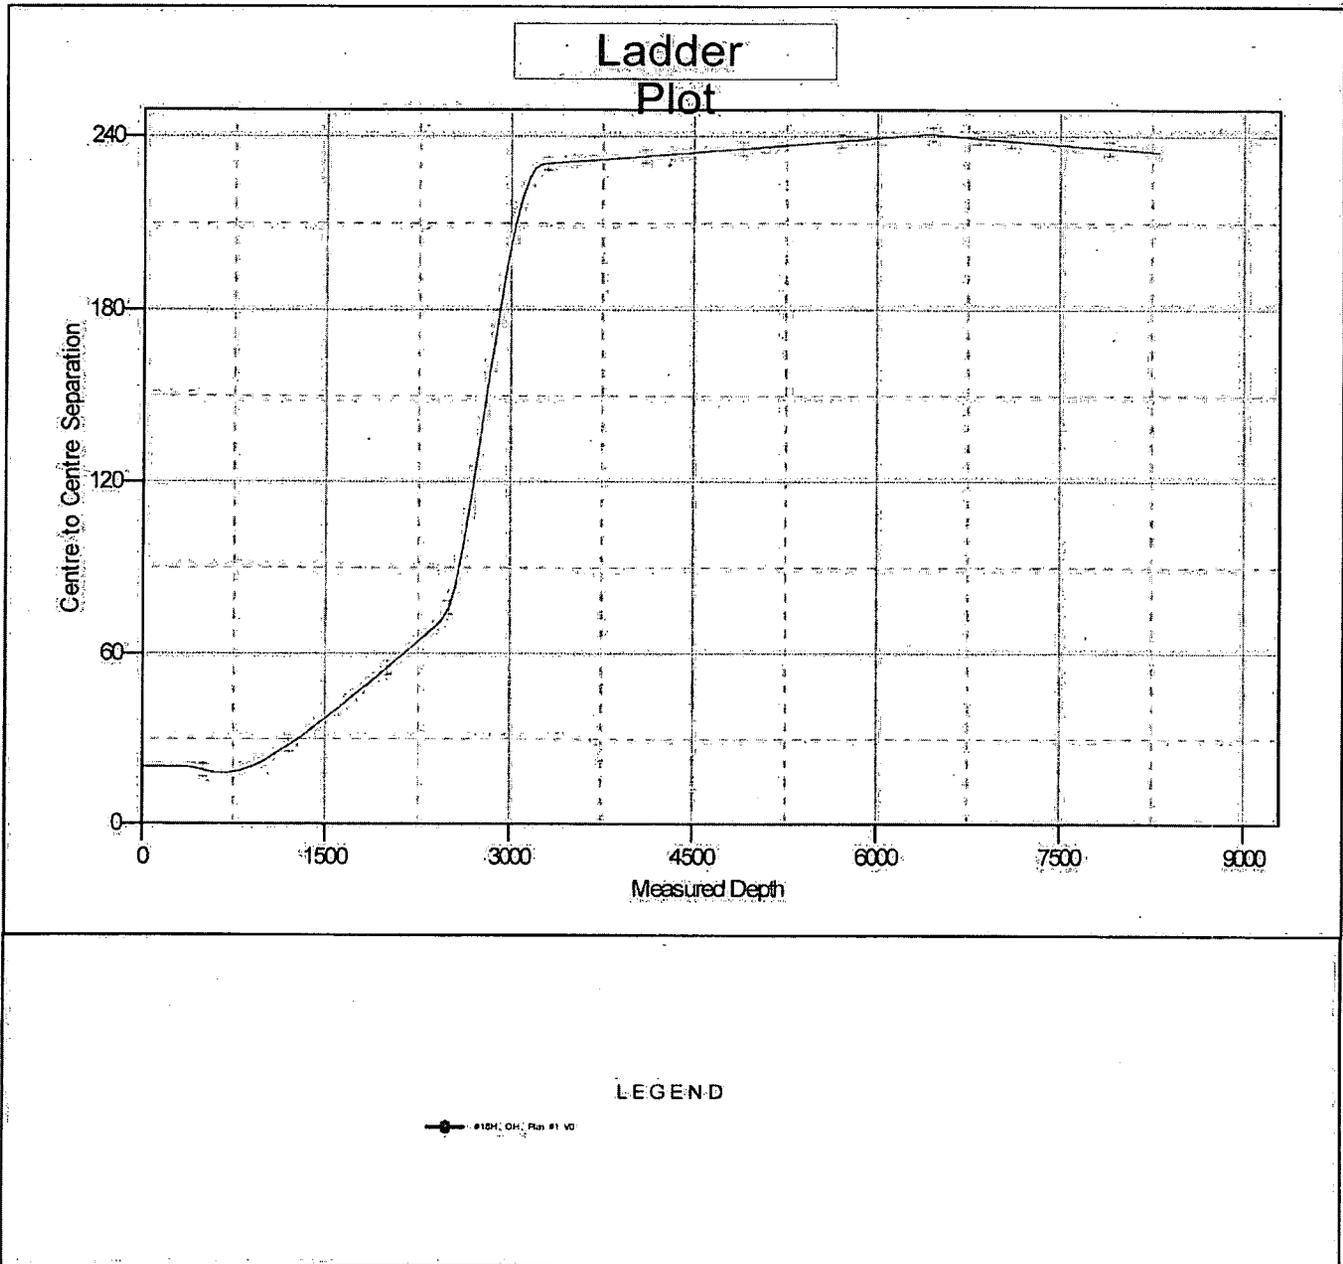

Company:	Percussion Petroleum, LLC	Local Co-ordinate Reference:	Well #19H - Slot 19
Project:	Eddy County, NM	TVD Reference:	RKB = 17' @ 3489.00usft
Reference Site:	Osage Boyd 15 FED COM	MD Reference:	RKB = 17' @ 3489.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	#19H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at:	2.00 sigma
Reference Wellbore:	OH	Database:	WBDS_SQL_2
Reference Design:	Plan #1	Offset TVD Reference:	Reference Datum

Reference Depths are relative to RKB = 17' @ 3489.00usft.

Coordinates are relative to: #19H - Slot 19


Offset Depths are relative to Offset Datum

Coordinate System is US State Plane 1983 New Mexico Eastern Zone

Central Meridian is -104.333334

Grid Convergence at Surface is -0.08°

Separation Factor Plot

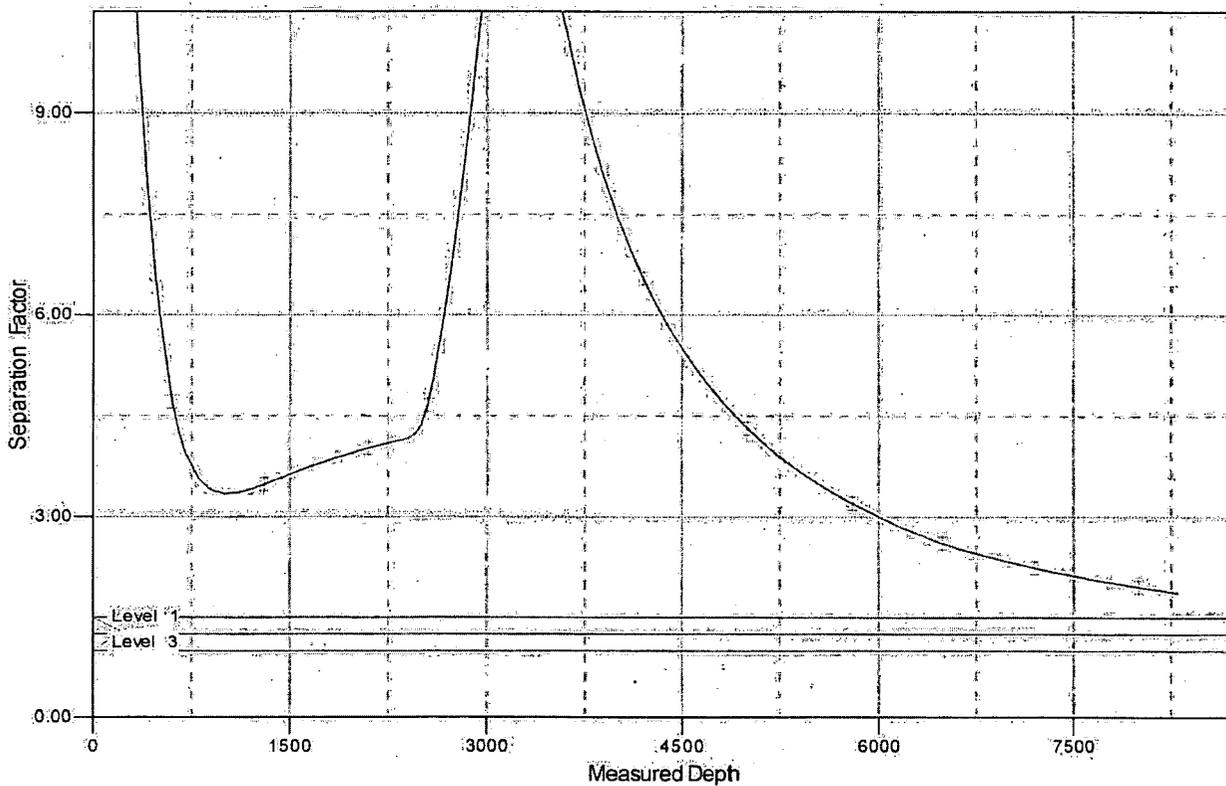

LEGEND

● #19H - OH, Plan #1 10

Contingency Planning – Osage Federal Area Wells

Prepared by Lelan J. Anders, Percussion Petroleum Operating, LLC.

INTRODUCTION:

This document is designed to address the issues that could arise at any time drilling horizontal Yeso wells. Percussion Petroleum Operating (PPO) is going to follow regularly used practices and procedures in order to drill the wells to TD and still keep them economical to operate.

SCENARIO:

If a complete loss of circulation occurs while drilling above 400 ft MD.

CORRECTIVE ACTIONS:

1. Pump an LCM sweep and attempt to regain circulation – if unsuccessful go to step 2
2. Continue drilling at attempt to seal off lost circulation zone with drill cuttings
 1. Monitor torque and drag on drill string to determine if pipe is sticking
 2. Have contingency plan to 'drill dry' – have plenty of water on hand and well control in place
 3. Continue to 'dry drill' until torque and drag dictate a different plan
3. If 'dry drilling' is unsuccessful – Run contingency surface casing string
 1. Ream out 12-1/4" open hole to 17-1/2" open hole
 2. Run contingency 13-3/8" 48# H-40, STC casing to no more than 400' MD
 3. Cement 13-3/8" casing using Class C cement
 - i. Pump at minimum 200% excess cement
 1. 400 sks 65/35/6 Class C Cement, 12.8 ppg, 1.87 yield, 10.15 gal/sk to be used on initial cement job.
 - ii. Top off cement from surface using 1" if necessary
 1. Top off will be 200 sks of 65/35/6 Class C Cement, 12.8 ppg, 1.87 yield, 10.15 gal/sk
 2. Second top off will be performed with same cement if needed.
 - iii. Insure that cement has cured for a minimum of 12 hours prior to drilling out
 4. Install 13-3/8" 3M wellhead and drill to surface casing depth with 12-1/4" OD bit
 5. Run and cement surface casing as planned

Percussion Petroleum Operating, LLC
 Osage Boyd 15 Federal Com 19H
 SHL: 431' FNL & 2370' FWL 22-19S-25E
 BHL: 20' FNL & 2269' FWL 15-19S-25E
 Eddy County, NM

DRILL PLAN PAGE 1

Drilling Program

1. ESTIMATED TOPS

Formation/Lithology	TVD	MD	Contents
Quaternary caliche	000'	000'	water
Grayburg dolomite	602'	602'	hydrocarbons
San Andres dolomite (surf. csg. @ 1279' in up San Andres)	787'	787'	hydrocarbons
(KOP)	2337'	2338'	hydrocarbons)
Glorieta silty dolomite	2347'	2349'	hydrocarbons
Yeso (aka, Paddock) dolomite (pro. csg. @ 8305' MD in Yeso)	2502'	2508'	hydrocarbons
TD (Yeso bottom @ 3150' TVD)	2904'	8305'	hydrocarbons

2. NOTABLE ZONES

Yeso is the goal. Closest water well (RA 02909) is 3421' southwest. Water bearing strata were found at 120' in this 188' deep well.

3. PRESSURE CONTROL

A 3000-psi 5000' rated BOP stack consisting of annular preventer and double (blind and pipe) ram will be used below surface casing to TD. See attached BOP and choke manifold diagrams.

Pressure tests will be conducted before drilling out from under all casing strings. Third party test crews will conduct all tests. All tests will be recorded for 10-minutes on low pressure (500 psi) and 10-minutes on high pressure (3000-psi). After BOP testing is complete, test casing (without test plug) to 2000-psi for 30 minutes. All tests will be charted on a plot. BOPs will be function tested every day.

Percussion Petroleum Operating, LLC
 Osage Boyd 15 Federal Com 19H
 SHL: 431' FNL & 2370' FWL 22-19S-25E
 BHL: 20' FNL & 2269' FWL 15-19S-25E
 Eddy County, NM

DRILL PLAN PAGE 2

4. CASING & CEMENT

All casing will be API and new. A contingency plan is attached.

Hole O. D.	Set MD	Set TVD	Casing O. D.	Weight (lb/ft)	Grade	Joint	Collapse	Burst	Tension
12.25"	0' - 1279'	0' - 1278'	Surface 9.625"	36	J-55	LTC	1.125	1.125	1.8
8.75"	0' - 2650'	0' - 2634'	Prod. 1 7"	32	L-80	BTC	1.125	1.125	1.8
8.75"	2650' - 8305'	2634' - 2904'	Prod. 2 5.5"	17	L-80	BTC	1.125	1.125	1.8

Casing Name	Type	Sacks	Yield	Cu. Ft.	Weight	Blend
Surface	Lead	637	1.32	840	14.8	Class C + 2% CaCl + ¼ pound per sack celloflake
TOC = GL		100% Excess			Stop collar 10' above shoe with centralizer. One on 1st collar and every 4 th collar to GL.	
Production	Lead	495	1.97	975	12.6	65/65/6 Class C + 6% gel + 5% salt + ¼ pound per sack celloflake + 0.2% C41-P
	Tail	1375	1.32	1815	14.8	Class C + 2% CaCl + ¼ pound per sack celloflake
TOC = GL		50% Excess			Stop collar 10' above shoe with centralizer. One on 1st collar and every 10 collars to 1200' with 1 centralizer in 9.625" casing.	

5. MUD PROGRAM

An electronic/mechanical mud monitor with a minimum pit volume totalizer, stroke counter, and flow sensor will be used. All necessary mud products (LCM) will be on site to handle any abnormal hole condition that may be encountered while drilling this well. A closed loop system will be used.

Percussion Petroleum Operating, LLC
Osage Boyd 15 Federal Com 19H
SHL: 431' FNL & 2370' FWL 22-19S-25E
BHL: 20' FNL & 2269' FWL 15-19S-25E
Eddy County, NM

DRILL PLAN PAGE 3

Type	Interval (MD)	lb/gal	Viscosity	Fluid Loss	Plastic Viscosity	Yield Point
fresh water/gel	0' - 1279'	8.4 - 9.2	36-42	NC	3-5	5-7
fresh water/cut brine	1279' - 2338'	8.3 - 9.2	28-30	NC	1	1
cut brine	2338' - 8305'	8.6 - 9.2	29-32	NC	4-5	6-10

6. CORES, TESTS, & LOGS

No core or drill stem test is planned.

A mud logger will be used from GL to TD. Samples will be collected every 10' in the lateral pay zone.

No electric logs are planned at this time.

7. DOWN HOLE CONDITIONS

No abnormal pressure or temperature is expected. Maximum expected bottom hole pressure is ≈ 1252 psi. Expected bottom hole temperature is $\approx 114^\circ$ F.

A Hydrogen Sulfide Drilling Operation Plan is attached.

8. OTHER INFORMATION

Anticipated spud date is upon approval. It is expected it will take ≈ 1 month to drill and complete the well.

St. Devote LLC has operating rights in NMNM-060341. St. Devote LLC is a subsidiary of Percussion.



APD ID: 10400035427

Submission Date: 10/22/2018

Highlighted data
reflects the most
recent changes

Operator Name: PERCUSSION PETROLEUM OPERATING LLC

Well Name: OSAGE BOYD 15 FEDERAL COM

Well Number: 19H

[Show Final Text](#)

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - Existing Roads

Will existing roads be used? YES

Existing Road Map:

Osage_19H_Road_Map_20181022122035.pdf

Existing Road Purpose: ACCESS

Row(s) Exist? NO

ROW ID(s)

ID:

Do the existing roads need to be improved? YES

Existing Road Improvement Description: Upgrade will consist of filling potholes with caliche as needed.

Existing Road Improvement Attachment:

Section 2 - New or Reconstructed Access Roads

Will new roads be needed? NO

Section 3 - Location of Existing Wells

Existing Wells Map? YES

Attach Well map:

Osage_19H_Well_Map_20181022122054.pdf

Operator Name: PERCUSSION PETROLEUM OPERATING LLC

Well Name: OSAGE BOYD 15 FEDERAL COM

Well Number: 19H

Existing Wells description:

Section 4 - Location of Existing and/or Proposed Production Facilities

Submit or defer a Proposed Production Facilities plan? SUBMIT

Production Facilities description: A 739.4' long 4" O D. HDPE flow line will be laid on the surface south and southwest to a proposed central tank battery (CTB). CTB will sit on the south side of Percussion's existing three well Ross Ranch Goodman pad. Maximum operating pressure will be 125 psi. A 555.1' long overhead raptor safe 3-phase power line will be built southwest to an existing power line on the side of the CTB. A 1549.8' long 4" O D. HDPE crude oil line will be laid on the surface from the CTB southwest to an existing crude oil line at Percussion's Ross Ranch 22 #2 pad. Maximum operating pressure will be 125 psi.

Production Facilities map:

Osage_19H_Production_Facilities_20181022122132.pdf

Section 5 - Location and Types of Water Supply

Water Source Table

Water source use type: DUST CONTROL, INTERMEDIATE/PRODUCTION CASING, STIMULATION, SURFACE CASING

Water source type: GW WELL

Describe type:

Source longitude:

Source latitude:

Source datum:

Water source permit type: PRIVATE CONTRACT

Source land ownership: PRIVATE

Water source transport method: PIPELINE

Source transportation land ownership: PRIVATE

Water source volume (barrels): 10000

Source volume (acre-feet): 1.288931

Source volume (gal): 420000

Water source and transportation map:

Osage_19H_Water_Source_Map_20181022122202.pdf

Water source comments: Water will be piped via temporary 12,400' long surface 10" Kevlar lay flat pipelines (2) from Percussion's existing lined fresh water pond on its own land in NE4 26-19s-25e. Pipeline route will not be bladed or excavated. Route is all private. Route follows existing roads, pads, and pipelines.

New water well? NO

New Water Well Info

Well latitude:

Well Longitude:

Well datum:

Well target aquifer:

Operator Name: PERCUSSION PETROLEUM OPERATING LLC

Well Name: OSAGE BOYD 15 FEDERAL COM

Well Number: 19H

Est. depth to top of aquifer(ft):

Est thickness of aquifer:

Aquifer comments:

Aquifer documentation:

Well depth (ft):

Well casing type:

Well casing outside diameter (in.):

Well casing inside diameter (in.):

New water well casing?

Used casing source:

Drilling method:

Drill material:

Grout material:

Grout depth:

Casing length (ft.):

Casing top depth (ft.):

Well Production type:

Completion Method:

Water well additional information:

State appropriation permit:

Additional information attachment:

Section 6 - Construction Materials

Construction Materials description: NM One Call (811) will be notified before construction starts. Percussion will move its two surface lines north and east of the pad. Top 6" of soil and brush will be stockpiled east of the pad. V-door will face north. Closed loop drilling system will be used. Caliche will be hauled from existing caliche pit on private land. Arkland caliche pit is in NWNE 23-19s-25e.

Construction Materials source location attachment:

Osage_19H_Construction_Methods_20181022122217.pdf

Section 7 - Methods for Handling Waste

Waste type: DRILLING

Waste content description: Drill cuttings, mud, salts, and other chemicals

Amount of waste: 1000 barrels

Waste disposal frequency : Daily

Safe containment description: Steel tanks

Safe containmant attachment:

Waste disposal type: HAUL TO COMMERCIAL FACILITY **Disposal location ownership:** PRIVATE

Disposal type description:

Disposal location description: R360's state approved (NM-01-0006) disposal site at Halfway, NM

Reserve Pit

Reserve Pit being used? NO

Operator Name: PERCUSSION PETROLEUM OPERATING LLC

Well Name: OSAGE BOYD 15 FEDERAL COM

Well Number: 19H

Temporary disposal of produced water into reserve pit?

Reserve pit length (ft.)

Reserve pit width (ft.)

Reserve pit depth (ft.)

Reserve pit volume (cu. yd.)

Is at least 50% of the reserve pit in cut?

Reserve pit liner

Reserve pit liner specifications and installation description

Cuttings Area

Cuttings Area being used? NO

Are you storing cuttings on location? YES

Description of cuttings location Steel tanks on pad

Cuttings area length (ft.)

Cuttings area width (ft.)

Cuttings area depth (ft.)

Cuttings area volume (cu. yd.)

Is at least 50% of the cuttings area in cut?

WCuttings area liner

Cuttings area liner specifications and installation description

Section 8 - Ancillary Facilities

Are you requesting any Ancillary Facilities?: NO

Ancillary Facilities attachment:

Comments:

Section 9 - Well Site Layout

Well Site Layout Diagram:

Osage_19H_Well_Site_Layout_20181022122233.pdf

Comments:

Operator Name: PERCUSSION PETROLEUM OPERATING LLC

Well Name: OSAGE BOYD 15 FEDERAL COM

Well Number: 19H

Section 10 - Plans for Surface Reclamation

Type of disturbance: New Surface Disturbance

Multiple Well Pad Name: OSAGE BOYD 15 FEDERAL COM

Multiple Well Pad Number: 18H

Recontouring attachment:

Osage_19H_Interim_Reclamation_Diagram_20181022122259.pdf

Osage_19H_Recontour_Plat_20181022122308.pdf

Drainage/Erosion control construction: Crowned and ditched

Drainage/Erosion control reclamation: Harrowed on the contour

Well pad proposed disturbance (acres): 2.04	Well pad interim reclamation (acres): 0.37	Well pad long term disturbance (acres): 1.67
Road proposed disturbance (acres): 0	Road interim reclamation (acres): 0	Road long term disturbance (acres): 0
Powerline proposed disturbance (acres): 0.38	Powerline interim reclamation (acres): 0	Powerline long term disturbance (acres): 0
Pipeline proposed disturbance (acres): 7.27	Pipeline interim reclamation (acres): 7.27	Pipeline long term disturbance (acres): 0
Other proposed disturbance (acres): 0.55	Other interim reclamation (acres): 0	Other long term disturbance (acres): 0.55
Total proposed disturbance: 10.24	Total interim reclamation: 7.64	Total long term disturbance: 2.22

Disturbance Comments:

Reconstruction method: Interim reclamation will be completed within 6 months of completing the well. Interim reclamation will consist of shrinking the well pad 0.37 acre by removing caliche and reclaiming 50' on the east side of the pad. This will leave 1.67 acres for the anchors, pump jacks, and tractor-trailer turn around. Disturbed areas will be contoured to match pre-construction grades. Soil and brush will be evenly spread over disturbed areas and harrowed on the contour. Disturbed areas will be seeded in accordance with surface owner's requirements.

Topsoil redistribution: Soil and brush will be evenly spread over disturbed areas and harrowed on the contour. Disturbed areas will be seeded in accordance with surface owner's requirements.

Soil treatment: None

Existing Vegetation at the well pad:

Existing Vegetation at the well pad attachment:

Existing Vegetation Community at the road:

Existing Vegetation Community at the road attachment:

Existing Vegetation Community at the pipeline:

Existing Vegetation Community at the pipeline attachment:

Existing Vegetation Community at other disturbances:

Existing Vegetation Community at other disturbances attachment:

Operator Name: PERCUSSION PETROLEUM OPERATING LLC

Well Name: OSAGE BOYD 15 FEDERAL COM

Well Number: 19H

Non native seed used? NO

Non native seed description:

Seedling transplant description:

Will seedlings be transplanted for this project? NO

Seedling transplant description attachment:

Will seed be harvested for use in site reclamation?

Seed harvest description:

Seed harvest description attachment:

Seed Management

Seed Table

Seed type:

Seed source:

Seed name:

Source name:

Source address:

Source phone:

Seed cultivar:

Seed use location:

PLS pounds per acre:

Proposed seeding season:

Seed Summary

Total pounds/Acre:

Seed Type	Pounds/Acre
------------------	--------------------

Seed reclamation attachment:

Operator Contact/Responsible Official Contact Info

First Name:

Last Name:

Phone:

Email:

Seedbed prep:

Seed BMP:

Seed method:

Existing invasive species? NO

Existing invasive species treatment description:

Operator Name: PERCUSSION PETROLEUM OPERATING LLC

Well Name: OSAGE BOYD 15 FEDERAL COM

Well Number: 19H

Existing invasive species treatment attachment:

Weed treatment plan description: To BLM standards

Weed treatment plan attachment:

Monitoring plan description: To BLM standards

Monitoring plan attachment:

Success standards: To BLM satisfaction

Pit closure description: No pit

Pit closure attachment:

Section 11 - Surface Ownership

Disturbance type: WELL PAD

Describe:

Surface Owner: PRIVATE OWNERSHIP

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office:

Military Local Office:

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Operator Name: PERCUSSION PETROLEUM OPERATING LLC

Well Name: OSAGE BOYD 15 FEDERAL COM

Well Number: 19H

Fee Owner: Ross Ranch

Fee Owner Address: PO Box 216 Lakewood NM 88254

Phone: (575)365-4797

Email:

Surface use plan certification: NO

Surface use plan certification document:

Surface access agreement or bond: Agreement

Surface Access Agreement Need description: See attached

Surface Access Bond BLM or Forest Service:

BLM Surface Access Bond number:

USFS Surface access bond number:

Disturbance type: OTHER

Describe: Central Tank Battery

Surface Owner: PRIVATE OWNERSHIP

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office:

Military Local Office:

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Operator Name: PERCUSSION PETROLEUM OPERATING LLC

Well Name: OSAGE BOYD 15 FEDERAL COM

Well Number: 19H

Fee Owner: Ross Ranch

Fee Owner Address: PO Box 216 Lakewood NM 88254

Phone: (575)365-4797

Email:

Surface use plan certification: NO

Surface use plan certification document:

Surface access agreement or bond: Agreement

Surface Access Agreement Need description: See attached

Surface Access Bond BLM or Forest Service:

BLM Surface Access Bond number:

USFS Surface access bond number:

Disturbance type: OTHER

Describe: Flow Line

Surface Owner: PRIVATE OWNERSHIP

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office:

Military Local Office:

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Operator Name: PERCUSSION PETROLEUM OPERATING LLC

Well Name: OSAGE BOYD 15 FEDERAL COM

Well Number: 19H

Fee Owner: Ross Ranch

Fee Owner Address: PO Box 216 Lakewood NM 88254

Phone: (575)365-4797

Email:

Surface use plan certification: NO

Surface use plan certification document:

Surface access agreement or bond: Agreement

Surface Access Agreement Need description: See attached

Surface Access Bond BLM or Forest Service:

BLM Surface Access Bond number:

USFS Surface access bond number:

Disturbance type: OTHER

Describe: Oil Line

Surface Owner: PRIVATE OWNERSHIP

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office:

Military Local Office:

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Operator Name: PERCUSSION PETROLEUM OPERATING LLC

Well Name: OSAGE BOYD 15 FEDERAL COM

Well Number: 19H

Fee Owner: Ross & Barbara Whitney Trust

Fee Owner Address: 25601 E 130th Street Greenwood MO
64034

Phone: (816)525-1233

Email:

Surface use plan certification: NO

Surface use plan certification document:

Surface access agreement or bond: Agreement

Surface Access Agreement Need description: See attached

Surface Access Bond BLM or Forest Service:

BLM Surface Access Bond number:

USFS Surface access bond number:

Disturbance type: OTHER

Describe: Power Line

Surface Owner: PRIVATE OWNERSHIP

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office:

Military Local Office:

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Operator Name: PERCUSSION PETROLEUM OPERATING LLC

Well Name: OSAGE BOYD 15 FEDERAL COM

Well Number: 19H

Fee Owner: Ross Ranch

Fee Owner Address: PO Box 216 Lakewood NM 88254

Phone: (575)365-4797

Email:

Surface use plan certification: NO

Surface use plan certification document:

Surface access agreement or bond: Agreement

Surface Access Agreement Need description: See attached

Surface Access Bond BLM or Forest Service:

BLM Surface Access Bond number:

USFS Surface access bond number:

Disturbance type: OTHER

Describe: Water Line

Surface Owner: PRIVATE OWNERSHIP

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office:

Military Local Office:

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Operator Name: PERCUSSION PETROLEUM OPERATING LLC

Well Name: OSAGE BOYD 15 FEDERAL COM

Well Number: 19H

Fee Owner: Ross Ranch

Fee Owner Address: PO Box 216 Lakewood NM 88254

Phone: (575)365-4797

Email:

Surface use plan certification: NO

Surface use plan certification document:

Surface access agreement or bond: Agreement

Surface Access Agreement Need description: See attached

Surface Access Bond BLM or Forest Service:

BLM Surface Access Bond number:

USFS Surface access bond number:

Section 12 - Other Information

Right of Way needed? NO

Use APD as ROW?

ROW Type(s):

ROW Applications

SUPO Additional Information:

Use a previously conducted onsite? YES


Previous Onsite information: On-site inspection was held with Matt Wirth (BLM) on July 12, 2018. Lone Mountain inspected the well pad and submitted archaeology report NMCRIS-141118 on August 7, 2018.

Other SUPO Attachment

Osage_19H_SUPO_20181022122514.pdf

Osage_19H_Surface_Use_Agreement_20181022122812.pdf



104.51667° W 104.50000° W 104.48333° W 104.46667° W 104.45000° W 104.43333° W 104.41667° W 104.40000° W 104.38333° W WGS84 104.35000° W

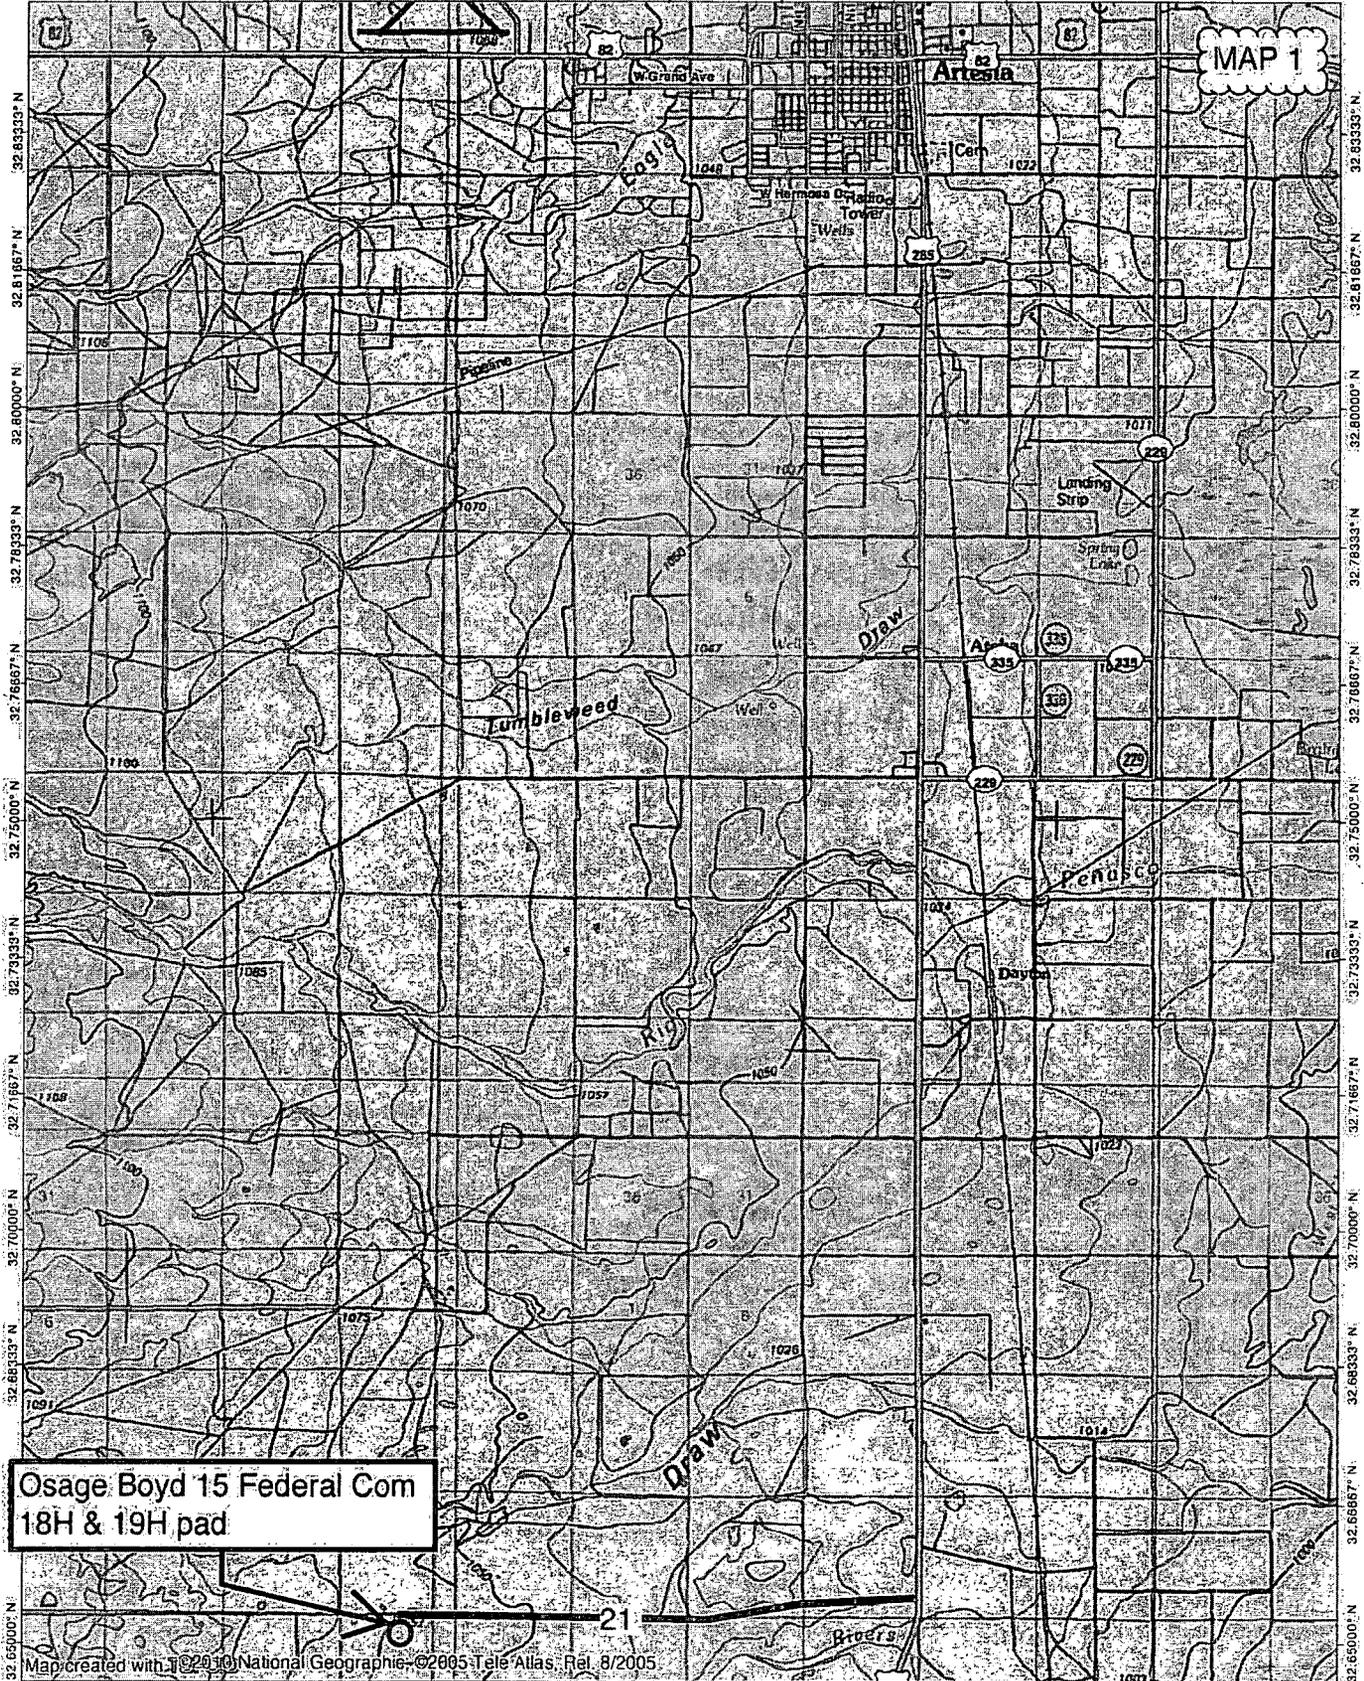


Osage Boyd 15 Federal Com 18H & 19H pad

Map created with ©2010 National Geographic ©2005 Tele Atlas, Rel. 8/2005

104.51667° W 104.50000° W 104.48333° W 104.46667° W 104.45000° W 104.43333° W 104.41667° W 104.40000° W 104.38333° W WGS84 104.35000° W





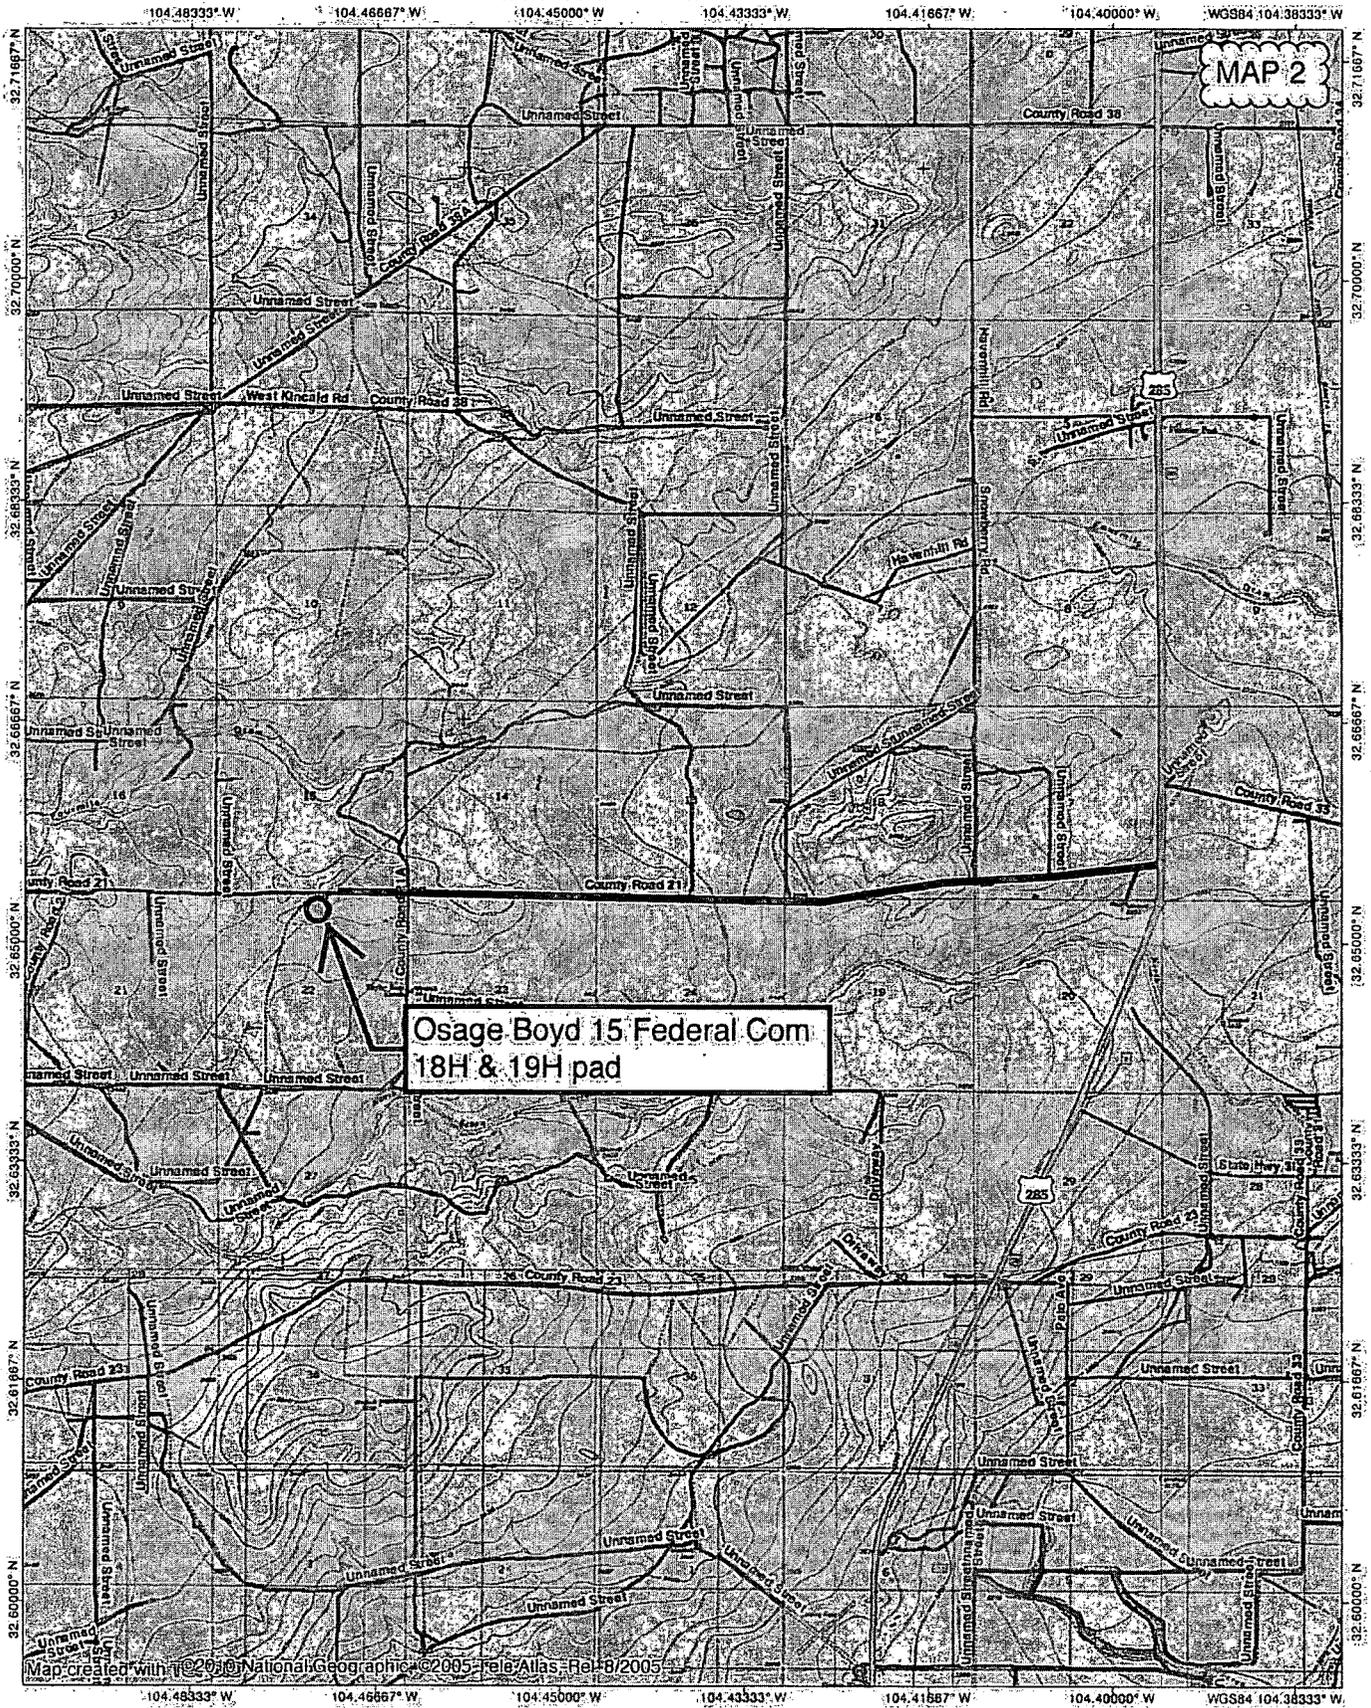



Osage Boyd 15 Federal Com
18H & 19H pad

MAP 2

Map created with ©2005 National Geographic ©2005 TeleAtlas Rel 8/2005



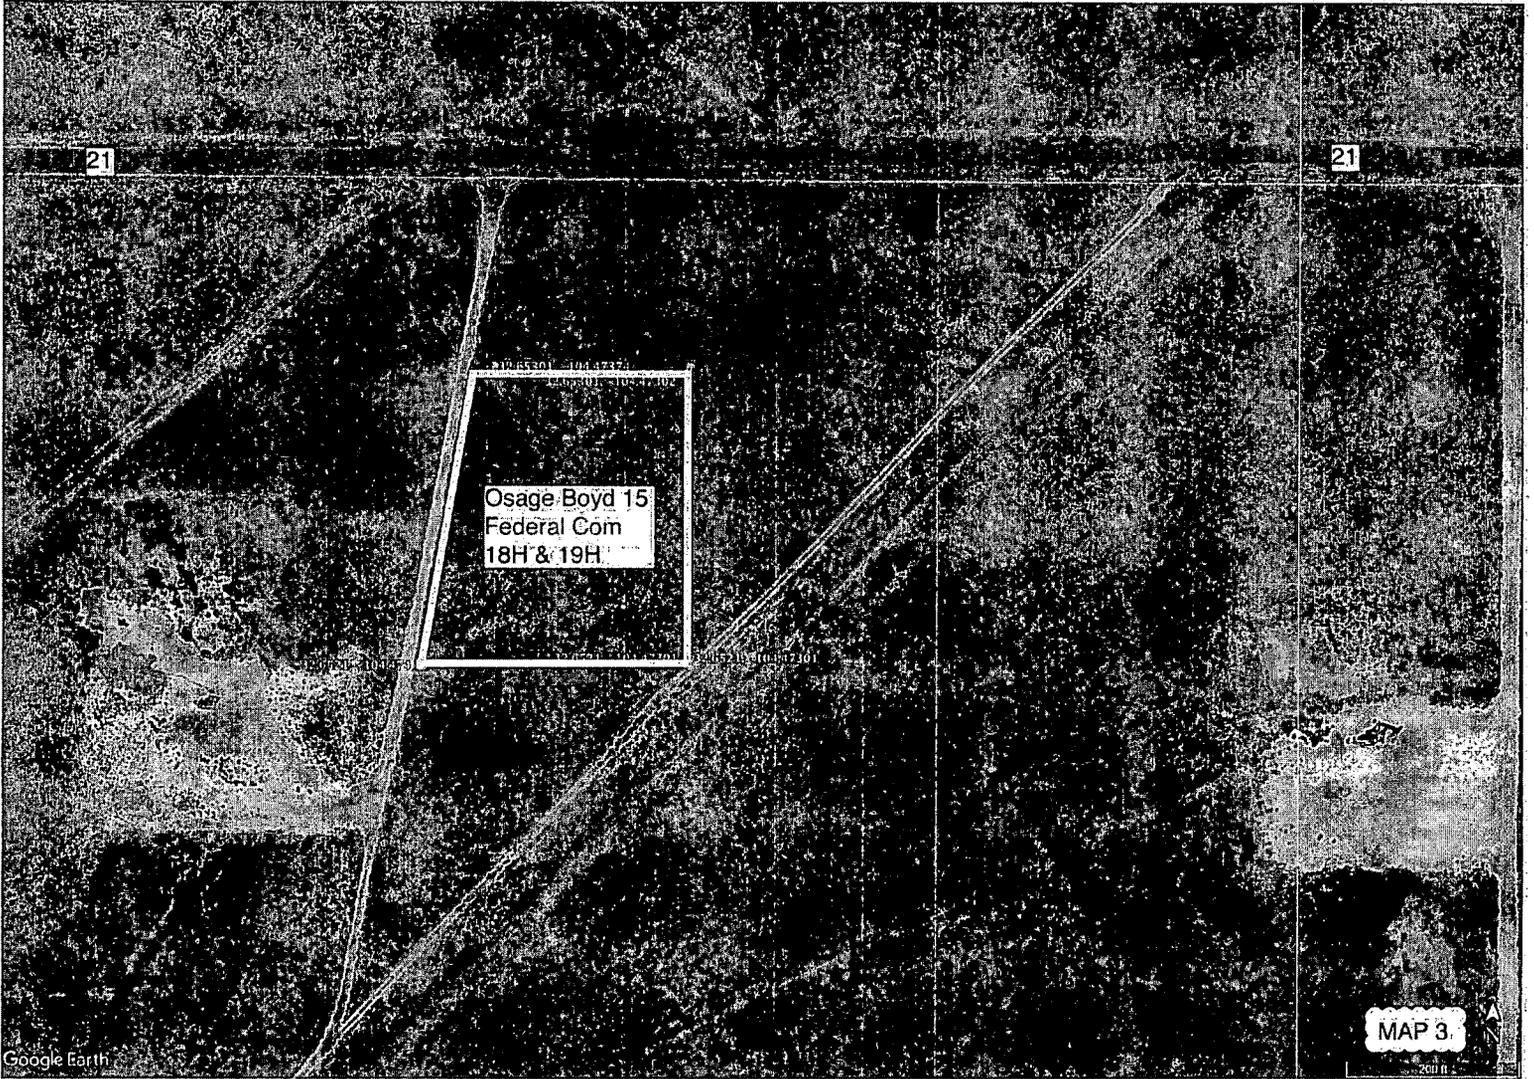

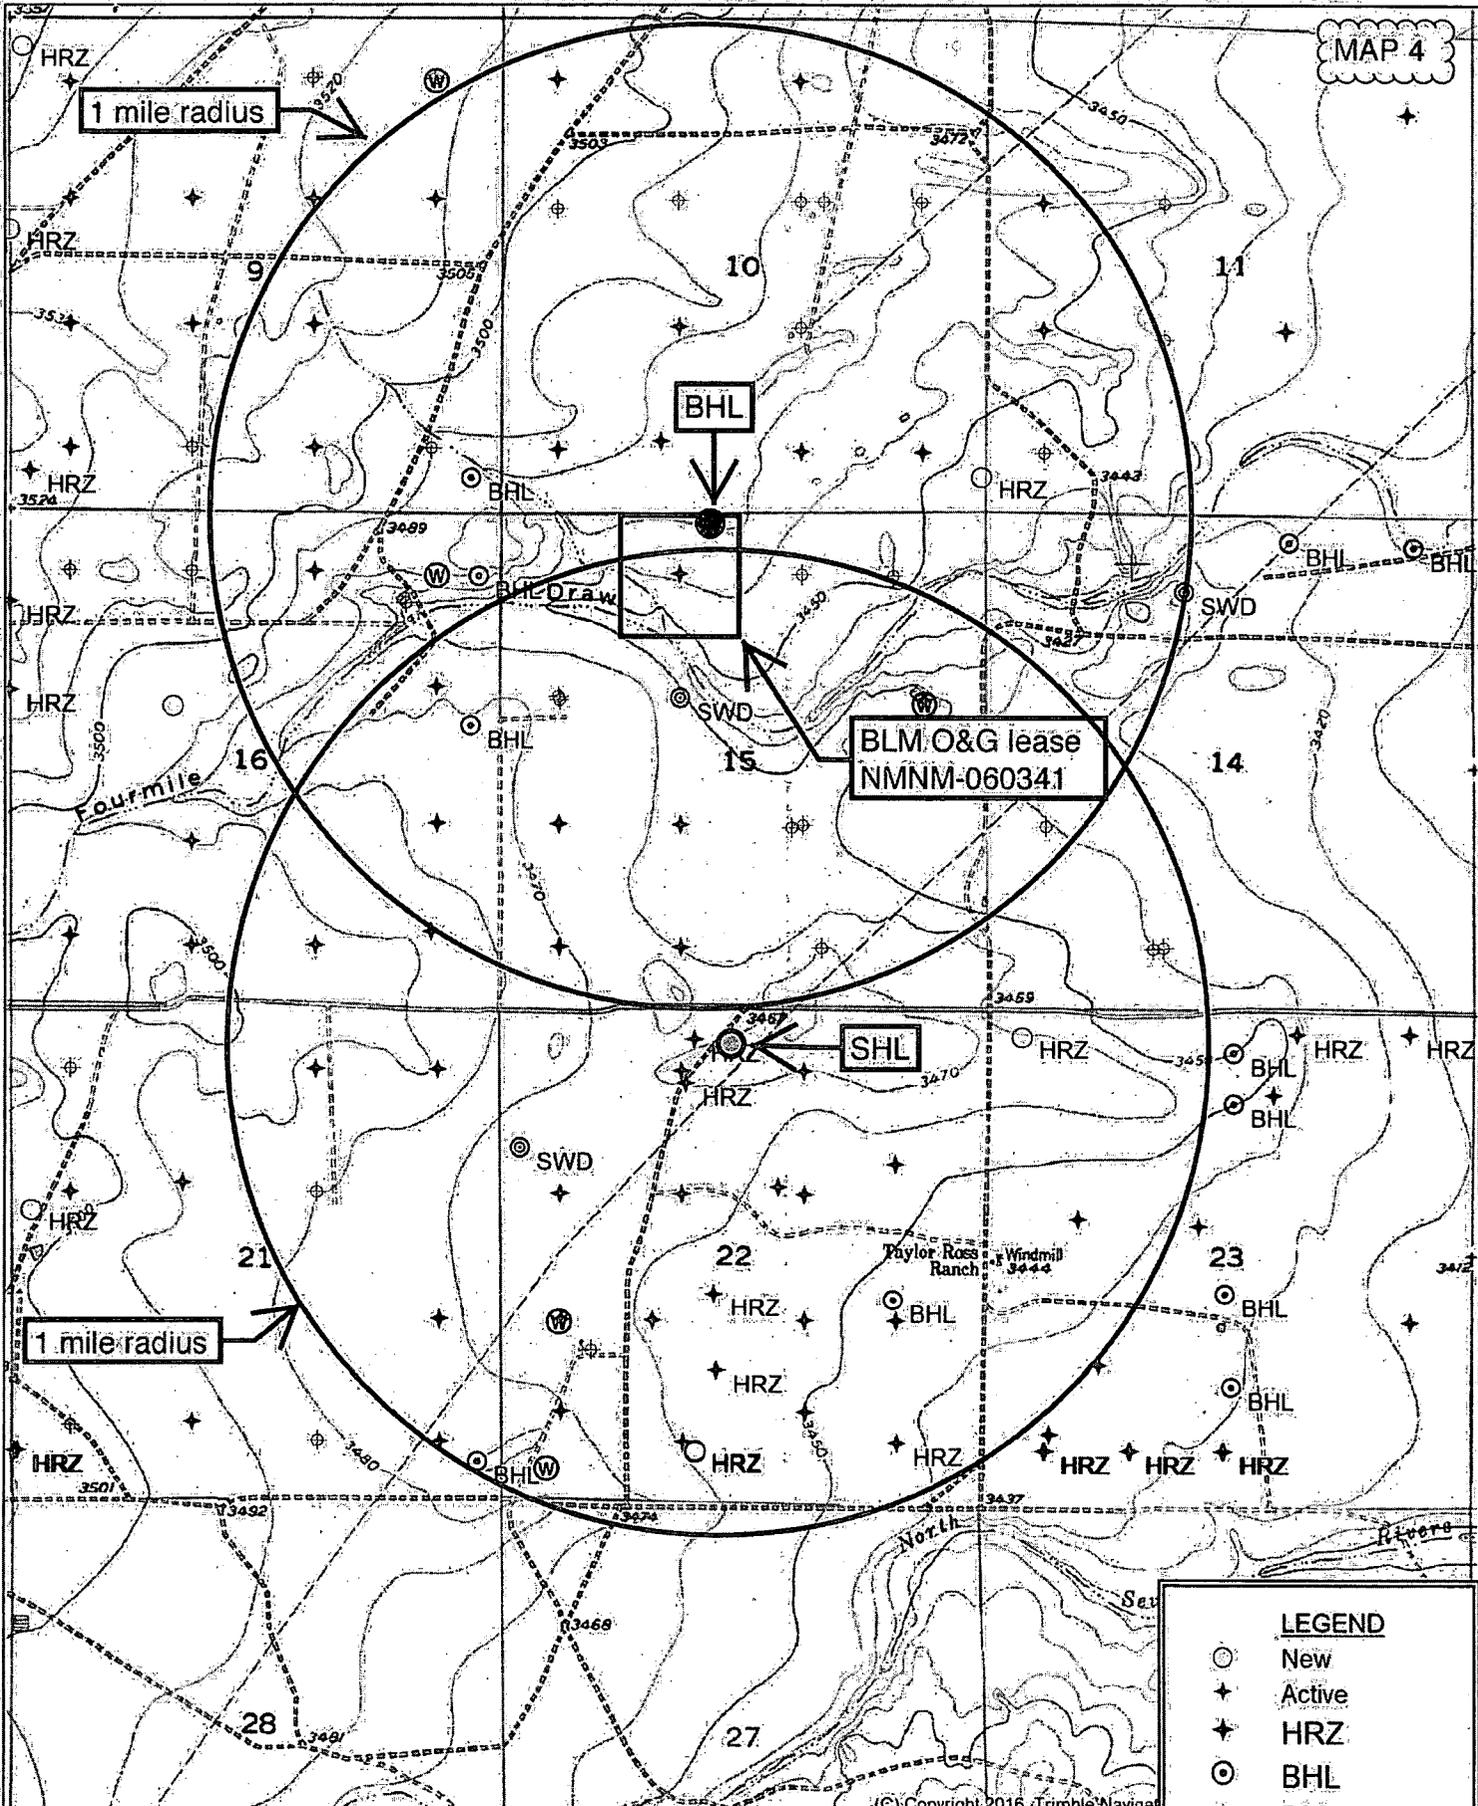

BLM O&G lease
NMNM-060341

1 mile radius

1 mile radius

LEGEND	
○	New
+	Active
✦	HRZ
⊙	BHL
⊕	P&A
⊗	INJ
⊖	SWD
⊙	Water



Quad: DAYTON
Scale: 1 inch = 2,000 ft.

Osage Boyd 15
Federal Com
18H 19H pad

Percussion's
Ross Ranch pad
(since expanded south
& east for 2 drilled
Goodman wells)

739.4' proposed
surface flowline


555.1' proposed
O/H power line

Central Tank Battery

MAP 5

Google Earth

200 ft

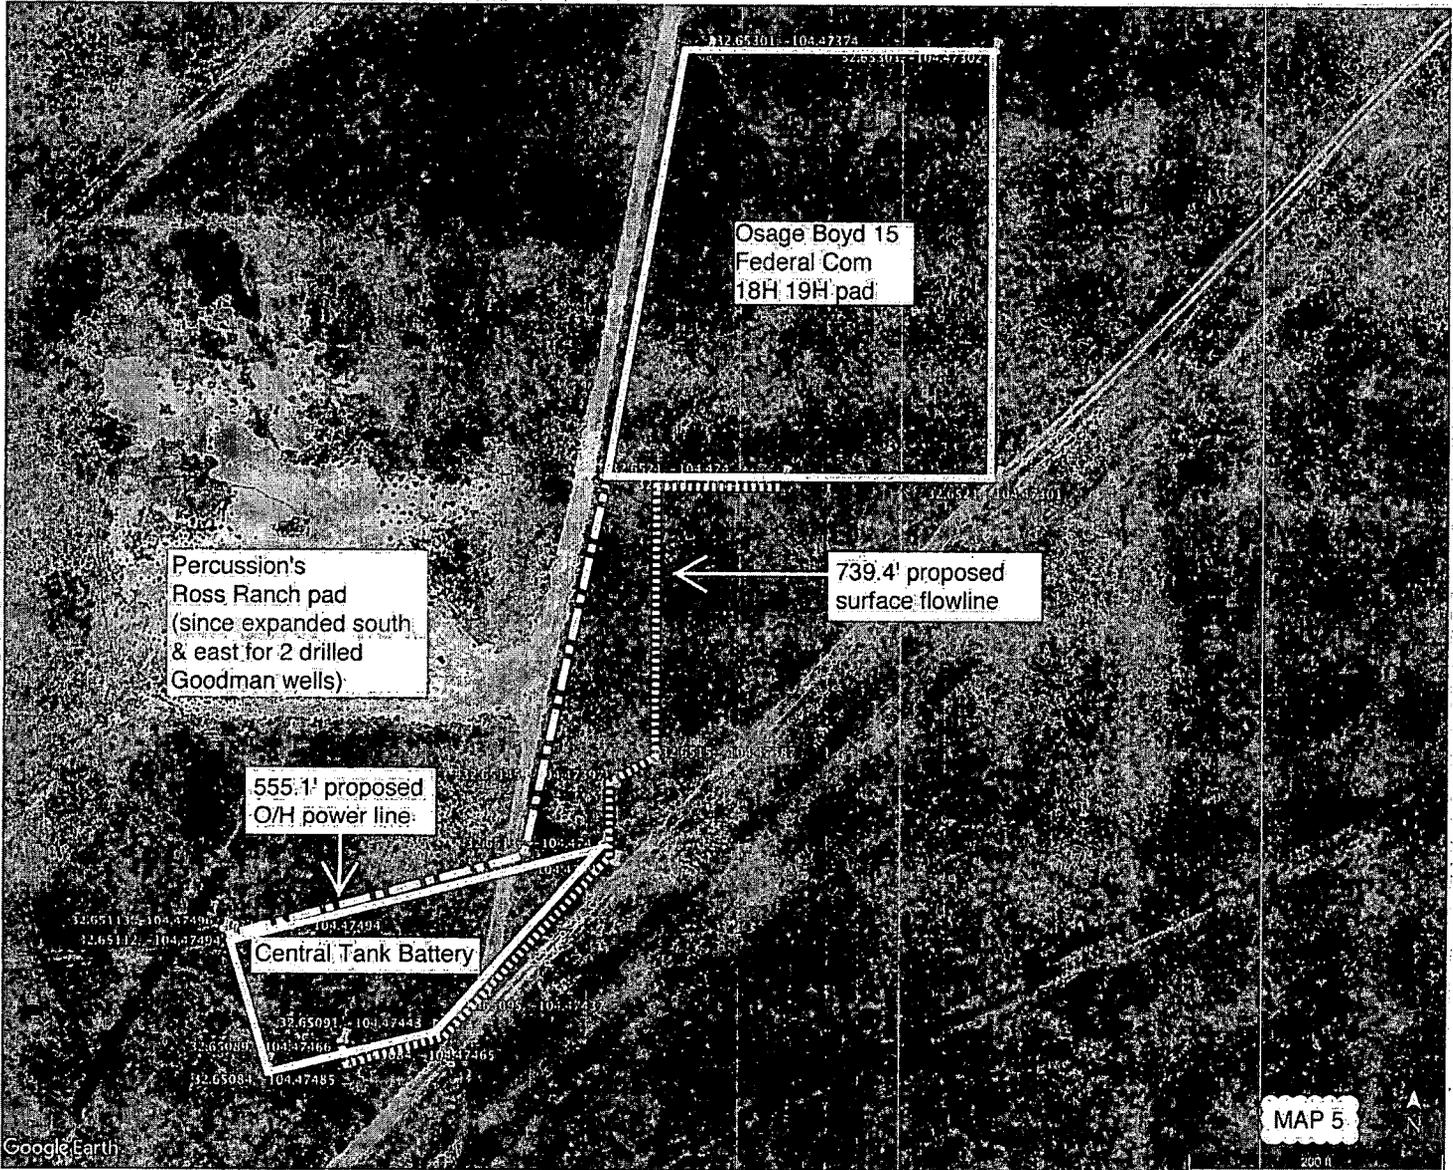


SECTION 22, TOWNSHIP 19 SOUTH, RANGE 25 EAST. N.M.P.M.,
EDDY COUNTY, NEW MEXICO.

MAP 6B

OWNER: JEROME HUGH JONES, ETAL

process equipment on north

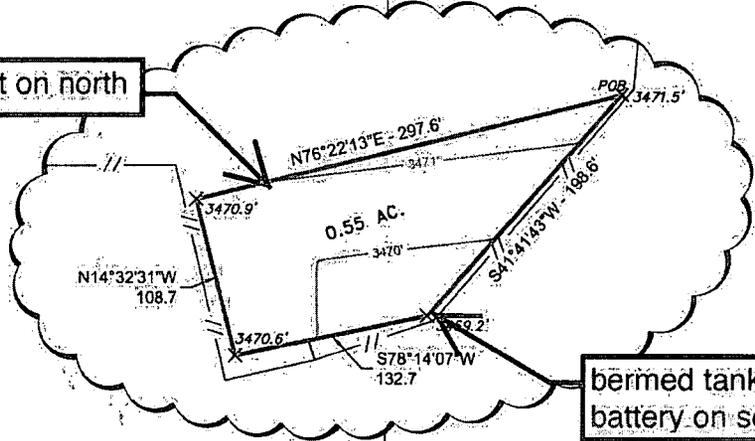

bermed tank battery on south


LEGAL DESCRIPTION

A TRACT OF LAND LOCATED IN SECTION 22, TOWNSHIP 19 SOUTH, RANGE 25 EAST, N.M.P.M., EDDY COUNTY, NEW MEXICO AND BEING MORE PARTICULARLY DESCRIBED AS FOLLOWS:


BEGINNING AT A POINT WHICH LIES S.89°53'53\"/>

I HEREBY CERTIFY THAT THIS PLAN WAS PREPARED FROM FIELD NOTES OF AN ACTUAL SURVEY AND MEETS OR EXCEEDS ALL REQUIREMENTS FOR LAND SURVEYS AS SPECIFIED BY THIS STATE.

GARY L. JONES, P.S.
No: 7977
No. 5074



P.O. Box 1786 (575) 393-7316 - Office
1120 N. West County Rd. (575) 392-2208 - Fax
Hobbs, New Mexico 88241 basin-surveys.com




PERCUSSION PETROLEUM OPERATING, LLC

REF: PROPOSED OSAGE BOYD TANK BATTERY

A TRACT OF LAND LOCATED IN
SECTION 22, TOWNSHIP 19 SOUTH, RANGE 25 EAST,
N.M.P.M., EDDY COUNTY, NEW MEXICO.

SECTION 22, TOWNSHIP 19 SOUTH, RANGE 25 EAST, N.M.P.M.,
 EDDY COUNTY, NEW MEXICO.


MAP 6C

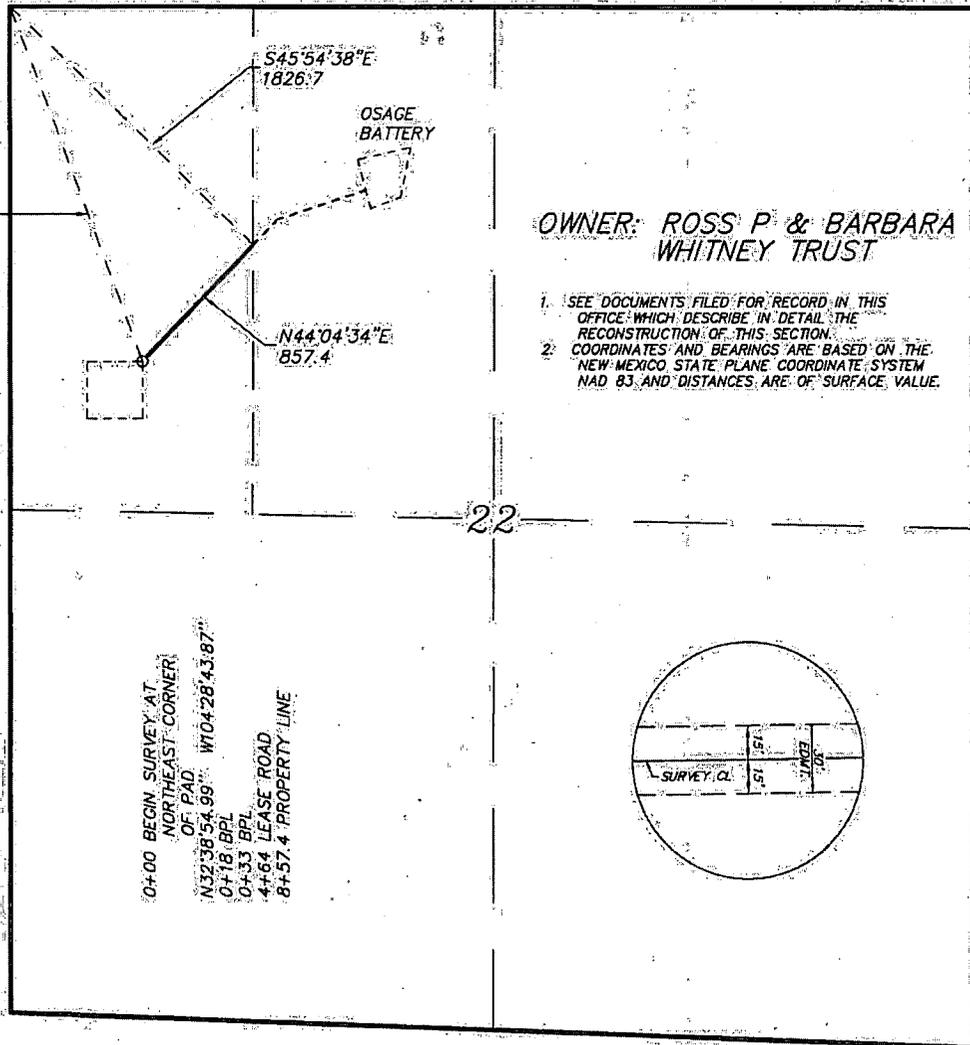

OWNER: ROSS P & BARBARA
 WHITNEY TRUST

1. SEE DOCUMENTS FILED FOR RECORD IN THIS OFFICE WHICH DESCRIBE IN DETAIL THE RECONSTRUCTION OF THIS SECTION.
2. COORDINATES AND BEARINGS ARE BASED ON THE NEW MEXICO STATE PLANE COORDINATE SYSTEM NAD 83 AND DISTANCES ARE OF SURFACE VALUE.

0+00 BEGIN SURVEY AT
 NORTHEAST CORNER
 OF PAD
 N32°38'54.99" W104°28'43.87"
 0+18 BPL
 0+33 BPL
 4+64 LEASE ROAD
 8+57.4 PROPERTY LINE



LEGAL DESCRIPTION


A STRIP OF LAND 30.0 FEET WIDE, LOCATED IN SECTION 22, TOWNSHIP 19 SOUTH, RANGE 25 EAST, N.M.P.M., EDDY COUNTY, NEW MEXICO AND BEING 15.0 FEET LEFT AND 15.0 FEET RIGHT OF THE FOLLOWING DESCRIBED CENTERLINE SURVEY.

BEGINNING AT A POINT WHICH LIES S20°46'36"E., 2017.9 FEET FROM THE NORTHWEST CORNER OF SAID SECTION 22; THENCE N44°04'34"E., 857.4 FEET TO A POINT ON THE EAST PROPERTY LINE WHICH LIES S45°54'38"E., 1826.7 FEET FROM THE NORTHWEST CORNER OF SAID SECTION 22. SAID STRIP OF LAND BEING 857.4 FEET OR 51.96 RODS IN LENGTH.

I HEREBY CERTIFY THAT THIS PLAN WAS PREPARED FROM FIELD NOTES IN AN ACTUAL SURVEY AND MEETS OR EXCEEDS ALL REQUIREMENTS FOR LAND SURVEYS AS SPECIFIED BY THIS STATE.

GARY L. JONES
 PROFESSIONAL LAND SURVEYOR

GARY L. JONES, P.S. No. 7977
 No. 5074



PERCUSSION PETROLEUM OPERATING, LLC

REF: PROPOSED CRUDE OIL LINE TO OSAGE BATTERY

A PIPELINE CROSSING FEE LAND IN
 SECTION 22, TOWNSHIP 19 SOUTH, RANGE 25 EAST,
 N.M.P.M., EDDY COUNTY, NEW MEXICO.


basin surveys
 focused on excellence
 in the oilfield

P.O. Box 1786
 1120 N. West County Rd.
 Hobbs, New Mexico 88241

(575) 393-7316 - Office
 (575) 392-2206 - Fax
 basin-surveys.com


**SECTION 22, TOWNSHIP 19 SOUTH, RANGE 25 EAST. N.M.P.M.,
EDDY COUNTY, NEW MEXICO.**

MAP 6D

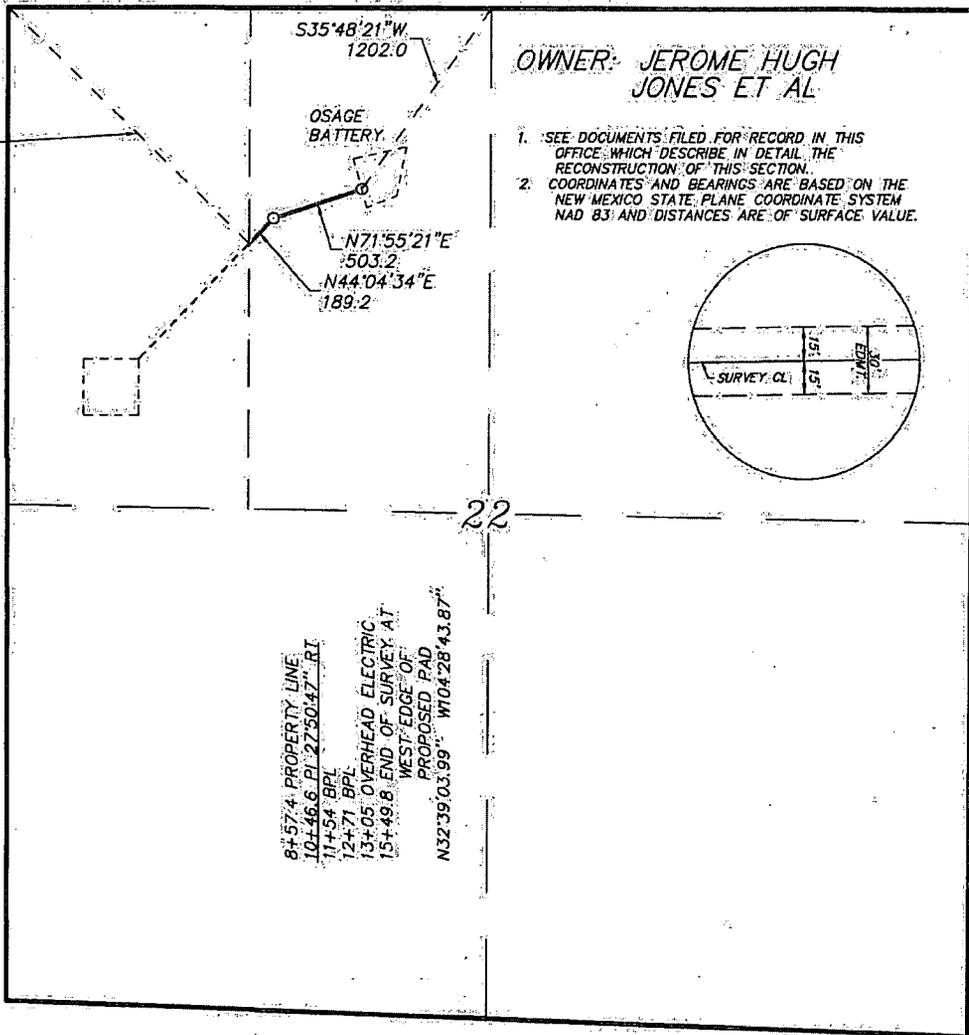

OWNER: JEROME HUGH JONES ET AL

1. SEE DOCUMENTS FILED FOR RECORD IN THIS OFFICE WHICH DESCRIBE IN DETAIL THE RECONSTRUCTION OF THIS SECTION.
2. COORDINATES AND BEARINGS ARE BASED ON THE NEW MEXICO STATE PLANE COORDINATE SYSTEM NAD 83 AND DISTANCES ARE OF SURFACE VALUE.



8+57.4 PROPERTY LINE
10+46.6 PL 27°50'47" RT
11+54 BPL
12+71 BPL
13+05 OVERHEAD ELECTRIC
15+49.8 END OF SURVEY AT
WEST EDGE OF
PROPOSED PAD
N32°39'03.99" W104°28'43.87"

LEGAL DESCRIPTION


A STRIP OF LAND 30.0 FEET WIDE, LOCATED IN SECTION 22, TOWNSHIP 19 SOUTH, RANGE 25 EAST, N.M.P.M., EDDY COUNTY, NEW MEXICO AND BEING 15.0 FEET LEFT AND 15.0 FEET RIGHT OF THE FOLLOWING DESCRIBED CENTERLINE SURVEY:

BEGINNING AT A POINT ON A POINT ON THE WEST PROPERTY LINE WHICH LIES S45°54'38"E, 1826.7 FEET FROM THE NORTHWEST CORNER OF SAID SECTION 22, THENCE N44°04'34"E, 189.2 FEET, THENCE N71°55'21"E, 503.2 FEET TO THE END OF THIS LINE WHICH LIES S35°48'21"W, 1202.0 FEET FROM THE NORTH QUARTER CORNER OF SAID SECTION 22. SAID STRIP OF LAND BEING .6924 FEET OR 41.96 RODS IN LENGTH.

I HEREBY CERTIFY THAT THIS PLAN WAS PREPARED FROM FIELD NOTES OF AN ACTUAL SURVEY AND MEETS OR EXCEEDS ALL REQUIREMENTS FOR LAND SURVEYS AS SPECIFIED BY THIS STATE.

GARY L. JONES, P.S.
PROFESSIONAL LAND SURVEYOR

GARY L. JONES, P.S. No. 7977
No. 5074




PERCUSSION PETROLEUM OPERATING, LLC


REF: PROPOSED CRUDE OIL LINE TO OSAGE BATTERY

A PIPELINE CROSSING FEE LAND IN
SECTION 22, TOWNSHIP 19 SOUTH, RANGE 25 EAST,
N.M.P.M., EDDY COUNTY, NEW MEXICO.




P.O. Box 1786 (575) 393-7316 - Office
1120 N. West County Rd. (575) 392-2206 - Fax
Hobbs, New Mexico 88241 basin-surveys.com

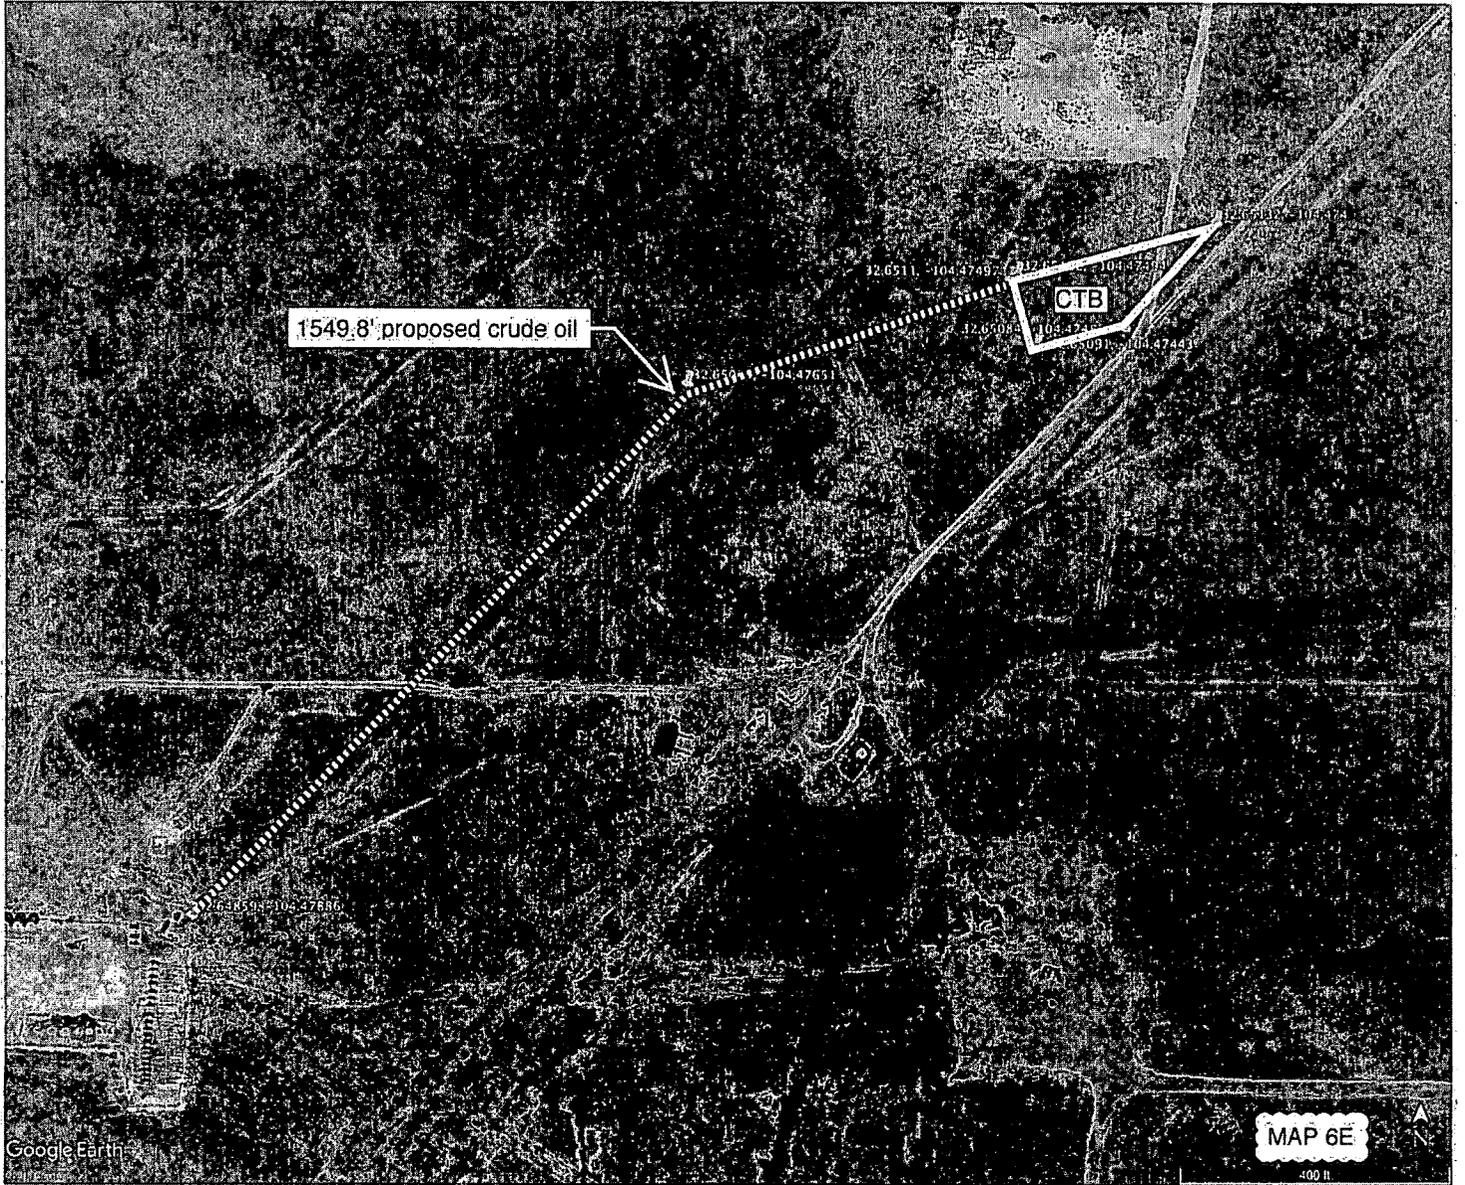

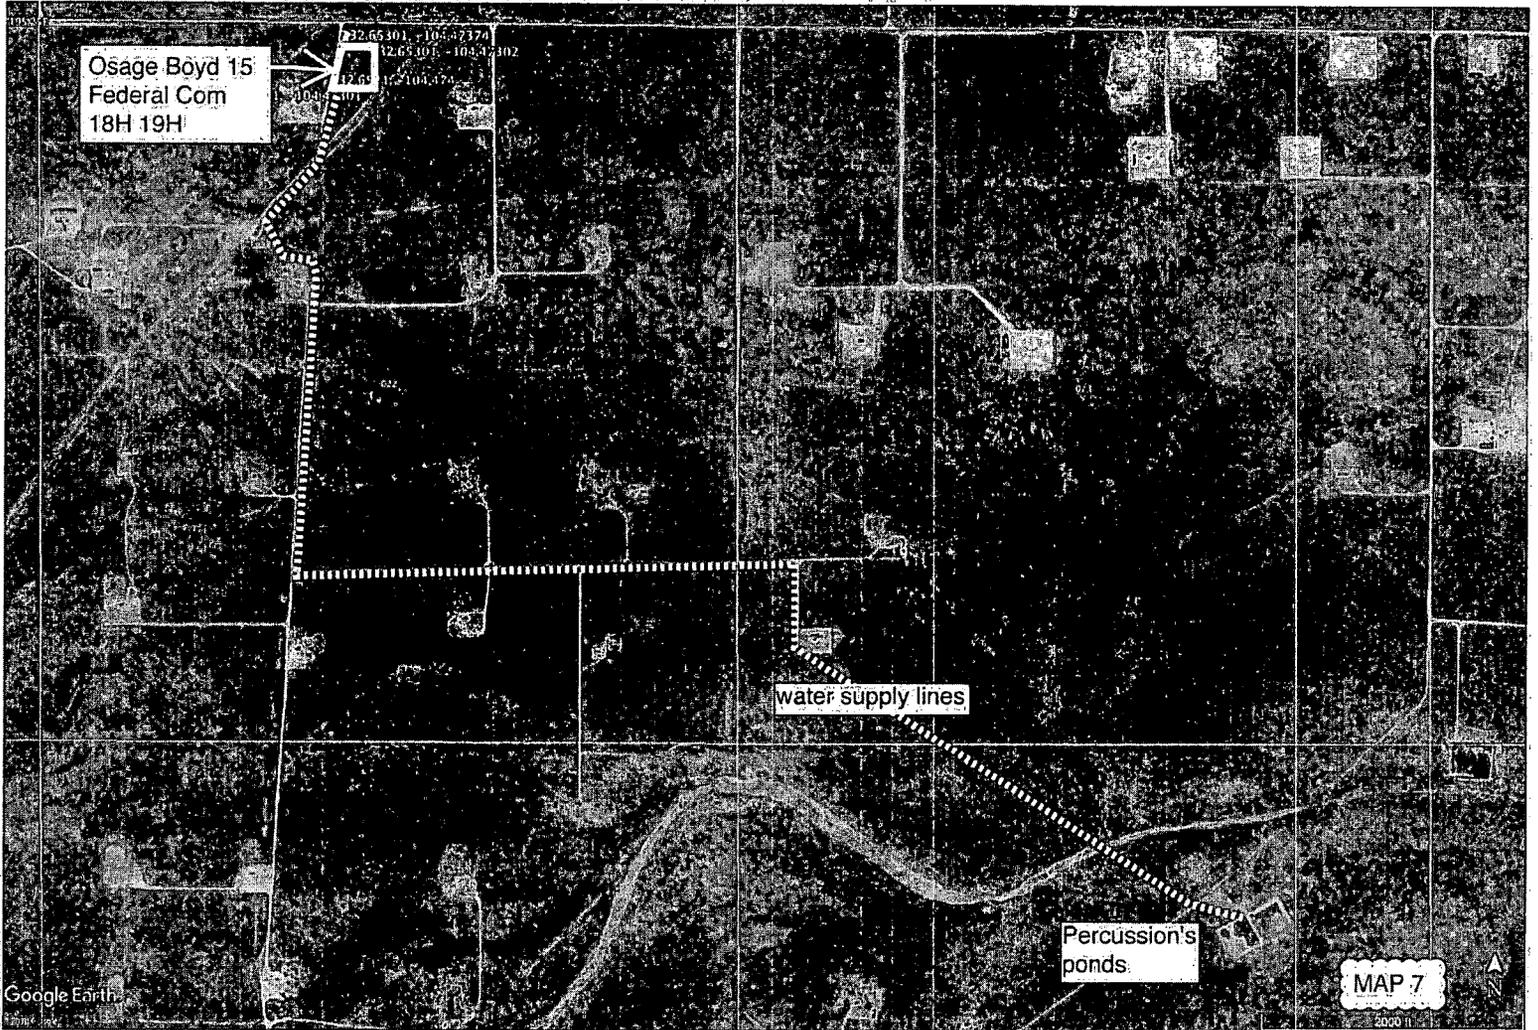

SECTION 22, TOWNSHIP 19 SOUTH, RANGE 25 EAST, N.M.P. MAP 8
 EDDY COUNTY, NEW MEXICO.

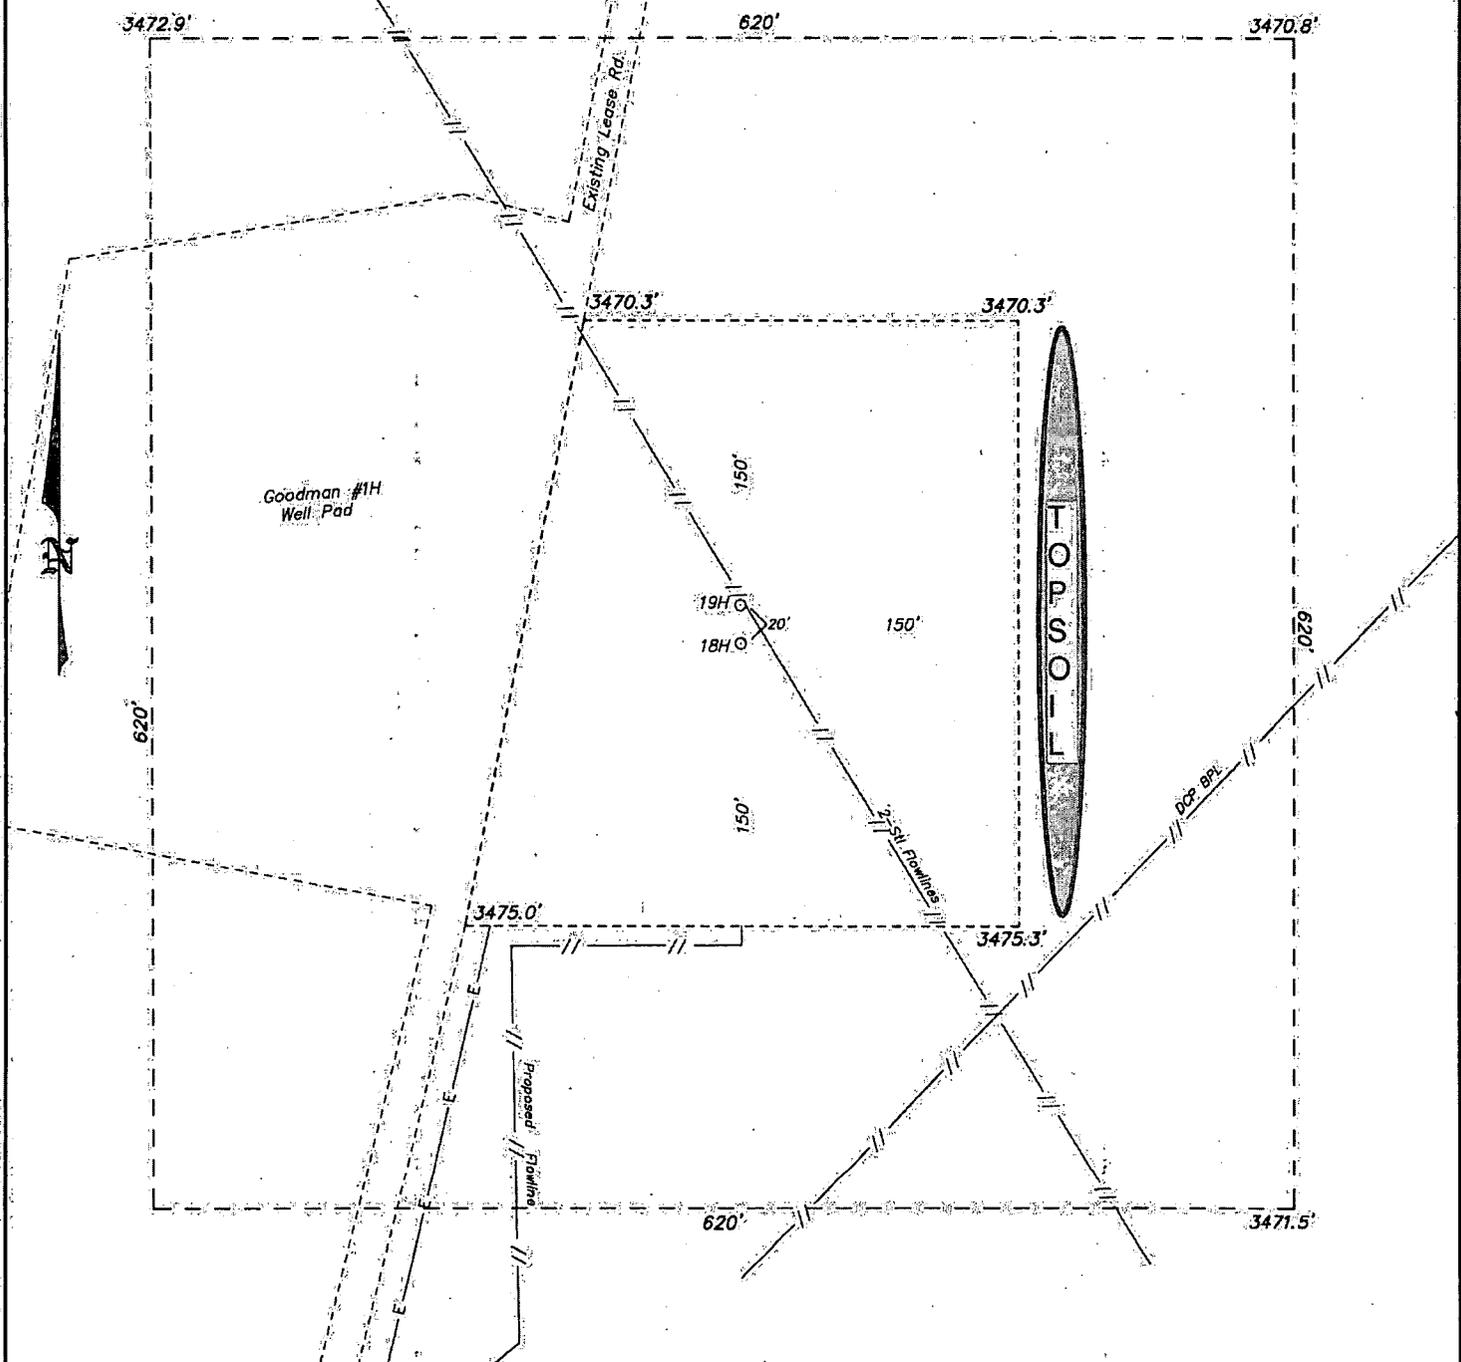


PERCUSSION PETROLEUM OPERATING, LLC

REF: OSAGE BOYD 15 FEDERAL COM 19H / WELL PAD TOPO
 THE OSAGE BOYD 15 FEDERAL COM 19H LOCATED 431' FROM
 THE NORTH LINE AND 2370' FROM THE WEST LINE OF
 SECTION 22, TOWNSHIP 19 SOUTH, RANGE 25 EAST,
 N.M.P.M., EDDY COUNTY, NEW MEXICO.

basin surveys
 focused on excellence
 in the oilfield

P.O. Box 1786 (575) 393-7316 - Office
 1120 N. West County Rd. (575) 392-2206 - Fax
 Hobbs, New Mexico 88241 basinsurveys.com

SECTION 22, TOWNSHIP 19 SOUTH, RANGE 25 EAST, N.M.P. [MAP 9]
 EDDY COUNTY, NEW MEXICO.

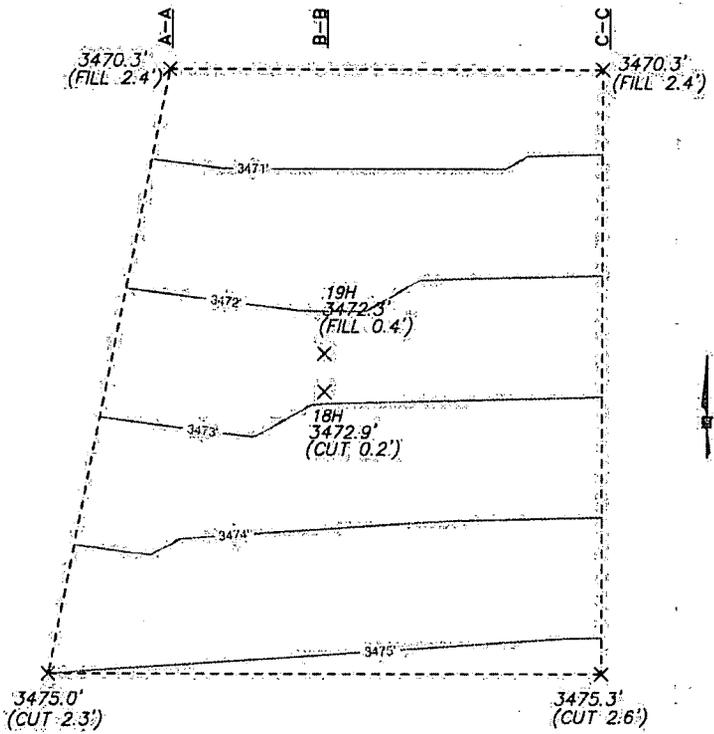

PERCUSSION PETROLEUM OPERATING, LLC





REF: OSAGE BOYD, 15 FEDERAL COM 18H&19H/WELL PAD TOPO

THE OSAGE BOYD 15 FEDERAL COM 18H&19H LOCATED IN
 SECTION 22, TOWNSHIP 19 SOUTH, RANGE 25 EAST,
 N.M.P.M., EDDY COUNTY, NEW MEXICO..



P.O. Box 1786 (575) 393-7316 - Office
 1120 N. West County Rd. (575) 392-2206 - Fax
 Hobbs, New Mexico 88241 basinsurveys.com

SECTION 22, TOWNSHIP 19 SOUTH, RANGE 25 EAST, N.M.P. MAP 10
 EDDY COUNTY, NEW MEXICO.

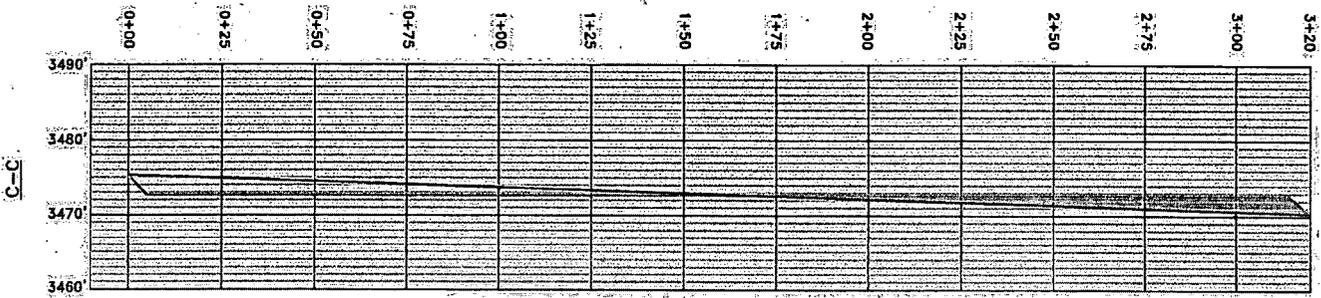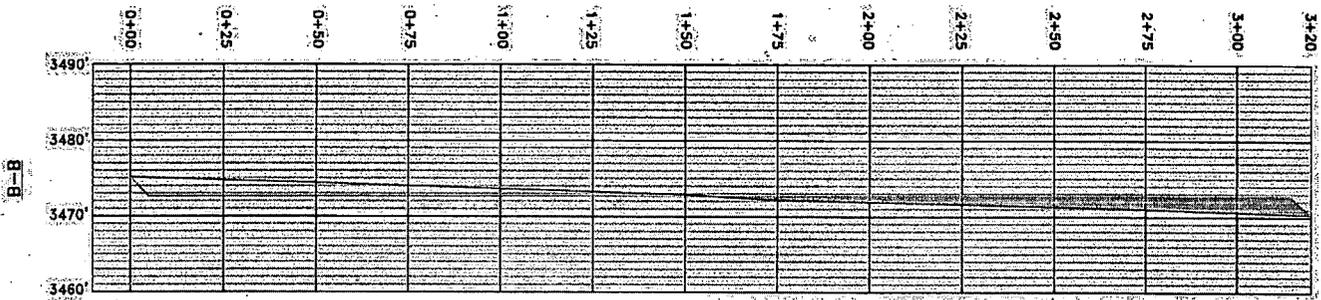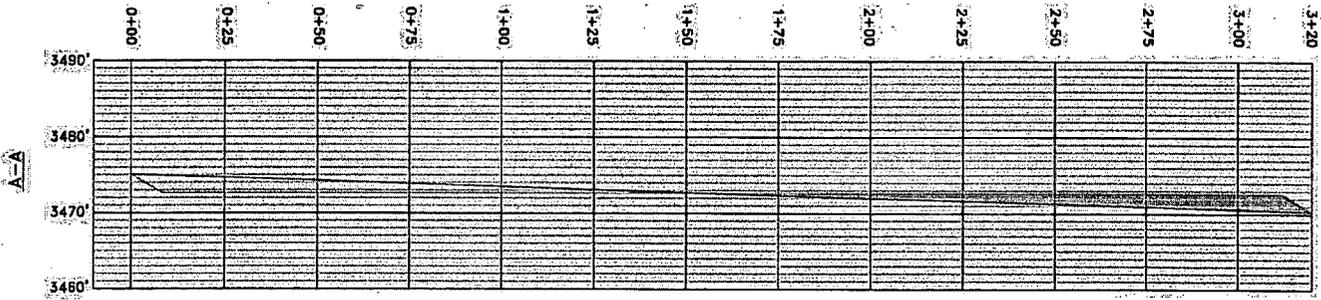


PERCUSSION PETROLEUM OPERATING, LLC

REF: OSAGE BOYD 15 FEDERAL COM 18H&19H/WELL PAD TOPO


THE OSAGE BOYD 15 FEDERAL COM 18H&19H LOCATED IN
 SECTION 22, TOWNSHIP 19 SOUTH, RANGE 25 EAST,
 N.M.P.M., EDDY COUNTY, NEW MEXICO.



P.O. Box 1786
 1120 N. West County Rd.
 Hobbs, New Mexico 88241
 (575) 393-7316 - Office
 (575) 392-2206 - Fax
 basin-surveys.com

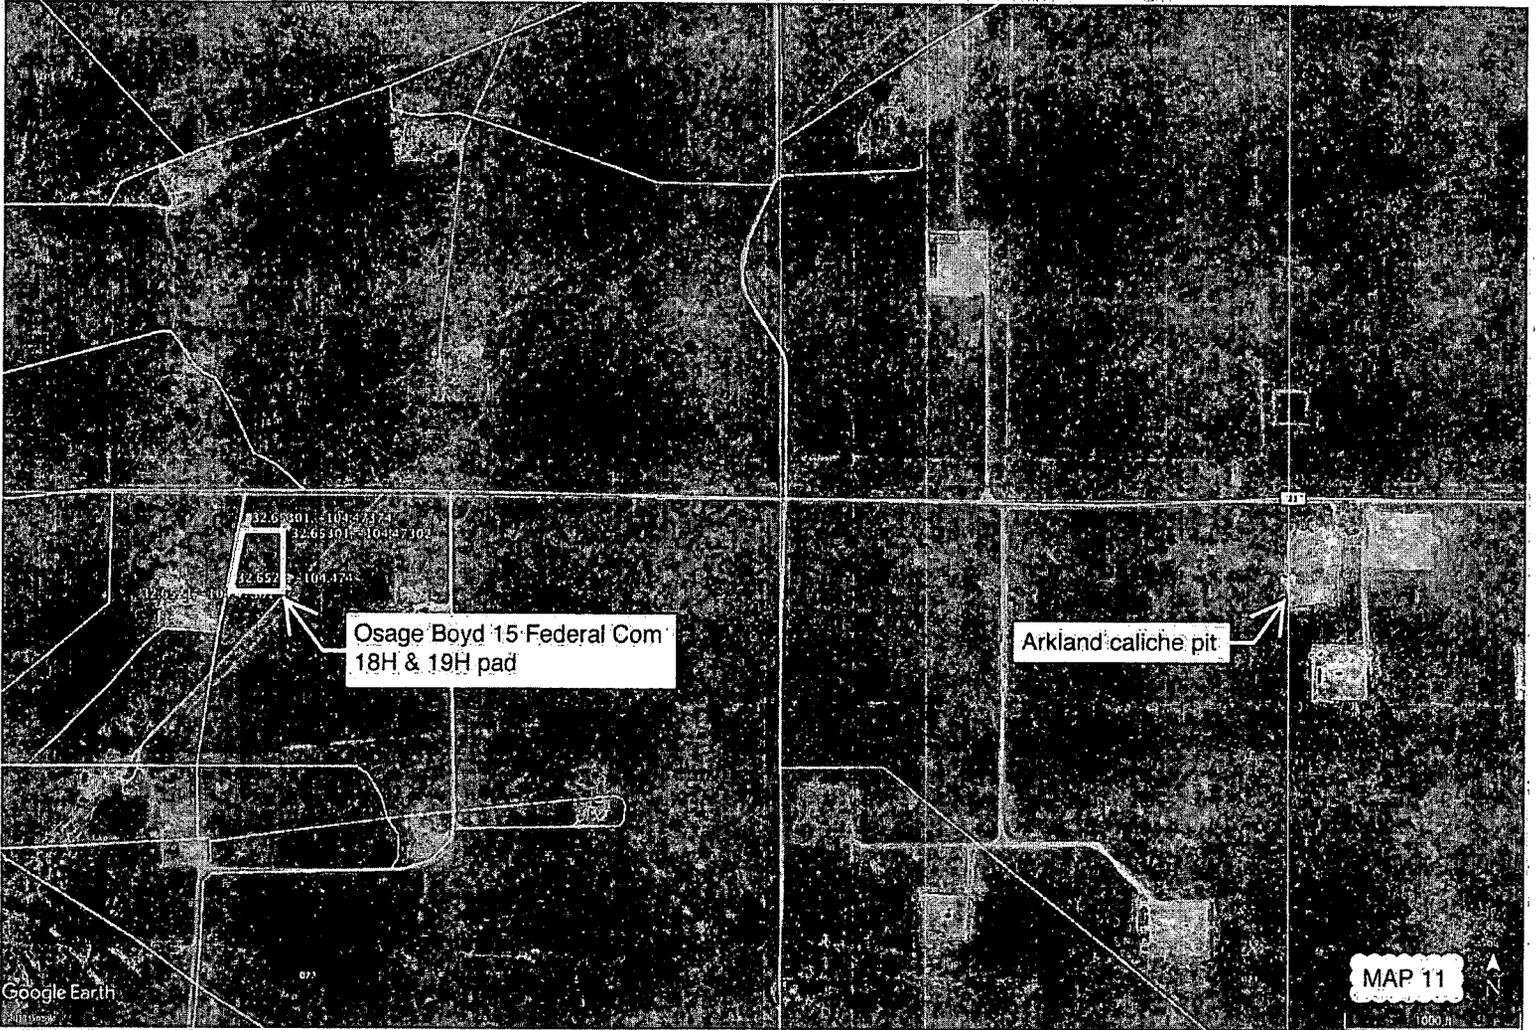

SECTION 22, TOWNSHIP 19 SOUTH, RANGE 25 EAST, N.M.P. MAP 12
 EDDY COUNTY, NEW MEXICO

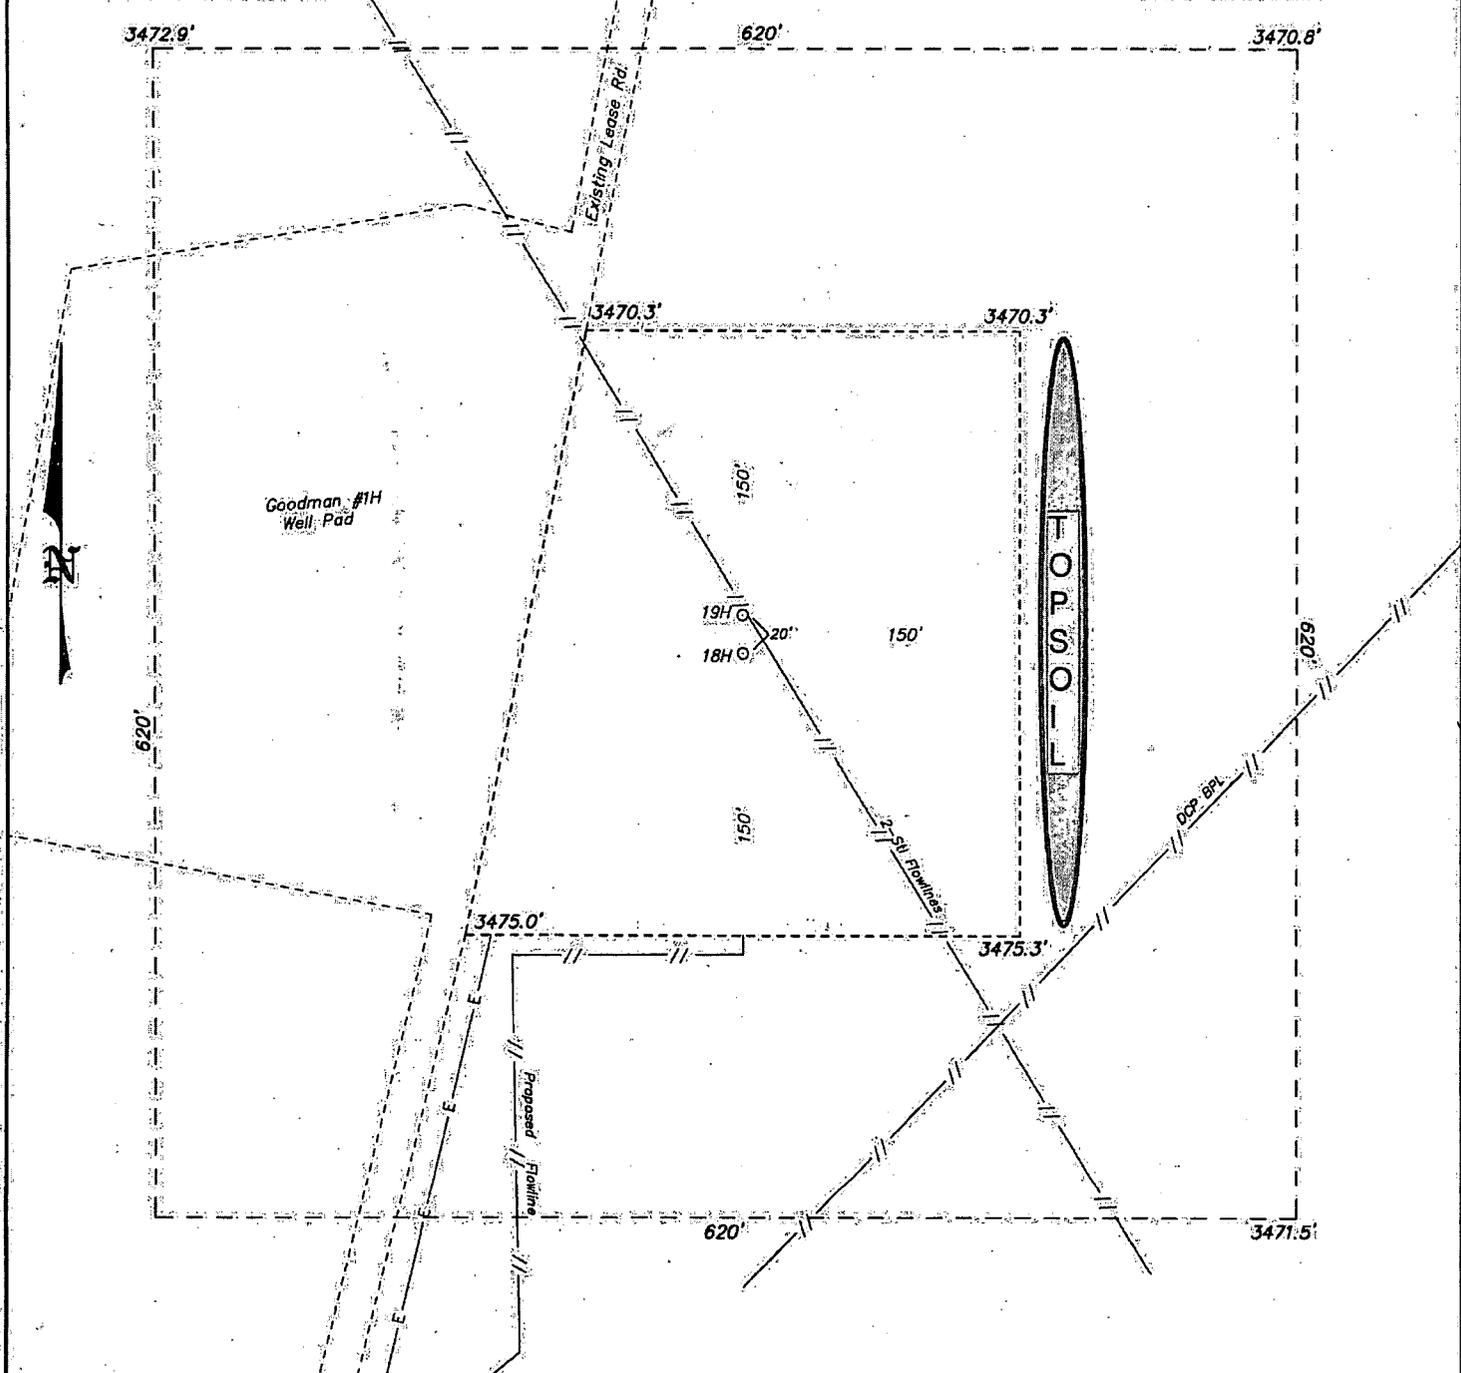

PERCUSSION PETROLEUM OPERATING, LLC

REF.: OSAGE, BOYD 15 FEDERAL COM 19H / WELL PAD TOPO
 THE OSAGE BOYD 15 FEDERAL COM 19H LOCATED 431' FROM
 THE NORTH LINE AND 2370' FROM THE WEST LINE OF
 SECTION 22, TOWNSHIP 19 SOUTH, RANGE 25 EAST,
 N.M.P.M., EDDY COUNTY, NEW MEXICO.




P.O. Box 1786
 1120 N. West County Rd.
 Hobbs, New Mexico 88241
 (575) 393-7316 - Office
 (575) 392-2206 - Fax
 basin-surveys.com

Percussion's
Osage Boyd 15 Federal Com 19H
rig diagram


NORTH

Prevailing Wind
out of South
or SSE

1" = 50'

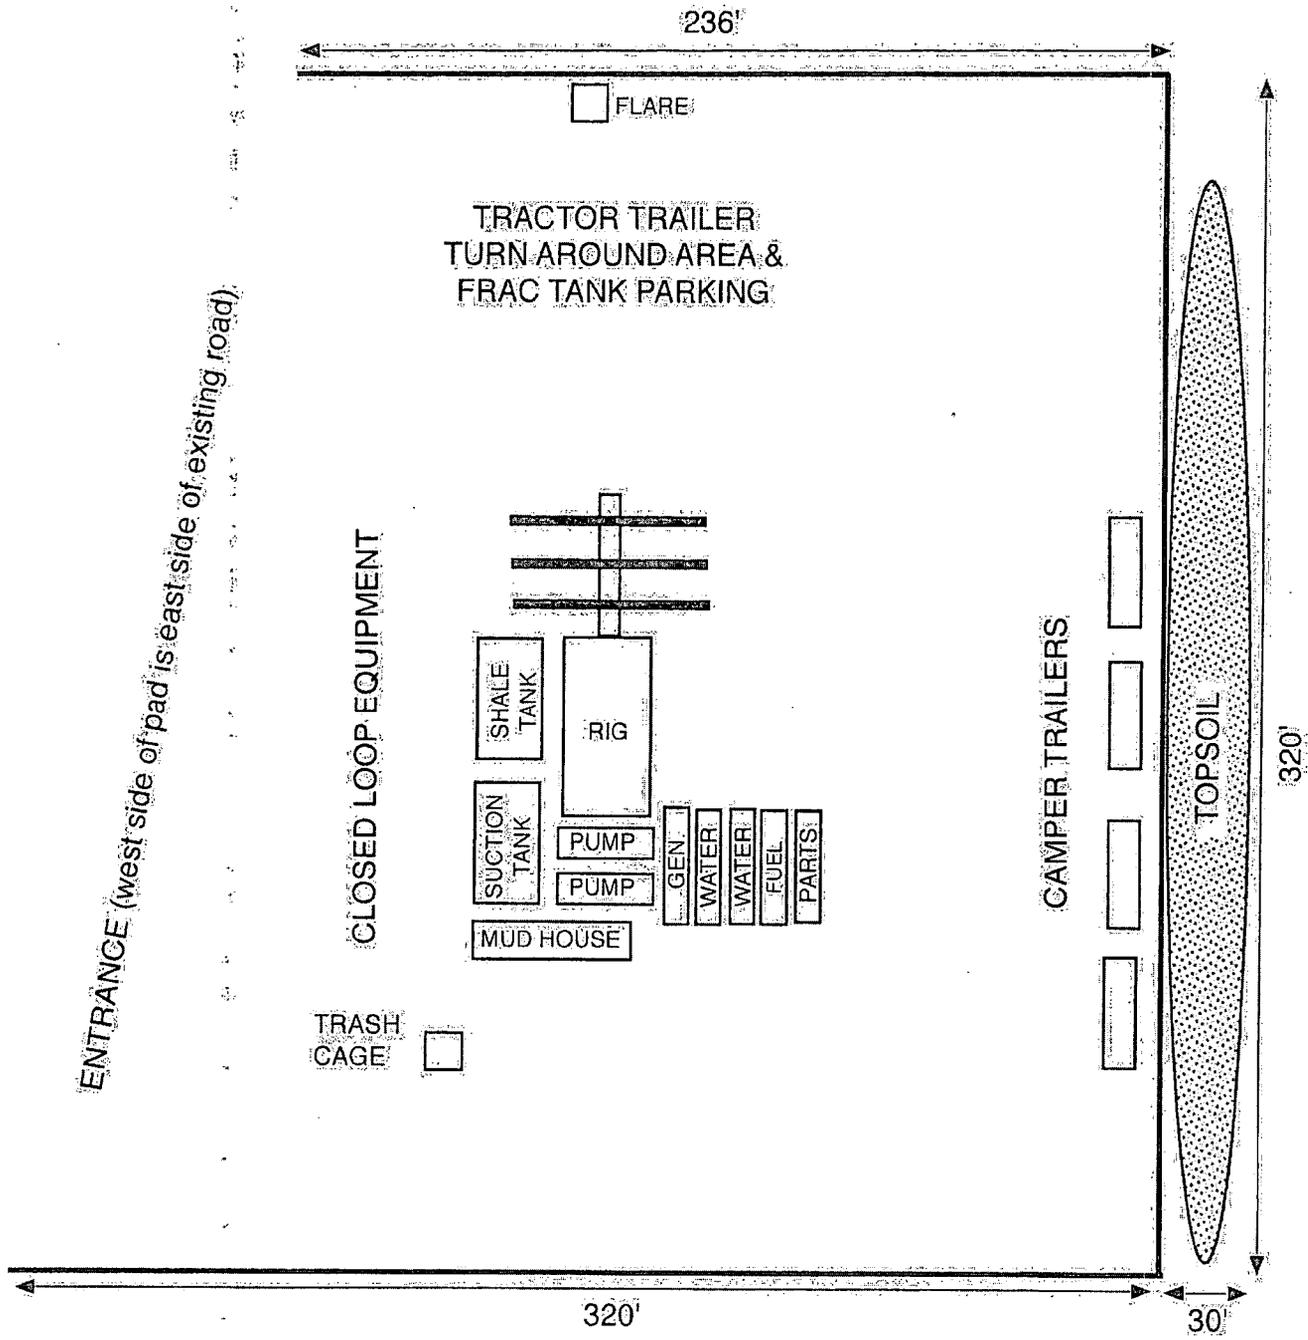

SECTION 22, TOWNSHIP 19 SOUTH, RANGE 25 EAST, N.M.P. MAP 13
 EDDY COUNTY, NEW MEXICO

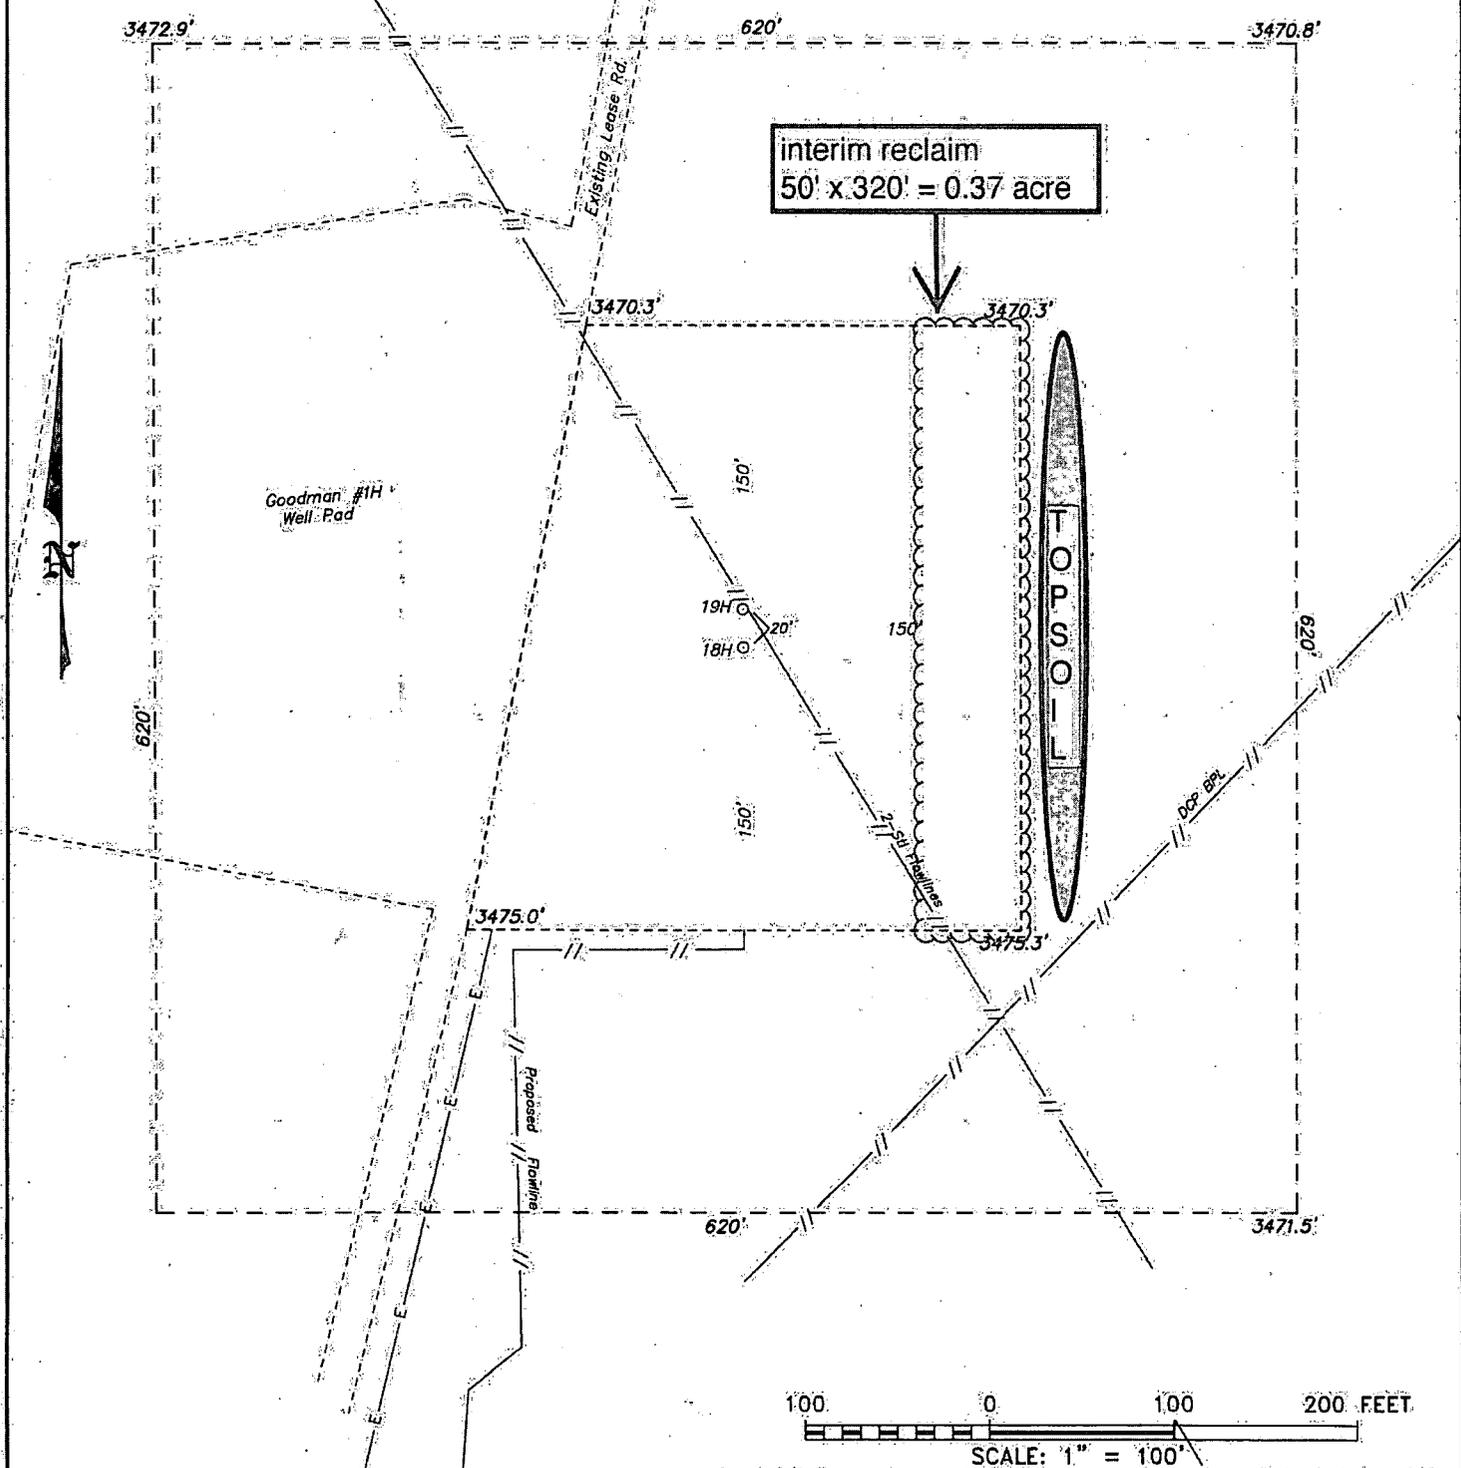


PERCUSSION PETROLEUM OPERATING, LLC
 REF: OSAGE BOYD 15 FEDERAL COM 19H / WELL PAD TOPO
 THE OSAGE BOYD 15 FEDERAL COM 19H LOCATED 431' FROM
 THE NORTH LINE AND 2370' FROM THE WEST LINE OF
 SECTION 22, TOWNSHIP 19 SOUTH, RANGE 25 EAST,
 N.M.P.M., EDDY COUNTY, NEW MEXICO.

basin surveys
 focused on excellence
 in the oilfield

P.O. Box 1786
 1120 N. West County Rd.
 Hobbs, New Mexico 88241
 (575) 393-7316 - Office
 (575) 392-2206 - Fax
 basin-surveys.com

SECTION 22, TOWNSHIP 19 SOUTH, RANGE 25 EAST, N.M.P. MAP 14
 EDDY COUNTY, NEW MEXICO.

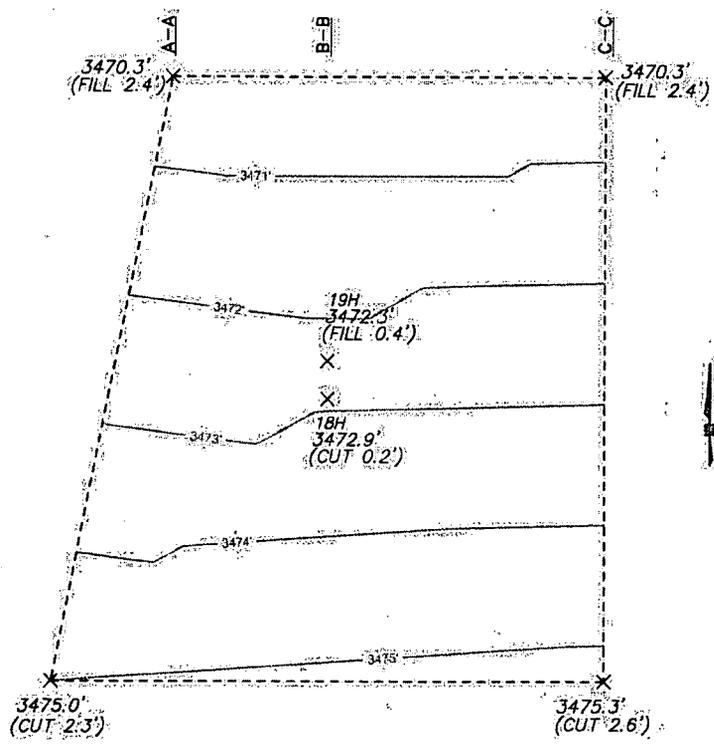

PERCUSSION PETROLEUM OPERATING, LLC





REF: OSAGE BOYD 15 FEDERAL COM 18H&19H/WELL PAD TOPO

THE OSAGE BOYD 15 FEDERAL COM 18H&19H LOCATED IN
 SECTION 22, TOWNSHIP 19 SOUTH, RANGE 25 EAST,
 N.M.P.M., EDDY COUNTY, NEW MEXICO.



P.O. Box 1786 (575) 393-7316 - Office
 1120 N. West County Rd. (575) 392-2206 - Fax
 Hobbs, New Mexico 88241 basin-surveys.com

SECTION 22, TOWNSHIP 19 SOUTH, RANGE 25 EAST, N.M.P. MAP 15
 EDDY COUNTY, NEW MEXICO.

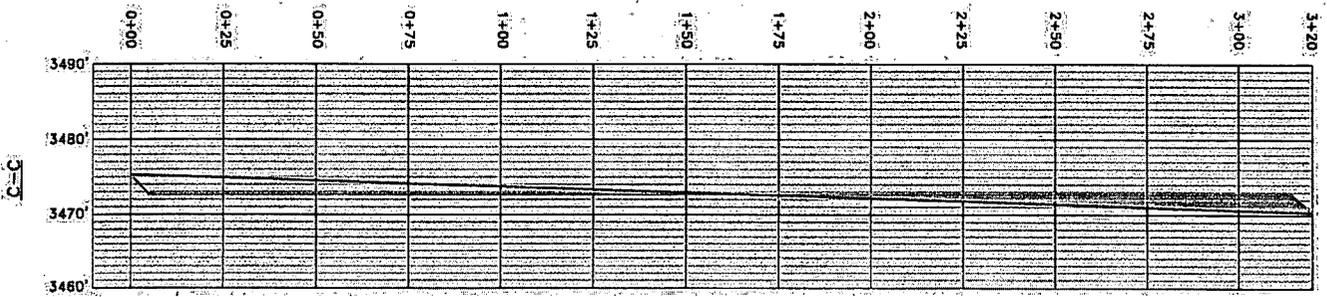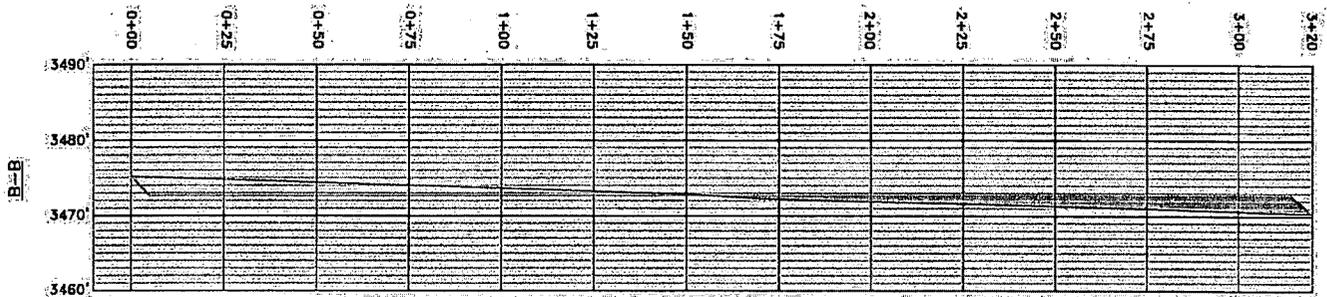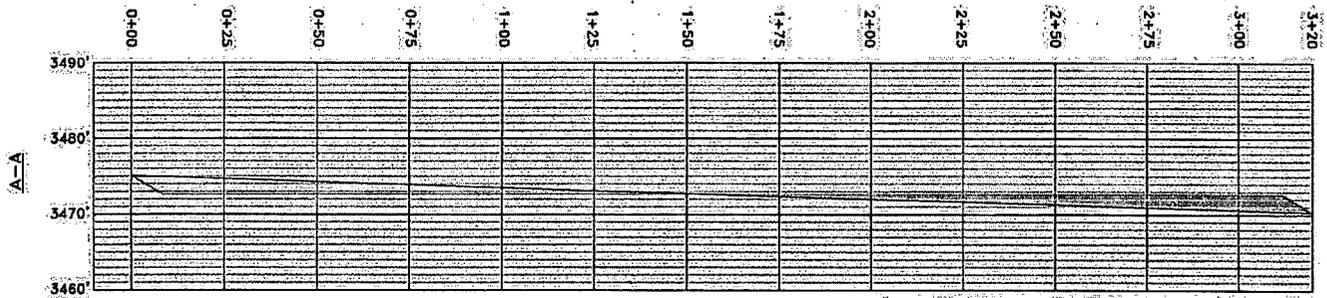

PERCUSSION PETROLEUM OPERATING, LLC

REF: OSAGE BOYD 15 FEDERAL COM 18H&19H/WELL PAD TOPO

THE OSAGE BOYD 15 FEDERAL COM 18H&19H LOCATED IN
 SECTION 22, TOWNSHIP 19 SOUTH, RANGE 25 EAST,
 N.M.P.M., EDDY COUNTY, NEW MEXICO.



P.O. Box 1786 (575) 393-7316 Office
 1120 N. West County Rd. (575) 392-2206 Fax
 Hobbs, New Mexico 88241 basinsurveys.com

Percussion Petroleum Operating, LLC
Osage Boyd 15 Federal Com 19H
SHL 431' FNL & 2370' FWL 22-19S-25E
Eddy County, NM

SURFACE PLAN PAGE 1

Disposal, Surface Use Plan

1. ROAD DIRECTIONS & DESCRIPTIONS (See MAPS 1 - 3)

From the junction of US 82 & US 285 in Artesia...

Go South 13.2 miles on US 285 to the equivalent of Mile Post 56.5

Then turn right and go West 4.6 miles on paved County Road 21 (Rocking R)

Then turn left and go SW 225' on a caliche road to the NW corner of the pad.
East side of the road is west side of the pad. No new road is needed.

Non-county roads will be maintained as needed to Gold Book standards. This includes pulling ditches and preserving the crown. This will be done at least once a year, and more often as needed.

2. ROAD TO BE BUILT OR UPGRADED (See MAP 3)

No new road is needed. Upgrade will consist of filling potholes with caliche as needed.

3. EXISTING WELLS (See MAP 4)

Existing oil, gas, water, disposal, and P & A wells are within a mile. No injection well is within a mile radius.

4. PROPOSED PRODUCTION FACILITIES (See MAPS 5 - 6E)

A 739.4' long $\approx 4"$ O D. HDPE flow line will be laid on the surface south and southwest to a proposed central tank battery (CTB). CTB will sit on the south side of Percussion's existing three well Ross Ranch Goodman pad. Maximum flow line operating pressure will be < 125 psi.

Percussion Petroleum Operating, LLC
Osage Boyd 15 Federal Com 19H
SHL 431' FNL & 2370' FWL 22-19S-25E
Eddy County, NM

SURFACE PLAN PAGE 2

A 555.1' long overhead raptor safe 3-phase power line will be built southwest to an existing power line on the side of the CTB.

A 1549.8' long 4" O. D. HDPE crude oil line will be laid on the surface from the CTB southwest to an existing crude oil line at Percussion's Ross Ranch 22 #2 pad. Maximum operating pressure will be <125 psi.

5. WATER SUPPLY (See MAP 7)

Water will be piped via temporary ≈12,400' long surface 10" Kevlar lay flat pipelines (2) from Percussion's existing lined fresh water pond on its own land in NE4 26-19s-25e. Pipeline route will not be bladed or excavated. Route is all private. Route follows existing roads, pads, and pipelines.

6. CONSTRUCTION MATERIALS & METHODS (See MAPS 8 - 11)

NM One Call (811) will be notified before construction starts. Percussion will move its two surface lines north and east of the pad. Top ≈6" of soil and brush will be stockpiled east of the pad. V-door will face north. Closed loop drilling system will be used. Caliche will be hauled from the existing Arkland caliche pit on private land. Arkland caliche pit is in NWNE 23-19s-25e.

7. WASTE DISPOSAL

All trash will be placed in a portable trash cage. It will be hauled to the Eddy County landfill. There will be no trash burning. Contents (drill cuttings, mud, salts, and other chemicals) of the mud tanks will be hauled to R360's state approved (NM-01-0006) disposal site at Halfway. Human waste will be disposed of in chemical toilets and hauled to the Artesia wastewater treatment plant.

Percussion Petroleum Operating, LLC
Osage Boyd 15 Federal Com 19H
SHL 431' FNL & 2370' FWL 22-19S-25E
Eddy County, NM

SURFACE PLAN PAGE 3

8. ANCILLARY FACILITIES

There will be no airstrip or camp. Camper trailers will be on location for the company man, tool pusher, and mud logger.

9. WELL SITE LAYOUT (See MAP 12)

Also see Rig Layout diagram for depictions of the well pad, trash cage, access onto the location, parking, living facilities, and rig orientation.

10. RECLAMATION (See MAPS 13 - 15)

Interim reclamation will be completed within 6 months of completing the well. Interim reclamation will consist of shrinking the well pad 0.37 acre by removing caliche and reclaiming 50' on the east side of the pad. This will leave 1.67 acres for the anchors, pump jacks, and tractor-trailer turn around. Disturbed areas will be contoured to match pre-construction grades. Soil and brush will be evenly spread over disturbed areas and harrowed on the contour. Disturbed areas will be seeded in accordance with surface owner's requirements.

Enough stockpiled topsoil will be retained to cover the remainder of the pad when the well is plugged. Once the last well is plugged, then the rest of the pad will be similarly reclaimed within 6 months of plugging. Noxious weeds will be controlled.

Percussion Petroleum Operating, LLC
Osage Boyd 15 Federal Com 19H
SHL 431' FNL & 2370' FWL 22-19S-25E
Eddy County, NM

SURFACE PLAN PAGE 4

Land use will be:

30' x 739.4' flowline = 0.51 acre
30' x 1549.8' crude oil line = 1.07 acres
30' x 555.1' power line = 0.38 acre
297.6' x 198.6' x 132.7' x 108.7' CTB = 0.55 acre
20' x 12,400' water line from pond = 5.69 acres
+ 236' x 320' x 320' x 331' well pad = 2.04 acres
10.24 acres short term
- 0.51 acre flowline
- 1.07 acres oil line
- 0.38 acre power line
- 5.69 acres water line from pond
- 0.37 acre interim reclamation on well pad
2.22 acres (0.55 ac. CTB + 1.67 ac. pad) long term

11. SURFACE OWNER

Well pad, CTB, flow line, power line, and 692.4' of oil line construction will be on private land (NWNW & E2NW4 22-19s-25e) owned by Jerome Hugh Jones et al and leased to Ross Ranch, P. O. Box 216, Lakewood NM 88254. Phone number is (575) 365-4797. Percussion has an agreement with the Ranch.

Remaining 857.4' of oil line construction will be on private land (SWNW 22-19s-25e) owned by Ross & Barbara Whitney Trust, 25601 E. 130th St., Greenwood MO 64034. Phone number is (816) 525-1233. Percussion has an agreement with the Trust.

12. OTHER INFORMATION

On-site inspection was held with Matt Wirth (BLM) on July 12, 2018.


Lone Mountain inspected the well pad and submitted archaeology report NMCRI-141118 on August 7, 2018.

Percussion Petroleum Operating, LLC
Osage Boyd 15 Federal Com 19H
SHL 431' FNL & 2370' FWL 22-19S-25E
Eddy County, NM

SURFACE PLAN PAGE 5

CERTIFICATION

I hereby certify that I, or someone under my direct supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exist; that I have full knowledge of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U. S. C. 1001 for the filing of false statements. Executed this 21st day of October, 2018.



Brian Wood, Consultant
Permits West, Inc.
37 Verano Loop, Santa Fe, NM 87508
(505) 466-8120 FAX: (505) 466-9682 Cellular: (505) 699-2276

Field representative will be:

Lelan Anders, Operations Manager
Percussion Petroleum Operating, LLC
919 Milam, Suite 2475
Houston TX 77002
Office: (713) 429-1291
Mobile: (281) 908-1752

October 21, 2018

To Who It May Concern:

Osage Boyd 15 Federal Com 19H well pad, CTB, flow line, power line, and 692.4' of oil line construction will be on private land (NWNW & E2NW4 22-19s-25e) owned by Jerome Hugh Jones et al and leased to Ross Ranch, P. O. Box 216, Lakewood NM 88254. Phone number is (575) 365-4797. Percussion has an agreement with the Ranch.

Remaining 857.4' of oil line construction will be on private land (SWNW 22-19s-25e) owned by Ross & Barbara Whitney Trust, 25601 E. 130th St., Greenwood MO 64034. Phone number is (816) 525-1233. Percussion has an agreement with the Trust.

A handwritten signature in black ink, appearing to read "B. Wood". The signature is written in a cursive, flowing style.

Brian Wood

Section 1 - General

Would you like to address long-term produced water disposal? NO

Section 2 - Lined Pits

Would you like to utilize Lined Pit PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Lined pit PWD on or off channel:

Lined pit PWD discharge volume (bbl/day):

Lined pit specifications:

Pit liner description:

Pit liner manufacturers information:

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal permit:

Lined pit precipitated solids disposal schedule:

Lined pit precipitated solids disposal schedule attachment:

Lined pit reclamation description:

Lined pit reclamation attachment:

Leak detection system description:

Leak detection system attachment:

Lined pit Monitor description:

Lined pit Monitor attachment:

Lined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?

Lined pit bond number:

Lined pit bond amount:

Additional bond information attachment:

Section 3 - Unlined Pits

Would you like to utilize Unlined Pit PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Unlined pit PWD on or off channel:

Unlined pit PWD discharge volume (bbl/day):

Unlined pit specifications:

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal permit:

Unlined pit precipitated solids disposal schedule:

Unlined pit precipitated solids disposal schedule attachment:

Unlined pit reclamation description:

Unlined pit reclamation attachment:

Unlined pit Monitor description:

Unlined pit Monitor attachment:

Do you propose to put the produced water to beneficial use?

Beneficial use user confirmation:

Estimated depth of the shallowest aquifer (feet):

Does the produced water have an annual average Total Dissolved Solids (TDS) concentration equal to or less than that of the existing water to be protected?

TDS lab results:

Geologic and hydrologic evidence:

State authorization:

Unlined Produced Water Pit Estimated percolation:

Unlined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?

Unlined pit bond number:

Unlined pit bond amount:

Additional bond information attachment:

Section 4 - Injection

Would you like to utilize Injection PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Injection PWD discharge volume (bbl/day):

Injection well mineral owner:

Injection well type:

Injection well number:

Assigned injection well API number?

Injection well new surface disturbance (acres):

Minerals protection information:

Mineral protection attachment:

Underground Injection Control (UIC) Permit?

UIC Permit attachment:

Injection well name:

Injection well API number:

Section 5 - Surface Discharge

Would you like to utilize Surface Discharge PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Surface discharge PWD discharge volume (bbl/day):

Surface Discharge NPDES Permit?

Surface Discharge NPDES Permit attachment:

Surface Discharge site facilities information:

Surface discharge site facilities map:

Section 6 - Other

Would you like to utilize Other PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Other PWD discharge volume (bbl/day):

Other PWD type description:

Other PWD type attachment:

Have other regulatory requirements been met?

Other regulatory requirements attachment:



Bond Information

Federal/Indian APD: FED

BLM Bond number: NMB001424

BIA Bond number:

Do you have a reclamation bond? NO

Is the reclamation bond a rider under the BLM bond?

Is the reclamation bond BLM or Forest Service?

BLM reclamation bond number:

Forest Service reclamation bond number:

Forest Service reclamation bond attachment:

Reclamation bond number:

Reclamation bond amount:

Reclamation bond rider amount:

Additional reclamation bond information attachment: