Form 3160-5 (June 2015)	BUNDRY	UNITED STATES EPARTMENT OF THE INTERIOR UREAU OF LAND MANAGEMENT NOTICES AND REPORTS ON WELLS is form for proposals to drill or to re-enter an II. Use form 3160-3 (APD) for such proposals.		OMB N Expires: J. 5. Lease Serial No. NMNM93771			
SUBMIT IN TRIPLICATE - Other instructions on page 2					7. If Unit or CA/Agre	ement, Name and/or No.	
Type of Well ☐ Gas Well ☐ Other						8. Well Name and No. SHUGART WEST 24 FEDERAL 1	
Name of Operator Contact: MELISSA SZUDERA MARATHON OIL PERMIAN LLC E-Mail: mszudera@marathonoil.com					9. API Well No. 30-015-31340-0	9. API Well No. 30-015-31340-00-S1	
3a. Address 5555 SAN FELIPE ST HOUSTON, TX 77056			3b. Phone No. (include area code) Ph: 713-296-3179		10. Field and Pool or SHUGART	10. Field and Pool or Exploratory Area SHUGART	
4. Location of Well (Footage, Sec., T., R., M., or Survey Description)					11. County or Parish,	11. County or Parish, State	
Sec 24 T18S R30E NESE 2310FSL 330FEL					EDDY COUNT	EDDY COUNTY, NM	
12.	CHECK THE AF	PPROPRIATE BOX(ES)	TO INDICATE NA	TURE OF N	OTICE, REPORT, OR OT	HER DATA	
TYPE OF S	UBMISSION	TYPE OF ACTION					
Motice of I	of Intent	☐ Acidize	Deepen		Production (Start/Resume)	☐ Water Shut-Off	
		☐ Alter Casing	☐ Hydraulic Fr	acturing	Reclamation	Well Integrity	
☐ Subsequen	it Report	□ Casing Repair	□ New Constru	iction	Recomplete	Other	
☐ Final Abar	oandonment Notice	☐ Change Plans	Plug and Ab	andon 🗆	emporarily Abandon		
		☐ Convert to Injection	☐ Plug Back		Water Disposal		
If the proposal Attach the Bon following com testing has bee determined tha	is to deepen directional under which the word pletion of the involved in completed. Final Abut the site is ready for final and	ally or recomplete horizontally rk will be performed or provide I operations. If the operation re pandonment Notices must be fi	give subsurface locations the Bond No. on file with sults in a multiple comple	and measured a BLM/BIA. Retion or recompleents, including r	e of any proposed work and appround true vertical depths of all pertiquired subsequent reports must betion in a new interval, a Form 31 eclamation, have been completed	nent markers and zones. e filed within 30 days 60-4 must be filed once and the operator has	
2) SPOT 25 3) P. S. 35 S 4) P. S. 35 S 5) P. S. 40 S 6) P. S. 35 S 7) P. S. 40 S	SXS OF CLASS C	H CMT ON PLUG @ 7,70 CCMT @ 5,830? ?-5,370: CCMT @ 4,335? 2 4,235: CCMT @ 2,440? ? 2,340: CCMT @ 1,950? ? 1,850: CCMT @ 830? ? 730?; W CCMT @ 100? ? SURFA	OC & TAG		ATTACHED FO		
CLOSED LO	N FLUIDS BETWE DOP SYSTEM S TO LICENSED F	EEN ALL PLUGS	wed for record NN	CON	DITIONS OF AP	PROVAL	
Below	ground	level dry		- Ker r	equired NMOI	L CONSERVATION	
14. I hereby certi	fy that the foregoing is	Electronic Submission #	477162 verified by the N OIL PERMIAN LLC,	BLM Well Inf	formation System arlsbad	AUG 21 2019	
Name (Printed	/Typed) MELISSA	SZUDERA	Title	REGULATO	DRY COMPLIANCE REP	RECEIVED	
			I				

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Date

Approved By

(Electronic Submission)

Title

08/08/2019

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Signature

(Instructions on page 2)
** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED **



Additional data for EC transaction #477162 that would not fit on the form


32. Additional remarks, continued

INSTALL BELOW GROUND DHM

Marathon Oil

Wellbore Schematic Well Name: SHUGART WEST 24 FEDERAL 1

Field Name SHUGART State/Province NEW MEXICO North/South Reference Country UNITED STATES North/South Distance (ft) 32.73188800 -103.91756700 2,310.0 **FSL** KB-Ground Distance (ft) API/ IPO UWI KB-Muditine Distance (ft) Ground Elevation (ft) Drilling Rig Spud Date Well Original Completion Dal Well First Production Date 3001531340 13.00 3,632.00 5/31/2016

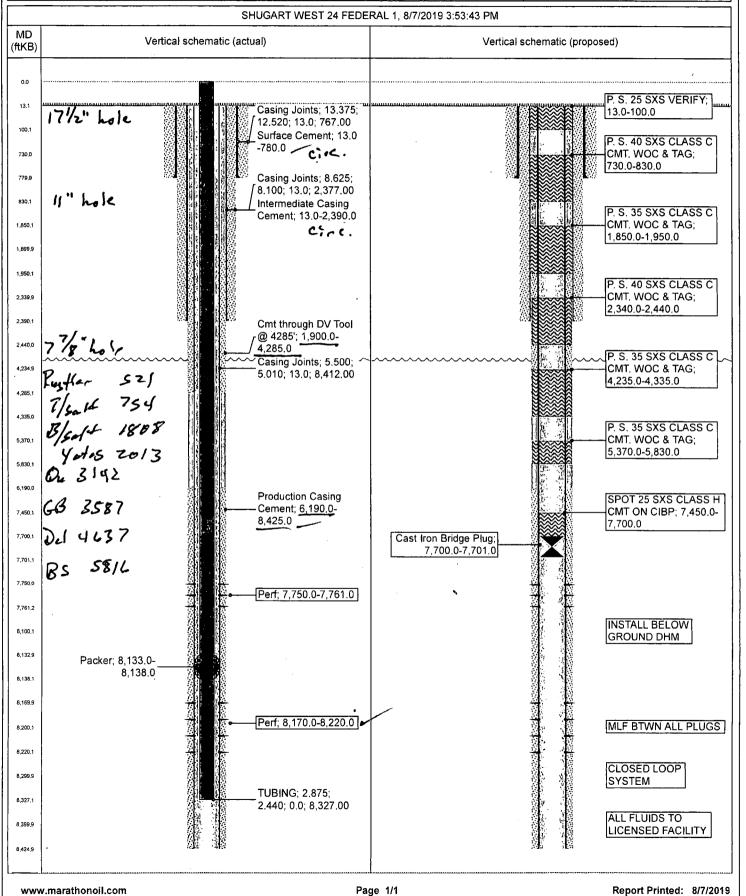

BUREAU OF LAND MANAGEMENT Carlsbad Field Office 620 East Greene Street Carlsbad, New Mexico 88220 575-234-5972

Permanent Abandonment of Federal Wells Conditions of Approval (LPC Habitat)

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within <u>ninety (90)</u> days from the approval date of this Notice of Intent to Abandon.

If you are unable to plug the well by the 90th day provide this office, prior to the 90th day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.

The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.

- 2. <u>Notification</u>: Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Eddy County, call 575-361-2822; Lea County, call 575-393-3612.
- 3. <u>Blowout Preventers</u>: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.
- 4. <u>Mud Requirement:</u> Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of brine water. Minimum nine (9) pounds per gallon.
- 5 <u>Cement Requirement</u>: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. Before pumping or bailing cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

6. Below Ground Level Cap (Lesser Prairie-Chicken Habitat): All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The BLM is to be notified a minimum of 4 hours prior to the wellhead being cut off to verify that cement is to surface in the casing and all annuluses. Wellhead cut off shall commence within ten (10) calendar days of the well being plugged. If the cut off cannot be done by the 10th day, the BLM is to be contacted with justification to receive an extension for completing the cut off. Upon the plugging and subsequent abandonment of wells that are located in lesser prairie-chicken habitat, the casings shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The well bore shall then be covered with a metal plate at least ¼ inch thick and welded in place. A weep hole shall be left in the plate and/or casing.

NMOCD also requires the operator to notify NMOCD when this type of dry hole marker is used. This can be done on the subsequent report of abandonment which is submitted to the BLM after the well is plugged. State that a below ground cap was installed as required in the COA's from the BLM.

- 7. Subsequent Plugging Reporting: Within 30 days after plugging work is completed, file one original and three copies of the Subsequent Report of Abandonment, Form 3160-5 to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. Show date well was plugged.
- 8. <u>Trash:</u> All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration will be required. See attached reclamation objectives.

<u>Timing Limitation Stipulation/Condition of Approval for Lesser Prairie-Chicken:</u>
From March 1st through June 15th annually, abandonment activities will be allowed except between the hours from 3.00 am and 9.00 am. Normal vehicle use on existing roads will not be restricted