

Gissler B (A2) #27

Sec-TWN-RNG: 12-17S-30E
FOOTAGES: 1980' FSL & 685' FWL

API: 30-015-25987
GL: 3570
KB: 3585



COMMENTS

Plug #3

Plug #2

Plug #1

Perfs: 2961-3031

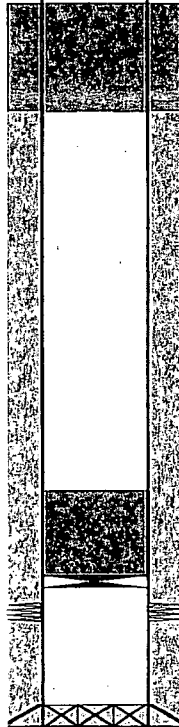

B

PBTD: 3,558 MD

CASING DETAIL

#	HOLE SIZE	CSG SIZE	WGHT	GRADE	Top	Bottom	Sx Cmt	Circ/TOC	TOC Method
A	12 1/4	8 5/8	24	J-55	0	428	300	1" to Surface	
B	7 7/8	5 1/2	17		0	3,558	700	1270'	

FORMATION TOPS

FORMATION	TOP
T. Salt	510
B. Salt	1300
Red Sand	2335
Grayburg	2745
San Andres	3050
Lovington	3125

Perforation Detail

Formation	Top	Bottom	Treatment	Notes
Metex & Premier	2981	3031	Acidized and frac'd	

Plug Detail

#	SX	CMT CLASS	TOP	BTM	DESCRIPTION
1	25	C	2680	2930	CIBP @ 2930' w/ 25sx. Open perfs
2	28	C	1230	1350	Squeeze in/out plug, B. Salt
3	135	C	0	480	Circ. In/out plug, 8 5/8 csg. Shoe and surface plug

ADDITIONAL DETAIL

11/19/91 - converted to injection well. Ran 2 3/8" cmt lined tbg and 5 1/2" plastic coated packer set at 2,937' at 10,000# tension.
annulus filled w/ treated fresh water. Inedding into original producing perfs

Prepared by: JDE

Date: 8/7/2019