Form 3160-5

## INITED STATES

FORM APPROVED

DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT  SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.					OMB NO. 1004-0137 Expires: January 31, 2018  5. Lease Serial No. NMNM69369  6. If Indian, Allottee or Tribe Name			
SUBMIT IN TRIPLICATE - Other instructions on page 2					7. If Unit or CA/Agreement, Name and/or No.			
1. Type of Well  ☑ Oil Well ☐ Gas Well ☐ Other					8. Well Name and No. SUNDANCE 1 FED 1			
Name of Operator     OXY USA INCORPORATED	DAVID STEW/ wart@oxy.com	ART		9. API Well No. 30-015-21291-00-S1				
3a. Address 5 GREENWAY PLAZA SUIT HOUSTON, TX 77046-0521	3b. Phone No. (include area code) Ph: 432.685.5717			10. Field and Pool or Exploratory Area MESAVERDE				
4. Location of Well (Footage, Sec., T., R., M., or Survey Description)			11. County or Parish, State					
Sec 1 T24S R31E SENW				EDDY COUNTY, NM				
12. CHECK THE A	PPROPRIATE BOX(ES)	TO INDICAT	E NATURE O	F NOTICE,	REPORT, OR O	THER DATA		
TYPE OF SUBMISSION	TYPE OF ACTION							
Notice of Intent     ■     Notice of Intent     Notice of Inten	☐ Acidize ☐ E		eepen		on (Start/Resume)	☐ Water S	hut-Off	
<del></del>	☐ Alter Casing	Casing Hydraulic Fracturing		☐ Reclama	□ Reclamation		tegrity	
☐ Subsequent Report	☐ Casing Repair	Repair New Construct		☐ Recomp	nplete			
☐ Final Abandonment Notice	☐ Change Plans	Plans   Plug and Abandon   Temp		☐ Tempora	rily Abandon			
	☐ Convert to Injection ☐ Plug Back ☐ W		□ Water D	isposal				
20" 94# csg @ 582' w/ 1060s 8-5/8" 24-32# csg @ 4375' w 5-1/2" 15.5-17# csg @ 8600' Add. Spot Plug 1. RIH & set CIBP @ 5904", 2. M&P 35sx cmt @ 4500-4' 3. M&P 25sx cmt @ 2850-2' 4. Rorf @ 1340' sqz 35sx cm 5. Perf @ 790' sqz 215sx cm 10# MLF between plugs-Abo	nally or recomplete horizontally, ork will be performed or provide and operations. If the operation restandonment Notices must be fill final inspection.  Perfs-5954-8328'  ex, 26" hole, TOC-Surf-Circle 1800sx, 11" hole, TOC-S, DVT @ 6298' w/1375sx,7  M&P 25sx cmt to 5745' 225' WOC-Tag  Televity WOC-	c the Bond No. on fissults in a multiple led only after all received for the Bond No. on fissults in a multiple led only after all received for the Bond No. on fissults in a multiple led only after all received for the Bond No. on fissults in a multiple led only after all received for the Bond No. on fissults in a multiple led only after the Bond No. on fissults in a multiple led only after the Bond No. on fissults in a multiple led only after the Bond No. on fissults in a multiple led only after the Bond No. on fissults in a multiple led only after the Bond No. on fissults in a multiple led only after the Bond No. on fissults in a multiple led only after all received for the Bond No. on fissults in a multiple led only after all received for the Bond No. on fissults in a multiple led only after all received for the Bond No. on fissults in a multiple led only after all received for the Bond No. on fissults in a multiple led only after all received for the Bond No. on fissults in a multiple led only after all received for the Bond No. on fissults in a multiple led only after all received for the Bond No. on fissults in a multiple led only after all received for the Bond No. on fissults in a multiple led only after all received for the Bond No. on fissults in a multiple led only after all received for the Bond No. on fissults in a multiple led only after all received for the Bond No. on fissults in a multiple led only after all received for the Bond No. on fissults in a multiple led only after all received for the Bond No. on fissults in a multiple led only after all received for the Bond No. on fissults in a multiple led only after all received for the Bond No. on fissults in a multiple led only after all received for the Bond No. on fissults in a multiple led on fissults in a multiple led only after all received for the Bond No. on fissults in a multiple led on fis	by the BLM Weled, well and measure of the blank with the blank well and the blank well an	red and true vert Required sind bimpletion in a ning reclamation SEE A COND  (DVT)  (Information Carlsbad on 09/06/2019	tical depths of all pesequent reports must ew interval, a Form have been completed by a Carlon Completed by a	Frinent markers and the filed within 30 3160-4 must be filed ed and the operator R-111-P  FOR FAPPRO FAPPRO	d zones. days ed once has blash  VAL  VATION	
Name(Printed/Typed) DAVID STEWART			RECEIVED					
Signature (Electronic	1	Date 09/06/2019						
	THIS SPACE FO	OR FEDERAL	OR STATE	OFFICE US	BE .			
Approved By			Title			Date		


Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.



Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

OXY USA Inc. - Current Sundance 1 Federal #1 API No. 30-015-21291

Fusfler 784
Salado 952
B/Salt 4265
Blahy 4274
Del 4508
Bell 4529
Cherry 5394
Brushy 6670
RC 8382

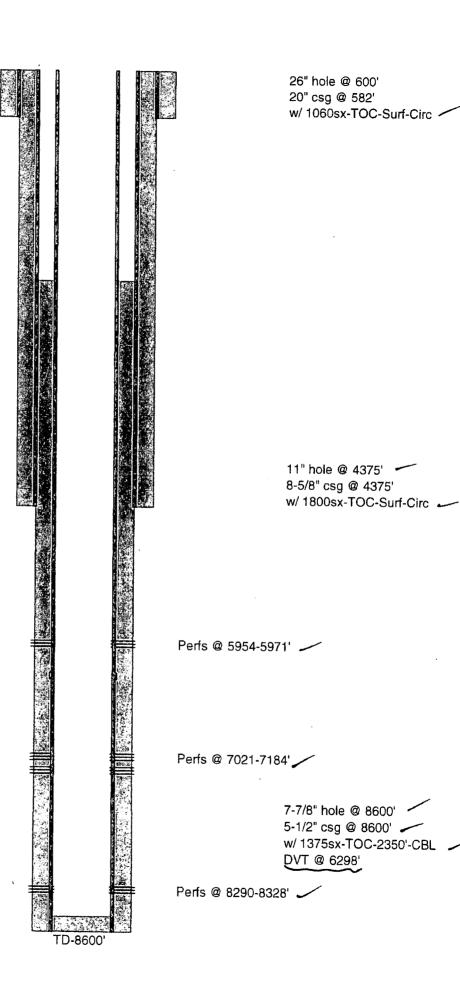

PB-8556'

OXY USA Inc. - Proposed Sundance 1 Federal #1 API No. 30-015-21291


215sx @ 790'-Surface

35sx @ 1340-1220' WOC-Tag

25sx @ 2850-2720' WOC-Tag

35sx @ 4500-4225' WOC-Tag

CIBP @ 5904' w/ 25sx to 5745'

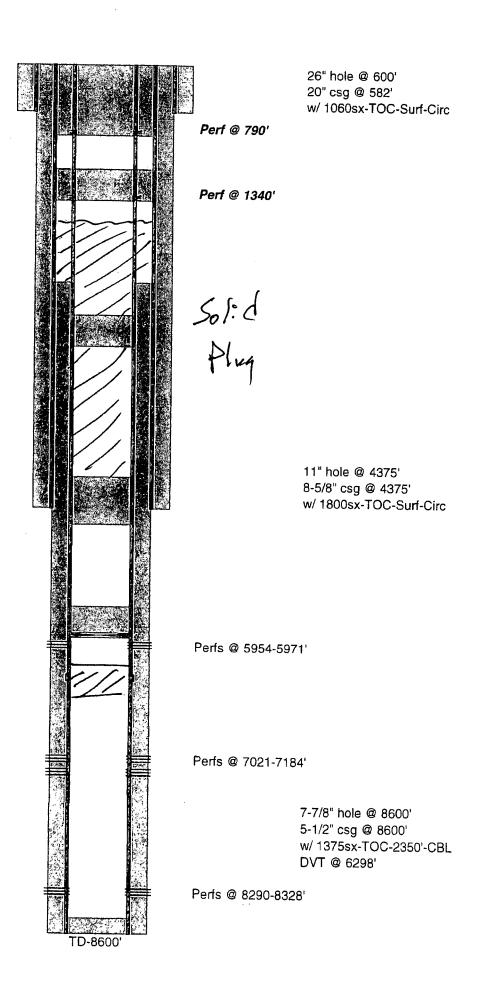

PB-8556'

## BUREAU OF LAND MANAGEMENT Carlsbad Field Office 620 East Greene Street Carlsbad, New Mexico 88220 575-234-5972

## Permanent Abandonment of Federal Wells Conditions of Approval (LPC Habitat)

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within <u>ninety (90)</u> days from the approval date of this Notice of Intent to Abandon.

If you are unable to plug the well by the 90<sup>th</sup> day provide this office, prior to the 90<sup>th</sup> day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.

The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.

- 2. <u>Notification:</u> Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Eddy County, call 575-361-2822; Lea County, call 575-393-3612.
- 3. <u>Blowout Preventers</u>: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.
- 4. <u>Mud Requirement:</u> Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of brine water. Minimum nine (9) pounds per gallon.
- 5. <u>Cement Requirement</u>: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. Before pumping or bailing cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

6. Below Ground Level Cap (Lesser Prairie-Chicken Habitat): All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The BLM is to be notified a minimum of 4 hours prior to the wellhead being cut off to verify that cement is to surface in the casing and all annuluses. Wellhead cut off shall commence within ten (10) calendar days of the well being plugged. If the cut off cannot be done by the 10<sup>th</sup> day, the BLM is to be contacted with justification to receive an extension for completing the cut off. Upon the plugging and subsequent abandonment of wells that are located in lesser prairie-chicken habitat, the casings shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The well bore shall then be covered with a metal plate at least ¼ inch thick and welded in place. A weep hole shall be left in the plate and/or casing.

NMOCD also requires the operator to notify NMOCD when this type of dry hole marker is used. This can be done on the subsequent report of abandonment which is submitted to the BLM after the well is plugged. State that a below ground cap was installed as required in the COA's from the BLM.

- 7. <u>Subsequent Plugging Reporting:</u> Within 30 days after plugging work is completed, file one original and three copies of the Subsequent Report of Abandonment, Form 3160-5 to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. <u>Show date well was plugged.</u>
- 8. <u>Trash:</u> All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration will be required. See attached reclamation objectives.

<u>Timing Limitation Stipulation/Condition of Approval for Lesser Prairie-Chicken:</u>
From March 1<sup>st</sup> through June 15<sup>th</sup> annually, abandonment activities will be allowed except between the hours from 3:00 am and 9:00 am. Normal vehicle use on existing roads will not be restricted