District I 1625 N. French Dr., Hobbs, NM 88240 District II 1301 W. Grand Avenue, Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 District IV

State of New Michiel
Energy Minerals and Natural Resources
Submit to appropriate District Office Oil Conservation Division JUN 1 5 2006

☐ AMENDED REPORT

1220 S. St. Fr	ancis Dr., S	Santa Fe, N	M 87505		Sant	a Fe, N	IM 875	05		MICC			ILLI VELE RELICITI
A DDI	LICAT	IONEC	ID DEDMI	IT TA DI	oni de	_ENTI	rd ni	TEDE	N DI I	UCRA	CK UD	A TO	D A ZONE
AIII	LICAT	IONT	Operator Na	me and Addres	S S	<u>-1514 I 1</u>	UK, DI	SIST IS.	111	81	<sup>2</sup> OGRIDN	umbe	D A ZONE
THOMPS	ON, J. Cl	LEO ODESSA	, TX 79768-	2577							2 APINup	nber	
	<sup>3</sup> PropertyCode <sup>5</sup> Propert								30	<del>-015-</del>	<del>, 544 :</del>	<u>၁ ၁</u>	II No.
	5.5 /	1	MES	A ARRIBA	Propert	yname						3	II NO.
20	<del>50</del> /		ProposedPool				T			10 Prop	osedPool2		
WILDCAT	Γ (BONE	SPRINC		1						тюр	005Cd1 0012		
	, , , , , , , , , , , , , , , , , , , ,				<sup>7</sup> Surfac	e Loca	tion						
UL or lot no.	Section	Township	Range	LotId		from the		outh line	Feetf	rom the	East/Westl	ine	County
Н	10	22-S	26-E		2310'		NORT	ГН	330'		EAST	:	EDDY
			<sup>8</sup> Pro	posed Botto	m Hole Loc	ation If	Differer	nt From	Surface	;			,
UL or lot no.	Section	Township		l_ot Id		from the	1	outh line	1	rom the	East/Westl	ine	County
		L					<u> </u>		L				
1					<u>ditional W</u>		ormati	on		_,			
_	Type Code		12 Well Type	i		ble/Rotary			<sup>14</sup> Lease Ty P	pe Code			und Level Elevation
N 16 M	fultiple		17 Proposed I		ROTARY	ormation			19 Contr	actor	3	186'	20 Spud Date
NO	<b></b>		6500	•	BONE SPR			JW D	RILING	3			7/2006
Depth to Gro	undwater			Distance	fromnearestfr	esh water	well		D	istance fror	nnearestsurf	acewa	ater
Pit: Liner	: Synthetic	X	milsthick Clay	Pit Volu	ıme: bbl	s	Drilli	ngMetho	d:				
	ed-Loop Sys		·				Fresh V	Vater 🔀	Brine [	Diesel/C	il-hased	Gas/	Air 🗔
1	ш воср вуб			21 <b>D</b>	ad Casina						<u> </u>		
<b>\</b>		1			ed Casing	and C	ement	Progra	um				
Hole S	Size		asing Size		weight/foot		Setting D	epth		Sacks of Ce			Estimated TOC
17 1/2		13 3/8		48		500		500			SURFACE		
12 1/4		8 5/8		32		2500		1200					FACE
7 7/8		5 1/2		17		6500			1200	<u> </u>	2	2000	
Verit	<u> </u>		14 L		T	-							
		le - be	If this application	onis to DEEPE	Nor PLUG B	ا <b>ر 5</b> ACK, give	e the data of	on the pre	esent prod	uctivezone	e and propose	ednev	v productive zone.
Describe the	blowout pre	evention pro	ogram, if any. U	se additionalsh	neets if necessa	ary.		p			• una propose		, productive zone.
DRILL TO	500', SE	T 13 3/8	CSG AND C	CEMENT T	O SURFAC	CE							
DRILL TO	2500', S	ET WIT	H FRESH W	ATER ANI	NATIVE	SOLIDS	S; SET	9 5/8 C	SG ANI	О СЕМЕ	ENT TO SU	URF	ACE
							,						
DRILL TO	TD WII	H / 7/8	BIT AND SE	ET 5 1/2 17#	‡ J-55.								
								NOTI	FY OC	ID OF	SPUD &		
										/ITNES			
							CEMENTING OF SURFACE &						
INTERMEDIATE CASING													
<sup>23</sup> I hereby ce	rtify that th	e information	on given above is	s true and com	plete to the bes	t		OII (			TIONIDI		· · · · · · · · · · · · · · · · · · ·
of my knowledge and belief. I further certify that the drilling pit will be					ļ		OIL (	JUNS.	EKVA	TIONDI	VIS	ION	
constructed according to NMOCD guidelines X, a general permit \( \subseteq \), or					Appr	oved by:		_			<b>.</b> .		
an (attached) alternative OCD-approved plan						·	_		G. ARE				
Printed name	: JEFF I	BRYDEN	1/0/1/	Justo	<u> </u>	Title:		log was			ICI II G	EO]	LOGIST
Title:	GEOL	OGIST	1111			Appro	oval Date	JUN 2	s o zu	ĥ <sub>O</sub> <sup>2</sup> E	Expiration Dat	te:	111N 0 - 000
E-mail Addre	ess: Jbryde	en@nts-o	nline.net									•	JUN 2 0 2007
	12/2006		Phone:	(432)550-	0007	Cond	itionsof A	pproval A	Attached				
00/	12/2000		1	(432)330-	000/			ppiorum	reading .				

DISTRICT 1 1625 N. French Dr., Hobbs, NM 88240

DISTRICT II 1301 W. Grand Ave., Artesia, NM 88210

DISTRICT III 1000 Rio Brazos Rd., Aztec, NM 87410

DISTRICT IV 1220 St. Francis Dr., Santo Fe, NM 87505

State of New Mexico Energy, Minerals and Natural Resources Department

OIL CONSERVATION DIVISION

Revised October 12, 2005 Submit to Appropriate District Office

State Lease-4 copies

RECEIVED

Fee Lease-3 copies

Form C-102


JUN 1 5 2006


AMENDED REPORT WELL LOCATION AND ACREAGE DEDICATION PLAT

1220 South St. Francis Drive Santa Fe, NM 87505

<sup>1</sup> API Number			0	2Pool Code 6 \$ 3		Wildcat: Bone Spring					
Property Code				<sup>5</sup> Property Name MESA ARRIBA				1 3	<sup>8</sup> Well Number 3		
<sup>7</sup> OGRID No. 11181 J. CLEO THO				O THOMP	80perator N SON & JAMES		<sup>9</sup> Elevation 3186				
					<sup>10</sup> Surface L	ocation					
L or lot no. H	Section 10	Township 22-S	Range 26-E	Lot Idn	Feet from the 2310'	North/South line North	Feet from the 330'	East/West line <b>East</b>	County Eddy		
		<u> </u>	11 Bo	ottom Hol	e Location If	Different From	Surface				
IL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	7County		
Dedicated Acres	13 <sub>Jo</sub>	int or Infill	1-Consolid	ation Code	<sup>15</sup> Order No.	1			<u></u>		

#### NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION.

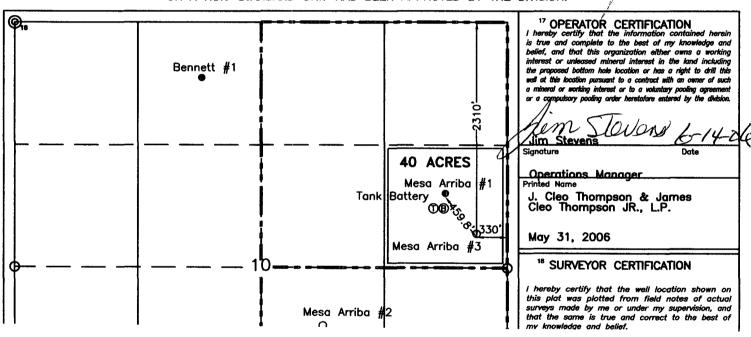

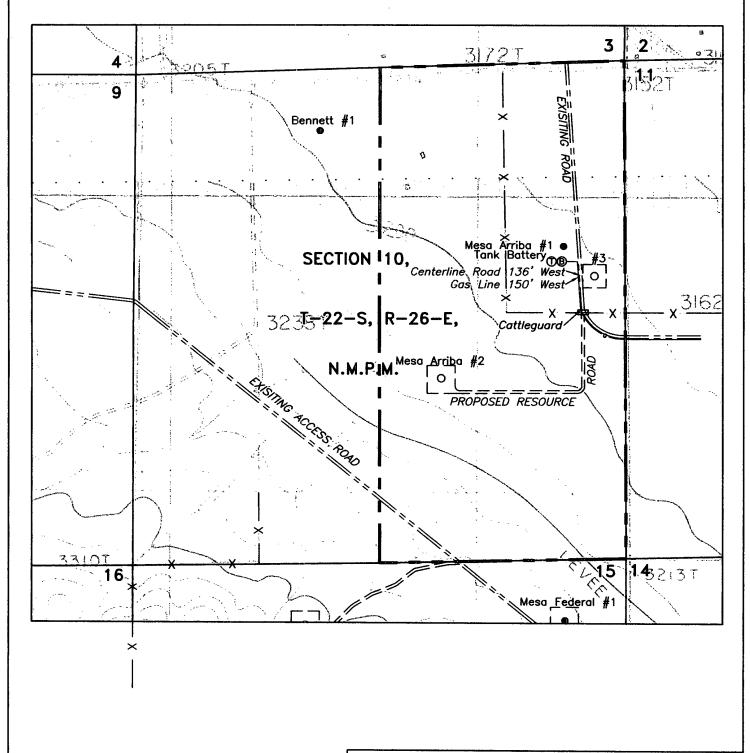

#### LEGEND OF SYMBOLS

= Access Road Resource Road on Lease
Resource Road on State Land
Resource Road on Private Land
Resource Road on Federal Land Proposed Resource Road

= Staked Well Location = Found 1" Iron Pipe with Brass Cap = Found 2" or 3" Iron Pipe with Brass Cap

Unit or Lease Boundary

#### EXHIBIT "A" ACCESS ROAD MAP

J. Cleo Thompson & James Cleo Thompson, Jr., L.P.

MESA ARRIBA NO. 3 Located 2310' FNL & 330' FEL, Section 10, T-22-S, R-26-E, NMPM, Eddy County, NM

Drawn by: Gene M. Rodriguez	Scale: 1" = 1000'
Date: May 30, 2006	Jim Stevens
Checked by: J.S. Piper	Sheet 1 of 1

Tuesday, June 13, 2006

Mr. Bryan Arrant NMOCD Artesia, New Mexico



Re:

Mesa Arriba #3

10-22S-26E

Eddy County, New Mexico

30-015-34955

The BOP pipe rams will be function tested on a daily basis and the blind rams will be function tested on all trips due to the close proximity of dwellings. This of course will follow the NU and testing of the BOPE. We are also including a H2S contingency plan because of the proximity of dwellings.

We will also take 100 ft. samples of the Capitan Reef from 500 ft to the top of the Delaware (approx. 2300 ft).

Jeff/Bryden

Sincerely

Geologist

J Cleo Thompson



MM Safety Inc. DBA:
Master Marketing & Safety
P.O. Box 69338
Odessa, Texas 79769



# **H2S CONTINGENCY PLAN**

J. Cleo Thompson

Mesa Arriba #3
Unit H: Section 10, Township 22 South,
2310' North Line, 330' East Line
Eddy County, NM

# TABLE OF CONTENTS

Table of contents	Page 2
Scope & Objectives	Page 3
General Emergency Plan	Page 4
J. Cleo Thompson emergency call out numbers	Page 5
Emergency notification numbers	Page 6
Additional Emergency notification numbers	Page 7
Emergency procedures of uncontrollable release of H <sub>2</sub> S gas	Page 8
Ignition procedures for uncontrollable well conditions	Page 9
Instructions for igniting the well	Page 10
Emergency equipment requirements	Page 11 & 12
Toxic effects of H <sub>2</sub> S	Page 13
Physical affects	Page 14
Toxicity of Hydrogen Sulfide (H <sub>2</sub> S)	Page 15
SCBA instructions	Page 16
H2S poisoning rescue and first aid	Page 17
Map of Mesa Arriba #3	Page 18

#### **SCOPE**

This plan establishes **J. Cleo Thompson** guidelines for all company and contract employees whose duties may involve exposure to hydrogen sulfide gas (H<sub>2</sub>S) on the **Mesa Arriba #3.** This lease is located 2310 feet from the north line, 330 feet from the east line in Section 10 of Township 22 -S, of Eddy County, New Mexico. This plan also establishes procedure for isolation of the work site and evacuating the public on the condition that:

- A. There is a release of H<sub>2</sub>S that encompasses the radius of exposure (ROE) in this plan and,
- B. There are persons and/or roads within the ROE and,
- C. There is the endangerment of human or animal life within the ROE.

## **OBJECTIVE**

#### The objective of the J. Cleo Thompson Company is to:

- A. Prevent any and all accidents, and to prevent the uncontrolled release of H<sub>2</sub>S into the atmosphere and,
- B. Provide proper evacuation procedures to cope with emergencies and,
- C. Provide immediate and adequate medical attention should an injury occur.

It should be noted that J. Cleo Thompson does not expect there top be any release of  $H_2S$  into the atmosphere but has taken the necessary steps to react properly to and control any hazards encountered on any of our facilities.

#### **GENERAL EMERGENCY ACTION**

#### In the event of an emergency, the following action should be initiated,

- 1. All personnel shall immediately evacuate to an up-wind and up-hill "safe breathing" area.
- 2. Those who must enter the hazard area must wear positive pressure selfcontained breathing apparatus and must use other appropriate safety equipment as outlined on page 10.
- 3. Isolate the well, if possible.
- 4. Use the "Buddy System" at all times.
- 5. Account for all personnel and take appropriate action as necessary for personnel safety.
- 6. Display the appropriate color warning flag to describe the type of emergency.
- 7. Contact *J. Cleo Thompson* personnel at the earliest time available according to the emergency call out list on Page 4.

The **J. Cleo Thompson** supervisor will assess the situation and assign duties to various persons to bring the situation under control. The **J. Cleo Thompson** supervisor will assign the notification of local emergency response agencies and residents. Media inquiries are to be referred to:

J. Cleo Thompson 325 North St. Paul, Suite 4300 Dallas, Texas 75201

# J. Cleo Thompson Emergency Call Out Numbers

NAME	OFFICE NUMBER	CELLULAR NUMBER	HOME NUMBER
Johnnie Holder			
Drilling Foreman	(432) 550-8887	(432) 556-9325	(432) 363-8054
Jim Stevens			
Operations Manger	(432) 550-8887	(432) 664-2917	(432) 563-5504
Amador Pando			
Production Foreman	(505) 677-2396	(505) 746-7324	(505) 677-2396
Gary Moreau			
Pumper	(505) 677-2396	(505) 631-5643	

J. Cleo Thompson is aware and will abide by city; county and state burn ban policies.

# **Emergency Notification Numbers Eddy, County**

Organization or Agency	Phone Number
New Mexico State Police	(505) 885-3137
Eddy County Sheriff's Department	(505) 887-7551
Emergency Medical Service	
(Ambulance)	911
Eddy County Emergency Management	(505) 887-9511
State Emergency Response Center (SERC) Max Johnson (Chairman)	(505) 476-9620
Carlsbad Fire Department	911 or (505) 885-3125
Oil Conservation Division (District II)	(505) 748-1283
City of Carlsbad, New Mexico	(505) 887-1191
National Response Center (NRC)	(800) 424-8802
Chemtrec	(800) 424-9300
Midland Safety & Health	(432) 520-3838
Krisha Marker (MM Safety Inc.)	(432) 425-8262

## Mesa Arriba #3

Carlsbad Eddy County Contacts:

**Eddy County Offices** 

County Offices 101 Greene Street 505-887-9511

County Manager: Steve Massey

Commissioner: Lucky Briggs Cell: 505-706-1425 Emergency Coordinator: Joel Arwine Cell: 505-361-3404

\*\*\*\*\*\*Please contact Joel on any emergency\*\*\*\*\*\*

City Of Carlsbad, New Mexico Offices:

City of Carlsbad 101 N. Halaqueno Street 505-887-1191
Mayor Bob Forrest 505-887-1191
Harry Burgess / City Administrator 505-887-1191

Cell: 505-200-6360

City Emergency Management Coordinator:

**Liz Baggs** Office: 505-887-1191

Home: 505-885-6564 Cell: 505-361-0860

**Carlsbad Youth Sports Complex:** 

City Administrator Office: 505-887-1191

Access to Complex:

Public Works Director / Luis Camero Home: 505-885-8624

Cell: 505-706-2270

Neighboring Residents to Mesa Arriba #3

Roger Armstrong 3514 W. Lea Street Contact: 505-887-1937

Ben Jenkins 4023 W. Lea Street Contact: 505-887-2755

# EMERGENCY PROCEDURES FOR UNCONTROLLABLE RELEASE OF HYDROGEN SULFIDE GAS (H<sub>2</sub>S)

- 1. Secure and don self-contained breathing apparatus.
- 2. Remove all personnel to up-wind and up-hill "safe breathing" zone.
- 3. Contact all concerned employees and immediate supervisor for instructions.
- 4. Take steps to protect and/or remove the general public to an upwind area away from the source of H<sub>2</sub>S.
- 5. Deny entry to unnecessary personnel.
- 6. Notify necessary public safety personnel:
  - a. State Police if on or near a state road
  - b. Sheriff's Department if on or near a county road

(For assistance in the evacuation of the general public and to help maintain roadblocks)

- 7. Contact the Oil Conservation Division. (OCD)
- 8. While attempting to control the release, maintain tight security and safety procedures
- 9. Use the "Buddy System" when entering any hazardous area.

The responsibility of this plan is with the <u>J. Cleo Thompson</u> supervisor(s) who shall be in complete command during the emergency.

# IGNITION PROCEDURES FOR UNCONTROLLABLE WELL CONDITIONS

The decision to ignite the well is the decision of the company supervisor(s). This decision should be made only as a last resort and in a situation where it is determined that:

- Human life and/or property are endangered
- There is no hope of controlling the blowout under the prevailing conditions at the well.

### **INSTRUCTIONS FOR IGNITING THE RELEASE**

- 1. Two personnel are required for the ignition operation. They **must** wear positive pressure self-contained breathing apparatus and a D-ring style full body safety harness with a non-flammable safety rope attached. (**Must be an OSHA approved body harness**)
- 2. One (safety) person will test the atmosphere for explosive gases with an approved Triple-range (H<sub>2</sub>S, O<sub>2</sub>, LFL) monitor. The other person (company supervisor) is responsible for igniting the well.
- 3. Primary method of ignition shall be with the 25mm flare gun with range of approximately 500 feet.
- 4. Ignite up-wind and do not approach any closer than is warranted.
- 5. Select a safe ignition site, which offers ultimate egress.
- 6. Before activating flare gun, check for presence of combustible gas.
- 7. After ignition, continue emergency action and procedure as before.
- 8. All unassigned personnel will limit their actions to those directed by the company supervisor.

After the well is ignited, burning  $H_2S$  will produce  $SO_2$ , which is also highly toxic. **Do not assume the area is safe after the well is ignited**.

A NO SMOKING POLICY shall be strictly enforced on location at all times.



#### EMERGENCY EQUIPMENT REQUIREMENTS

#### 1. Respiratory Protection

- Rescue Units (SCBA's): One (1) unit shall be placed at each briefing area and 2 shall be stored in the safety trailer.
- Work/Escape Units: Four (4) units shall be stored on the rig floor connected to the safety trailer with sufficient hose to allow workers to adequately perform duties with minimal restriction.
- Emergency Escape Units: Four (4) units shall be stored in the top dog house for emergency evacuation purposes.

#### 2. Signs and Flags

One (1) Condition Sign shall be placed at location entrance with the following language:

# DANGER H<sub>2</sub>S



Condition Flags shall be displayed at the sign in one of the following designations:

Green / normal conditions Yellow / potential danger Red/ danger, H<sub>2</sub>S Present

- 3. **Briefing Area:** Two (2) briefing areas, designated by signs, shall be located perpendicular to each other and be easily visible and readily accessible.
- **4. Windsocks:** Two (2) windsocks shall be strategically placed where they are easily visible from all points.
- 5. Hydrogen Sulfide Detectors and Alarms:

- One (1) stationary H<sub>2</sub>S monitor with three sensors shall be located on the rig in the top dog house. The H<sub>2</sub>S monitor shall be calibrated to alarm at 10PPM for the low alarm (visual alarm) and 15 PPM for the high alarm (audible alarm). Calibrations shall be checked every 30 days or as needed. The sensors shall be located as follows:
- #1 Rig floor
- #2 Bell Nipple
- #3 Flow line or where the well bore fluid is discharged
- A gas sampling pump, with detector tubes capable of measuring H<sub>2</sub>S gas, shall be located in the safety trailer.

#### 6. Additional Rescue Equipment

- One Hundred Feet (100') of 5/8" OSHA approved rope.
- Two (2) OSHA approved full body harness
- One (1) Stretcher

#### 7. Fire Extinguishers:

• One (1) 20#, Class ABC fire extinguisher shall be located in the safety trailer.

#### 8. Communication:

Cellular Phones/Mobile Phones or two- way radios shall be available via the vehicles on location and on the rig floor.

# TOXIC EFFECTS OF HYDROGEN SULFIDE

Hydrogen sulfide  $(H_2S)$  is extremely toxic. The acceptable ceiling concentration for an eight (8) hour exposure is 10 PPM, which is .001% by volume. Hydrogen sulfide  $(H_2S)$  is colorless. Hydrogen Sulfide  $(H_2S)$  is heavier than air; the specific gravity is equal to 1.19, which is 20% heavier than ambient temp air, which is 1.00. Hydrogen sulfide  $(H_2S)$  can form an explosive mixture with air between 4.3% and 46.0%. By volume hydrogen sulfide  $(H_2S)$  is as toxic as hydrogen cyanide and is between 5-6 times more toxic than carbon monoxide.

#### TOXICITY OF VARIOUS GASES

Common Name	Chemical Formula	Specific Gravity	Threshold Limit <sup>1</sup>	Hazardous Limit <sup>2</sup>	Lethal Concentration <sup>3</sup>
Hydrogen					
Cyanide	HCN	0.94	10 PPM	150 PPM/Hr	300 PPM
Hydrogen Sulfide	H <sub>2</sub> S	1.189	10 PPM <sup>4</sup> 15 PPM <sup>5</sup>	100 PPM/Hr	600 PPM
Sulfur					
Dioxide	SO <sub>2</sub>	2.21	2 PPM	N/A	100 PPM
Chlorine	CL <sub>2</sub>	2.45	1 PPM	4 PPM/Hr	1000 PPM
Carbon Monoxide	СО	0.97	50 PPM	400 PPM/Hr	1000 PPM
Carbon					
Dioxide	CO <sub>2</sub>	1.52	5000 PPM	5%	10%
Methane	CH <sub>4</sub>	0.55	90,000 PPM	Combustible @ 5%	N/A

- (1) Threshold limit Concentration at which it is believed that all workers may be repeatedly exposed, day after day with out adverse effects also referred to as Time Weighted Average (TWA).
- (2) Hazardous limit Concentration that may cause death
- (3) Lethal concentration Concentrations that will cause death with short-term exposure
- (4) Threshold limit 10PPM NIOSH guide to chemical hazards
- (5) Short-term threshold limit Concentration higher than Threshold limit with limits placed on time one can be exposed. Exposure time is limited to 15 minutes followed by one (1) hour in fresh air. This cycle can be repeated for (4) times during a normal eight (8) hour workday.

# PHYSICAL EFFECTS OF HYDROGEN SULFIDE (H2S)

(Concentrations are calculated @ 15.00 psia and 60 degrees F.)

Concentrations		Physical Effects
0.001%	10 PPM	Obvious & unpleasant odor. Safe for an eight (8) hour exposure
0.005%	50 PPM	Can cause some flu-like symptoms and can cause pneumonia.
0.01%	100 PPM	IDLH <sup>1</sup> . Kills the sense of smell in 3 to 15 minutes. May irritate eyes and throat.
0.02%	200 PPM	Kills the sense of smell rapidly. Severely irritates eyes and throat. Severe flu-like symptoms after 4 or more hours may cause lung damage and/or death.
0.06%	600 PPM	Loss of consciousness quickly, death will result if not rescued promptly.

(1) Immediately dangerous to life or health

# TOXICITY OF HYDROGEN SULFIDE

	<del></del>							
וייוסס (ייססס שפייוי)	0.060 (600 ppm) 0.070 (700 ppm) 0.080 (800 ppm) 0.100 (1000 ppm)	0.050 (500 ppm)	0-035 (350 ppm)	0-025 (250 ppm) 0.035 (350 ppm)	0.015 (150 ppm) 0.020 (200 ppm)	0.010 (100 ppm) 0.015 (150 ppm)	0.005 (50 ppm) 0.010 (100 ppm)	H <sub>2</sub> S Per Cent (PPM)
	Collapse * Unconsciousness Death *	Coughing Collapse & Unconsciousness		Irritation of Eyes: Loss of Sense of Smell				0 - 2 Minutes
	Collapse * Unconsciousness Death *	Respiratory Disturbances; Irritation of Eyes; Collapse	Irritation of Eyes; Loss of Sense of Smell	Irritation of Eyes	Loss of Sense of Smell	Coughing: Irritation of Eyes; Loss of Sense of Smell		0 - 15 Minutes
		Serious Eye Irritation; Palpitation of Heart; Few Cases of Death*	Difficult Respiration Coughing; Irritation of Eyes	Painful Secretion of Tears; Weariness	Throat & Eye Irritation	Disturbed Respiration; Pain in Eyes; Sleepiness		15 - 30 Minutes
		Severe Pain in Eyes and Head Dizziness; Trembling of Extremities; Great Weakness & Death *	Increased Irritation of Eyes & Nasal Tract; Dull Pain Head; Weariness; Light & Shy	Light & Shy: Nasal Catarrh; Pain in Eyes; Difficult Breathing	Throat & Eye Irritation	Throat	Mild Conjunctivitis; Respiratory Tract Irritation	30 Minutes to 1 Hour
			Dizziness Weakness; Increased Irritation; Death	Hemorrhage & Death	Difficult Breathing; Blurred Vision; Light & Shy	Salivation & Mucous Discharge: Sharp Pain in Eyes; Coughing		1 - 4 Hours
			Death *		Serious Irritating Effects	Increased Symptoms*		4-8 Hours
					Hemorrhage & Death *	Hemorrhage & Death *		8 - 48 Hours

<sup>\*</sup> Data secured from experiments of dogs, which have susceptibility similar to men/women. \*\*PPM parts per million

# THE USE OF SELF-CONTAINED BREATHING AIR EQUIPMENT

#### SCBA should be worn when:

- Working near the top or on top of any tank.
- Disconnecting any line where H<sub>2</sub>S can reasonably be expected.
- Sampling air in the area to determine if toxic concentrations of H<sub>2</sub>S exist.
- Working in areas where over 10 PPM of H<sub>2</sub>S has been detected.
- At any time there is a doubt as to the H<sub>2</sub>S level in the area to be entered.

Air quality testing shall be continuous throughout the entire operation if a container is breeched or in a hazardous location.

All personnel shall be trained in the use of SCBA prior to working in a potentially hazardous location.

Facial hair and standard eyeglasses are not allowed with SCBA use.

Contact lenses are never allowed with the use of SCBA.

The SCBA shall be inspected monthly.

After each use, the SCBA shall be cleaned, disinfected, serviced, inspected and refilled to proper specifications.

## <u>RESCUE & FIRST AID FOR VICTIMS OF HYDROGEN</u> SULFIDE (H2S) POISONING

Do not panic!

Remain calm and think with your head and not your heart.

Don breathing apparatus.

Protect yourself, then remove victim to fresh air as quickly as possible. When evacuating: walk not run, upwind and uphill from the source or crosswind to achieve upwind.


Notify emergency response personnel

Provide artificial respiration and /or CPR, as necessary.

Remove all contaminated clothing to avoid further exposure.

A minimum of two (2) personnel on location shall be trained in CPR and First Aid.

Map of Mesa Arriba #3

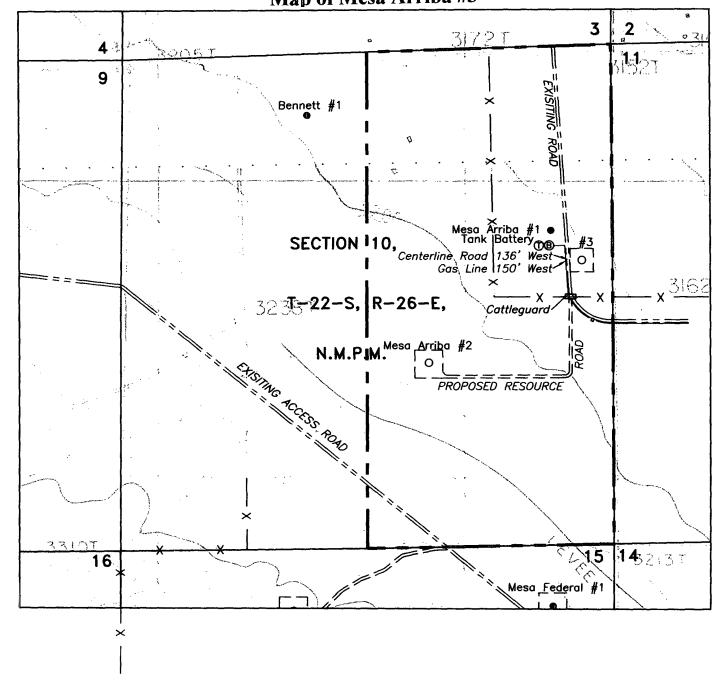

# LEGEND OF SYMBOLS

= Access Road == Resource Road on Lease ==== Resource Road on State Land == Resource Road on Private Land ==== Resource Road on Federal Land ==== Proposed Resource Road

= Staked Well Location

= Found 1" Iron Pipe with Brass Cap = Found 2" or 3" Iron Pipe with Brass Cap

== Unit or Lease Boundary

#### EXHIBIT "A" ACCESS ROAD MAP

J. Cleo Thompson & James Cleo Thompson, Jr., L.P.

MESA ARRIBA NO. 3 Located 2310' FNL & 330' FEL, Section 10, T-22-S, R-26-E, NMPM, Eddy County, NM

Drawn by: Gene M. Rodriguez	Scale: 1" = 1000'
Date: May 30, 2006	Jim Stevens