District I
1625 N. French Dr., Hobbs, NM 88240.
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Azicc, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505 Form C-144 June 1, 2004

For drilling and production facilities, submit to appropriate NMOCD District Office.
For downstream facilities, submit to Santa Fe office


Ol CI Pifor Below-Grade Tank Registration or Closure
Is pit or below-grade tank covered by a "general plan"? Yes No

Closure of pit or below grade tank covered by a "general plan"?

encountered: No Yes If yes, show depth below ground surface (5) Attach soil sample results and a diagram of sample locations and excavations. Additional Comments: Closure work plan for drilling pit. An encapsulation trench we excavated and emplaced into the encapsulation trench using a mixture of three to one track hoe and water added if needed. After completion of solidifying pit material in cusing a 20 mil synthetic liner placed over the pit contents with a minimum of a 3' or soil or like material. A one call and 48 hour notification to OCD will be made before See attached sampling and closure data I hereby certify that the information above is true and complete to the best of my kno constructed or closed according to NMOCD guidelines , a general permit	ft. and attach sample results. Fill be constructed and lined with 12 mil synthetic liner next to e pit material and Class H bulk cement or CKD. The emulsion cement and pit contents have set in place for a minimum of 24 wer lap of the underlying trench areas. The trench will then be e pit closure action begins. Beginning pit closure date: N/A. Experience and belief. I further certify that the above-describer of the properties of the content of the cont	existing drilling pit. The drilling pit contents will be on of pit material and cement will be mixed using a hours, the encapsulation trench will then be capped backfilled to grade using a minimum of 3' of clean ending pit closure date: N/A			
encountered: No Yes It'yes, show depth below ground surface (5) Attach soil sample results and a diagram of sample locations and excavations. Additional Comments: Closure work plan for drilling pit. An encapsulation trench we excavated and emplaced into the encapsulation trench using a mixture of three to one track hoe and water added if needed. After completion of solidifying pit material in coursing a 20 mil synthetic liner placed over the pit contents with a minimum of a 3° or soil or like material. A one call and 48 hour notification to OCD will be made before See attached sampling and closure data I hereby certify that the information above is true and complete to the best of my known.	ft. and attach sample results. Fill be constructed and lined with 12 mil synthetic liner next to e pit material and Class H bulk cement or CKD. The emulsion cement and pit contents have set in place for a minimum of 24 wer lap of the underlying trench areas. The trench will then be e pit closure action begins. Beginning pit closure date: N/A. Experience and belief. I further certify that the above-describer of the properties of the content of the cont	existing drilling pit. The drilling pit contents will be on of pit material and cement will be mixed using a hours, the encapsulation trench will then be capped backfilled to grade using a minimum of 3° of clean ending pit closure date: N/A			
encountered: No Yes It'yes, show depth below ground surface (5) Attach soil sample results and a diagram of sample locations and excavations. Additional Comments: Closure work plan for drilling pit. An encapsulation trench we excavated and emplaced into the encapsulation trench using a mixture of three to one track hoe and water added if needed. After completion of solidifying pit material in cusing a 20 mil synthetic liner placed over the pit contents with a minimum of a 3° over soil or like material. A one call and 48 hour notification to OCD will be made before	At. and attach sample results. Fill be constructed and lined with 12 mil synthetic liner next to the pit material and Class H bulk cement or CKD. The emulsion the contents have set in place for a minimum of 24 over lap of the underlying trench areas. The trench will then be	existing drilling pit. The drilling pit contents will be on of pit material and cement will be mixed using a hours, the encapsulation trench will then be capped backfilled to grade using a minimum of 3' of clean			
encountered: No Yes It'yes, show depth below ground surface (5) Attach soil sample results and a diagram of sample locations and excavations. Additional Comments: Closure work plan for drilling pit. An encapsulation trench we excavated and emplaced into the encapsulation trench using a mixture of three to one track hoe and water added if needed. After completion of solidifying pit material in cusing a 20 mil synthetic liner placed over the pit contents with a minimum of a 3' or	At. and attach sample results. Fill be constructed and lined with 12 mil synthetic liner next to the pit material and Class H bulk cement or CKD. The emulsion the contents have set in place for a minimum of 24 over lap of the underlying trench areas. The trench will then be	existing drilling pit. The drilling pit contents will be on of pit material and cement will be mixed using a hours, the encapsulation trench will then be capped backfilled to grade using a minimum of 3° of clean			
encountered: No Yes It'yes, show depth below ground surface (5) Attach soil sample results and a diagram of sample locations and excavations. Additional Comments: Closure work plan for drilling pit. An encapsulation trench we excavated and emplaced into the encapsulation trench using a mixture of three to one track hoe and water added if needed. After completion of solidifying pit material in cusing a 20 mil synthetic liner placed over the pit contents with a minimum of a 3' or	At. and attach sample results. Fill be constructed and lined with 12 mil synthetic liner next to the pit material and Class H bulk cement or CKD. The emulsion the contents have set in place for a minimum of 24 over lap of the underlying trench areas. The trench will then be	existing drilling pit. The drilling pit contents will be on of pit material and cement will be mixed using a hours, the encapsulation trench will then be capped backfilled to grade using a minimum of 3' of clean			
encountered: No Yes If yes, show depth below ground surface (5) Attach soil sample results and a diagram of sample locations and excavations. Additional Comments: Closure work plan for drilling pit. An encapsulation trench we excavated and emplaced into the encapsulation trench using a mixture of three to one track hoe and water added if needed. After completion of solidifying pit material in completion.	ft. and attach sample results. Fill be constructed and lined with 12 mil synthetic liner next to epit material and Class H bulk cement or CKD. The emulsion cement and pit contents have set in place for a minimum of 24	existing drilling pit. The drilling pit contents will be on of pit material and cement will be mixed using a hours, the encapsulation trench will then be capped			
encountered: No Yes 1f yes, show depth below ground surface	ft. and attach sample results. ill be constructed and lined with 12 mil synthetic liner next to e pit material and Class H bulk cement or CKD. The emulsio	existing drilling pit. The drilling pit contents will be on of pit material and cement will be mixed using a			
encountered: No Yes If yes, show depth below ground surface	ft. and attach sample results.				
encountered: No Yes If yes, show depth below ground surface	ft. and attach sample results.				
encountered: No 🔲 Yes 🔲 If yes, show depth below ground surface		ation start date and end date. (4) Groundwater			
· 		ation start date and end date. (4) Groundwater			
If this is a pit closure: (1) Attach a diagram of the facility showing the pit's relationship	hip to other equipment and tanks. (2) Indicate disposal location	on: (check the onsite box if you are burying in place)			
	Ranking Score (Total Points)	30 points			
	Panking Score (Total Paints)	3A polate			
canals, ditches, and perennial and ephemeral watercourses.)	1000 feet or more	(0 points)			
Distance to surface water: (horizontal distance to all wetlands, playas, irrigation	Less than 200 feet 200 feet or more, but less than 1000 feet	(20 points) (10 points) XXXX			
source, or less than 1000 feet from all other water sources.)					
Wellhead protection area: (Less than 200 feet from a private domestic water	No	(0 points) XXXX			
	Yes	(20 points)			
elevation of ground water.)	50 feet or more, but less than 100 feet 100 feet or more	(10 points) (0 points)			
Depth to ground water (vertical distance from bottom of pit to seasonal high water	Less than 50 feet	(20 points) XXXX			
Pit Volume <u>20,000 bbl</u>					
Liner type: Synthetic 🖾 Thickness 12 mil Clay 🗆					
Work over ☐ Emergency ☐ Lincd ☑ Unlined ☐	Construction material: Double-walled, with leak detection? Yes If not, explai				
Type: Drilling M Production Disposal D	Volume:bbl Type of fluid:				
Pit	Below-grade tank	S. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1.			
Surface Owner, Federal State Private Indian					
County: Eddy Latitude: 32,16468 Longitude: 104.1500	43 NAD: 1927 ⊠ 1983 🔲	OCD ARIESIA			
Facility or well name; Cohiba State Unit #1 _API #: 30-015-33999_U/L or Qtr/Qtr_	RECEIVED				
Operator: Yates Petroleum Corporation Telephone: 505-748-4500 e-mail address: mikes@ypenm.com Address: 105 South 4th Street Artesia, N.M. 88210					
-		RECEIVED OCD - ARTESIA			

Accepted for record - NMOCD

PIT CLOSURE FINAL DATE 12/4/2006

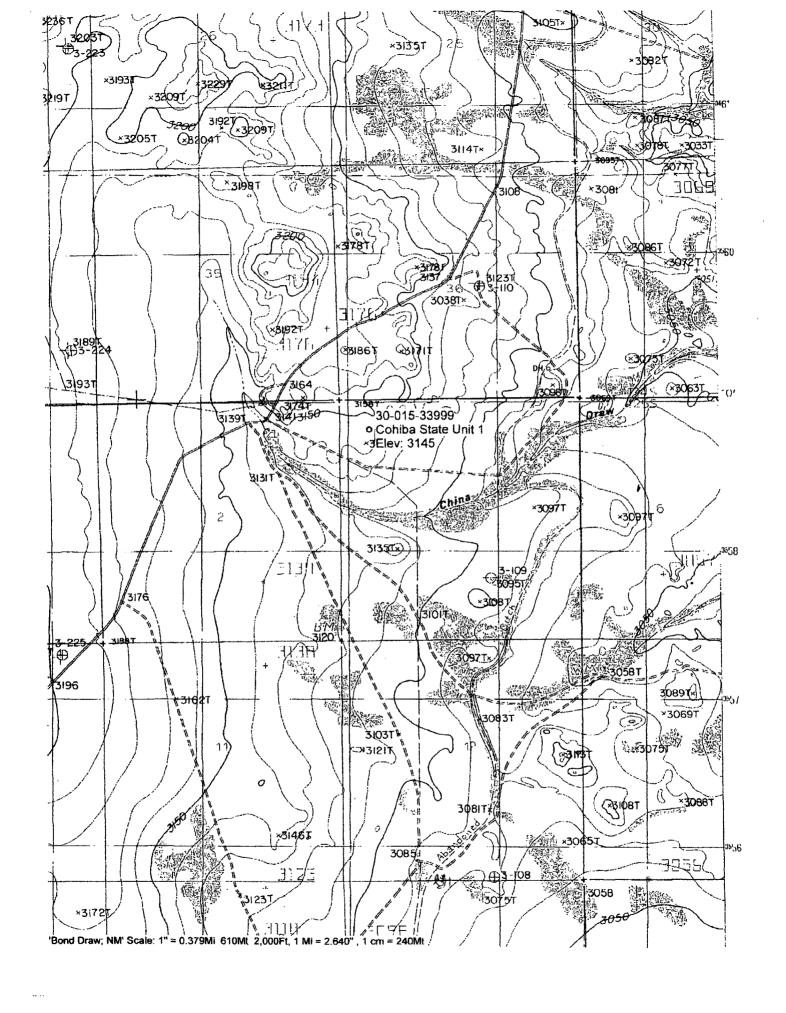

New Mexico Office of the State Engineer POD Reports and Downloads COHIBA STATE UNIT #						
Township: 25S	Range: 28E	Sections:				
NAD27 X:	Y:	Zone:		Search Radius:	- · · ·	
County:	Basin:			Number:	Suffix:	
Owner Name: (First)	_ (I	_ast)		○ Non-Domestic	ODomestic	
POD/S	urface Data Repo	ort /		o Water Report)	
	Clear Form	[WATERS	Menu	Help		

AVERAGE DEPTH OF WATER REPORT 10/04/2006

							., .,	(Depth	Water in	Feet)
Bsn	Tws	Rng	Sec,	Zone	x	Y	Wells	Min	Max	Avg
C.	25\$. 28E	04 :				1	35	35	35
С	25S	28E	20				1	96	96	96
С	25S	28E	28				1	90	90	90
С	25\$	28E	36				1	40	40	40

Record Count: 4