



Scientific Drilling International, Inc.

2034 Trade Drive • Midland, Texas 79703

P. O. Box 9699 • Midland, Texas 79708

Tel: 432-563-1339 • Fax: 432-697-0324

15 May 2006

**Bill Dougherty
Devon Energy
20 N. Broadway, Suite #1500
Oklahoma City, OK 73102-8260**

Subject: North Pure Gold 8 Fed #10


Mr. Dougherty,

Enclosed are two notarized surveys for the above referenced well, for your records and/or New Mexico OCD. If you have any questions, please let me know.

Regards,

Becky Wharton

Enclosures

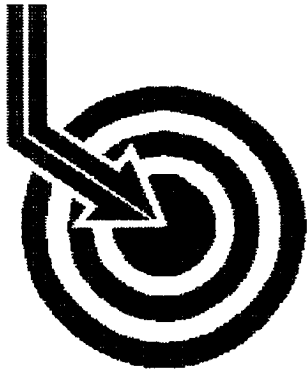

Scientific Drilling

DEVON ENERGY

Field: Los Medanos
Site: Eddy County, NM
Well: North Pure Gold 8 Fed #10
Wellpath: VH - Job #32K0306267
Survey: 03/31/06


This survey is correct to the best of my knowledge
and is supported by actual field data.

.....*Deharto*..... Company Representative

Notorized this date 15th of May, 2006.

Deborah Sue Bynum

Notary Signature
County of Midland
State of Texas

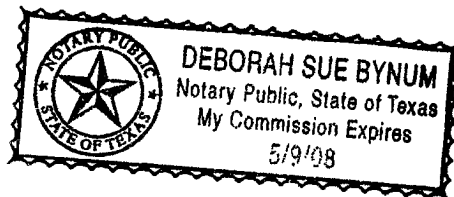



Scientific
Drilling

Scientific Drilling International Survey Report

Company: DEVON ENERGY
Field: Los Medanos
Site: Eddy County, NM
Well: North Pure old 8 Fed #10
Wellpath: VH - Job #32K0306267

Date: 05/14/2006 Time: 20:40:25 Page: 1
Co-ordinate(NE) Reference: Site: Eddy County, NM, Grid North
Vertical (TVD) Reference: SITE 0.0
Section (VS) Reference: Well (0.00N,0.00E,314.98Azi)
Survey Calculation Method: Minimum Curvature Db: Sybase

Survey: 03/31/06 Start Date: 03/31/2006
KSRG 0'-3960'
Company: Scientific Drilling Internatio Engineer: Gonzales w/Rotary
Tool: Keeper;Keeper Gyro Tied-to: From Surface

Survey


MD ft	Incl deg	Azim deg	TVD ft	VS ft	N/S ft	E/W ft	DLS deg/100ft	ClsD ft	ClsA deg
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.07	57.76	100.00	-0.01	0.03	0.05	0.07	0.06	57.76
200.00	0.07	89.21	200.00	-0.07	0.07	0.16	0.04	0.18	68.12
300.00	0.12	173.62	300.00	-0.19	-0.04	0.24	0.13	0.24	98.92
400.00	0.36	200.99	400.00	-0.40	-0.43	0.14	0.26	0.46	162.59
500.00	0.57	202.47	500.00	-0.72	-1.19	-0.17	0.21	1.20	187.98
600.00	0.62	212.53	599.99	-1.03	-2.10	-0.65	0.12	2.20	197.11
700.00	0.69	215.08	699.98	-1.25	-3.05	-1.28	0.08	3.31	202.82
800.00	0.96	210.64	799.97	-1.56	-4.27	-2.06	0.28	4.74	205.75
900.00	0.92	215.97	899.96	-1.89	-5.64	-2.96	0.10	6.36	207.67
1000.00	0.88	227.61	999.95	-1.98	-6.80	-3.99	0.19	7.89	210.42
1100.00	0.98	216.55	1099.93	-2.07	-8.01	-5.07	0.21	9.48	212.34
1200.00	0.83	228.22	1199.92	-2.16	-9.18	-6.12	0.24	11.03	213.70
1300.00	0.94	217.33	1299.91	-2.23	-10.31	-7.16	0.20	12.55	214.76
1400.00	0.84	224.42	1399.90	-2.34	-11.49	-8.17	0.15	14.10	215.41
1500.00	0.96	204.17	1499.89	-2.65	-12.78	-9.02	0.34	15.64	215.24
1600.00	0.91	224.26	1599.87	-2.96	-14.11	-9.92	0.33	17.25	215.11
1700.00	0.92	215.50	1699.86	-3.10	-15.33	-10.94	0.14	18.84	215.52
1800.00	0.94	205.29	1799.85	-3.51	-16.73	-11.76	0.17	20.45	215.11
1900.00	0.79	225.39	1899.84	-3.78	-17.95	-12.60	0.34	21.93	215.06
2000.00	0.90	216.91	1999.83	-3.88	-19.06	-13.56	0.17	23.40	215.43
2100.00	0.98	205.41	2099.81	-4.28	-20.47	-14.40	0.20	25.02	215.13
2200.00	0.86	228.66	2199.80	-4.52	-21.73	-15.33	0.39	26.60	215.20
2300.00	0.93	221.58	2299.79	-4.52	-22.84	-16.43	0.13	28.13	215.74
2400.00	0.61	197.57	2399.78	-4.81	-23.95	-17.13	0.45	29.45	215.58
2500.00	0.87	231.31	2499.77	-4.97	-24.93	-17.89	0.50	30.68	215.65
2600.00	0.79	218.68	2599.76	-4.96	-25.95	-18.91	0.20	32.11	216.08
2700.00	0.64	244.10	2699.75	-4.86	-26.73	-19.84	0.35	33.29	216.59
2800.00	0.70	234.58	2799.75	-4.57	-27.33	-20.84	0.13	34.37	217.33
2900.00	0.69	223.71	2899.74	-4.48	-28.11	-21.76	0.13	35.55	217.73
3000.00	0.55	236.79	2999.73	-4.40	-28.81	-22.57	0.20	36.60	218.08
3100.00	0.58	237.05	3099.73	-4.19	-29.35	-23.40	0.03	37.54	218.56
3200.00	0.57	224.96	3199.72	-4.09	-29.98	-24.18	0.12	38.51	218.89
3300.00	0.56	215.69	3299.72	-4.17	-30.73	-24.81	0.09	39.50	218.92
3400.00	0.67	204.17	3399.71	-4.45	-31.66	-25.34	0.16	40.55	218.67
3500.00	0.63	187.36	3499.71	-5.00	-32.74	-25.65	0.19	41.59	218.08
3600.00	0.74	182.85	3599.70	-5.77	-33.93	-25.75	0.12	42.59	217.20
3700.00	0.85	168.50	3699.69	-6.82	-35.30	-25.63	0.23	43.62	215.99
3800.00	1.03	163.78	3799.68	-8.22	-36.89	-25.24	0.20	44.69	214.38
3900.00	0.85	155.39	3899.66	-9.71	-38.43	-24.68	0.23	45.67	212.71
3960.00	1.31	148.82	3959.65	-10.79	-39.42	-24.14	0.79	46.22	211.48



**Scientific
Drilling**

Field: Los Medanos
Site: Eddy County, NM
Well: North Pure Gold 8 Fed #10
Wellpath: VH - Job #32K0306267
Survey: 03/31/06


G/T/M



Azimuths to Grid North
True North: 0.00°
Magnetic North: 0.00°

Magnetic Field
Strength: 0nT
Dip Angle: 0.00°
Date: 05/14/2006
Model: igrf2000

South(-)/North(+) [5ft/in]

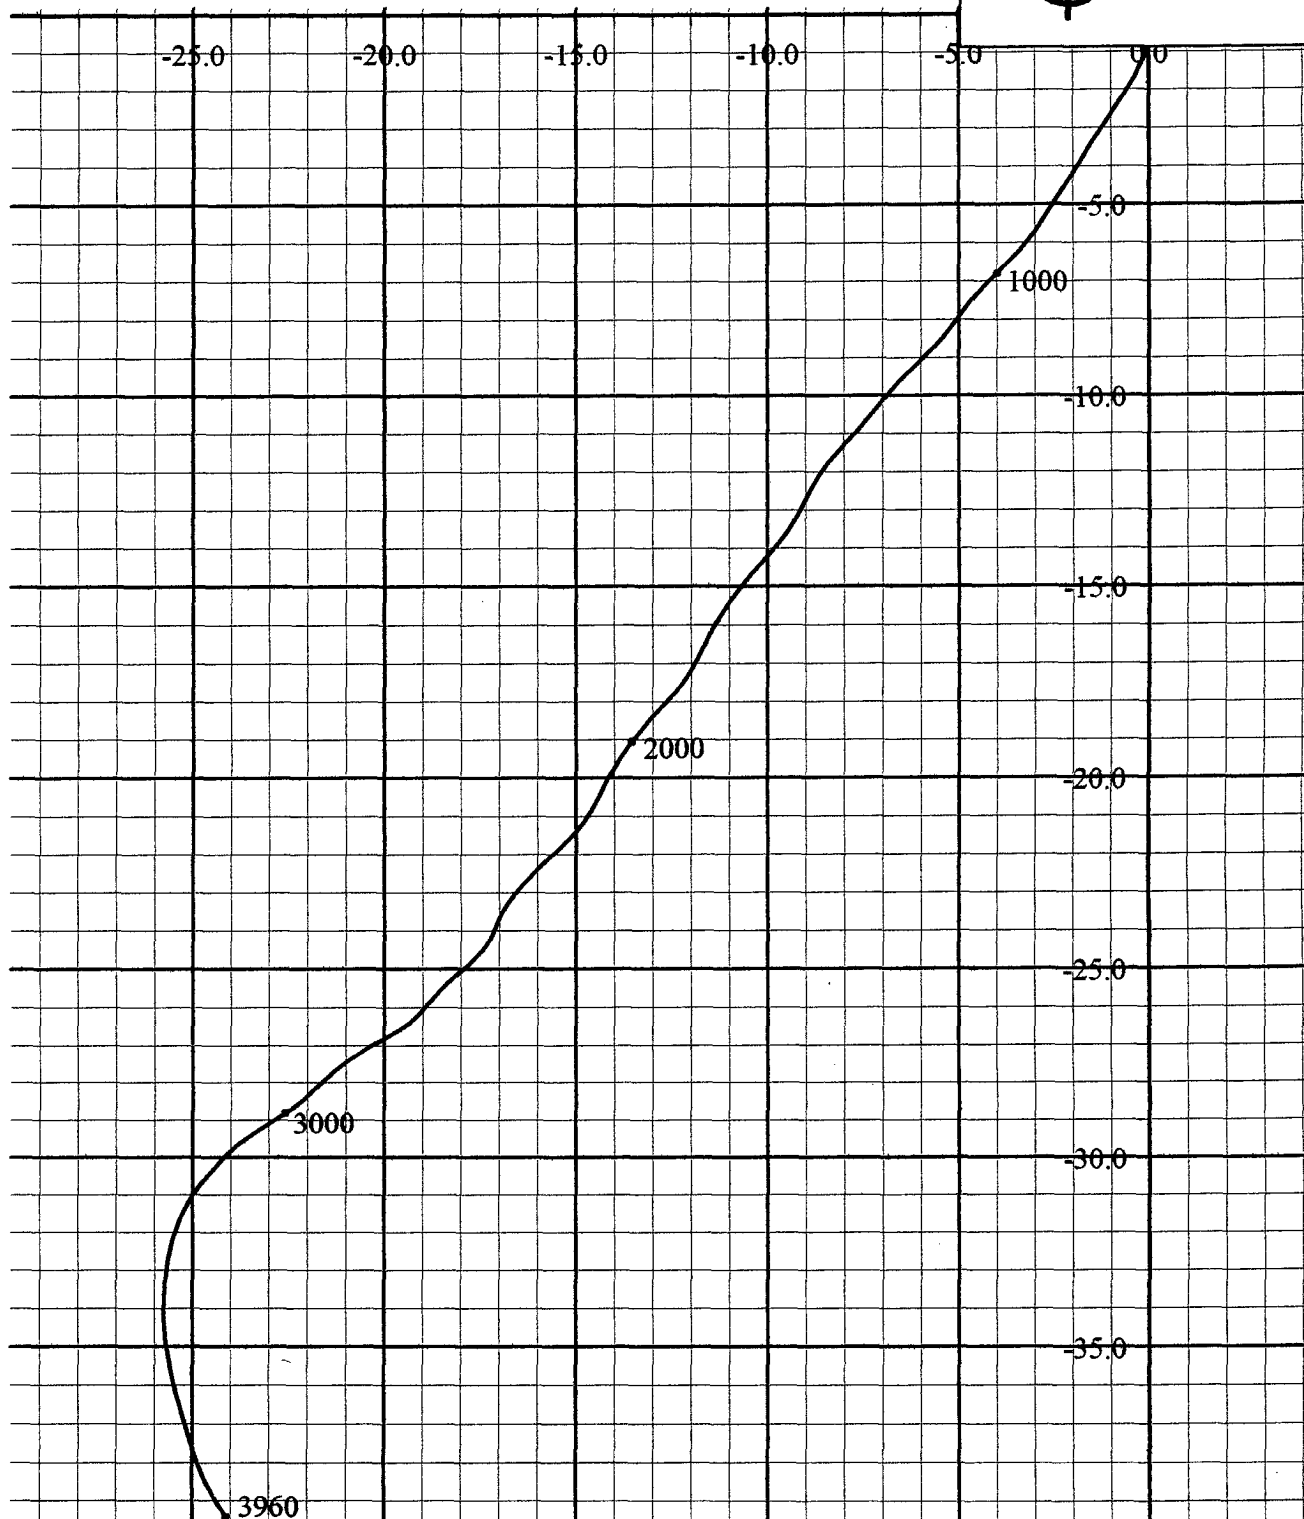

West(-)/East(+) [5ft/in]



INTEQ

2105 market Street Midland, TX 79703 Ph. (432)694-9517 Fax. (432)694-5648

Survey Report

Devon Energy

North Pure Gold 8 Fed 10

Eddy County, NM

ST01 MWD

**Prepared By Oscar Gomez
Tuesday, May 30, 2006**

DEVON ENERGY
North Pure Gold 8 Fed 10, slot #1
, Eddy County New Mexico

SURVEY LISTING Page 1
Your ref : ST01 MWD
Last revised : 30-May-2006

Measured Depth	Inclin. Degrees	Azimuth Degrees	True Vert Depth	R E C T A N G U L A R C O O R D I N A T E S		Dogleg Deg/100ft	Vert Sect
0.00	0.00	0.00	0.00	0.00 N	0.00 E	0.00	0.00
100.00	0.07	57.76	100.00	0.03 N	0.05 E	0.07	-0.01
200.00	0.07	89.21	200.00	0.07 N	0.16 E	0.04	-0.07
300.00	0.12	173.62	300.00	0.04 S	0.24 E	0.13	-0.19
400.00	0.36	200.99	400.00	0.43 S	0.14 E	0.26	-0.40
500.00	0.57	202.47	500.00	1.19 S	0.17 W	0.21	-0.72
600.00	0.62	212.53	599.99	2.10 S	0.65 W	0.12	-1.03
700.00	0.69	215.08	699.98	3.05 S	1.28 W	0.08	-1.25
800.00	0.96	210.64	799.97	4.27 S	2.06 W	0.28	-1.56
900.00	0.92	215.97	899.96	5.64 S	2.96 W	0.10	-1.89
1000.00	0.88	227.61	999.95	6.80 S	3.99 W	0.19	-1.98
1100.00	0.98	216.55	1099.93	8.01 S	5.07 W	0.21	-2.07
1200.00	0.83	228.22	1199.92	9.18 S	6.12 W	0.24	-2.16
1300.00	0.94	217.33	1299.91	10.31 S	7.16 W	0.20	-2.23
1400.00	0.84	224.42	1399.90	11.49 S	8.17 W	0.15	-2.34
1500.00	0.96	204.17	1499.89	12.78 S	9.02 W	0.34	-2.65
1600.00	0.91	224.26	1599.87	14.11 S	9.92 W	0.33	-2.96
1700.00	0.92	215.50	1699.86	15.33 S	10.94 W	0.14	-3.10
1800.00	0.94	205.29	1799.85	16.73 S	11.76 W	0.17	-3.51
1900.00	0.79	225.39	1899.84	17.95 S	12.60 W	0.34	-3.78
2000.00	0.90	216.91	1999.83	19.06 S	13.56 W	0.17	-3.88
2100.00	0.98	205.41	2099.81	20.47 S	14.40 W	0.20	-4.28
2200.00	0.86	228.66	2199.80	21.73 S	15.33 W	0.39	-4.52
2300.00	0.93	221.58	2299.79	22.84 S	16.43 W	0.13	-4.52
2400.00	0.61	197.57	2399.78	23.95 S	17.13 W	0.45	-4.81
2500.00	0.87	231.31	2499.77	24.93 S	17.89 W	0.50	-4.97
2600.00	0.79	218.68	2599.76	25.95 S	18.91 W	0.20	-4.96
2700.00	0.64	244.10	2699.75	26.73 S	19.84 W	0.35	-4.86
2800.00	0.70	234.58	2799.75	27.33 S	20.84 W	0.13	-4.57
2900.00	0.69	223.71	2899.74	28.11 S	21.76 W	0.13	-4.48
3000.00	0.55	236.79	2999.73	28.81 S	22.57 W	0.20	-4.40
3100.00	0.58	237.05	3099.73	29.35 S	23.40 W	0.03	-4.19
3200.00	0.57	224.96	3199.72	29.98 S	24.18 W	0.12	-4.09
3300.00	0.56	215.69	3299.72	30.73 S	24.81 W	0.09	-4.17
3400.00	0.67	204.17	3399.71	31.66 S	25.34 W	0.16	-4.45
3500.00	0.63	187.36	3499.71	32.74 S	25.65 W	0.19	-5.00
3600.00	0.74	182.85	3599.70	33.93 S	25.75 W	0.12	-5.77
3700.00	0.85	168.50	3699.69	35.30 S	25.63 W	0.23	-6.82
3800.00	1.03	163.78	3799.68	36.89 S	25.24 W	0.20	-8.22
3900.00	0.85	155.39	3899.66	38.43 S	24.68 W	0.23	-9.71
3960.00	1.31	148.82	3959.65	39.42 S	24.14 W	0.79	-10.79
4084.00	0.88	161.60	4083.63	41.53 S	23.10 W	0.40	-13.02
4113.00	0.70	171.10	4112.63	41.92 S	23.00 W	0.77	-13.36
4145.00	0.70	219.60	4144.62	42.26 S	23.10 W	1.80	-13.54
4176.00	1.30	265.00	4175.62	42.44 S	23.57 W	3.06	-13.33
4207.00	2.30	282.90	4206.60	42.33 S	24.53 W	3.66	-12.57
4239.00	3.30	294.50	4238.56	41.81 S	25.99 W	3.58	-11.17
4270.00	4.40	298.80	4269.49	40.86 S	27.84 W	3.67	-9.19
4302.00	5.70	301.90	4301.37	39.43 S	30.27 W	4.15	-6.46
4334.00	7.00	301.90	4333.17	37.56 S	33.27 W	4.06	-3.02

All data is in feet unless otherwise stated.
Coordinates from structure and TVD from rotary table.
Bottom hole distance is 851.89 on azimuth 313.52 degrees from wellhead.
Vertical section is from N 0.00 E 0.00 on azimuth 314.98 degrees.
Calculation uses the minimum curvature method.
Presented by Baker Hughes INTEQ

DEVON ENERGY
North Pure Gold 8 Fed 10, slot #1
, Eddy County New Mexico

SURVEY LISTING Page 2
Your ref : ST01 MWD
Last revised : 30-May-2006

Measured Depth	Inclin. Degrees	Azimuth Degrees	True Vert Depth	R E C T A N G U L A R C O O R D I N A T E S		Dogleg Deg/100ft	Vert Sect
4365.00	8.20	302.60	4363.90	35.37 S	36.74 W	3.88	0.98
4397.00	9.60	304.40	4395.51	32.64 S	40.86 W	4.46	5.84
4428.00	10.80	306.50	4426.02	29.45 S	45.33 W	4.05	11.25
4458.00	12.00	307.90	4455.43	25.86 S	50.05 W	4.10	17.13
4490.00	12.70	310.40	4486.69	21.54 S	55.36 W	2.75	23.93
4522.00	13.10	311.10	4517.88	16.87 S	60.77 W	1.34	31.06
4553.00	13.80	312.80	4548.03	12.05 S	66.13 W	2.59	38.26
4584.00	13.90	313.50	4578.13	6.98 S	71.54 W	0.63	45.67
4615.00	14.10	313.90	4608.21	1.79 S	76.96 W	0.72	53.17
4648.00	14.20	316.30	4640.21	3.92 N	82.66 W	1.80	61.24
4678.00	14.40	317.70	4669.28	9.34 N	87.71 W	1.33	68.64
4708.00	14.10	318.10	4698.36	14.82 N	92.66 W	1.05	76.02
4739.00	13.10	319.10	4728.49	20.28 N	97.48 W	3.31	83.29
4771.00	12.70	319.50	4759.68	25.70 N	102.14 W	1.28	90.42
4866.00	12.90	318.80	4852.32	41.62 N	115.91 W	0.27	111.41
4959.00	12.90	318.10	4942.97	57.16 N	129.68 W	0.17	132.13
5051.00	13.40	316.70	5032.56	72.56 N	143.85 W	0.64	153.04
5114.00	13.20	316.00	5093.87	83.05 N	153.85 W	0.41	167.53
5209.00	13.50	317.70	5186.30	99.05 N	168.85 W	0.52	189.45
5305.00	13.00	321.70	5279.75	115.81 N	183.08 W	1.09	211.37
5389.00	11.30	330.00	5361.87	130.36 N	193.05 W	2.90	228.70
5421.00	11.30	332.10	5393.25	135.84 N	196.09 W	1.29	234.73
5453.00	11.80	332.80	5424.60	141.52 N	199.05 W	1.62	240.84
5484.00	12.20	330.40	5454.93	147.19 N	202.12 W	2.06	247.01
5516.00	12.70	327.90	5486.17	153.11 N	205.66 W	2.30	253.70
5558.00	13.10	324.10	5527.11	160.88 N	210.90 W	2.23	262.90
5590.00	13.40	324.10	5558.26	166.82 N	215.20 W	0.94	270.14
5622.00	13.60	323.00	5589.38	172.83 N	219.64 W	1.02	277.53
5652.00	13.90	321.30	5618.52	178.46 N	224.02 W	1.68	284.60
5683.00	14.10	319.80	5648.60	184.25 N	228.78 W	1.34	292.07
5714.00	14.20	318.90	5678.66	189.99 N	233.72 W	0.78	299.62
5746.00	14.40	318.10	5709.66	195.91 N	238.96 W	0.88	307.51
5778.00	14.60	317.70	5740.65	201.86 N	244.33 W	0.70	315.51
5808.00	14.40	317.00	5769.69	207.38 N	249.42 W	0.89	323.02
5839.00	14.40	316.30	5799.72	212.99 N	254.71 W	0.56	330.72
5871.00	14.40	316.70	5830.71	218.76 N	260.19 W	0.31	338.68
5934.00	14.70	319.50	5891.69	230.54 N	270.75 W	1.21	354.48
5998.00	15.10	319.80	5953.54	243.08 N	281.41 W	0.64	370.88
6122.00	15.80	318.40	6073.06	268.04 N	303.04 W	0.64	403.83
6191.00	16.20	318.00	6139.38	282.22 N	315.72 W	0.60	422.81
6220.00	16.30	318.10	6167.23	288.26 N	321.14 W	0.36	430.92
6252.00	16.30	317.70	6197.94	294.92 N	327.16 W	0.35	439.89
6284.00	16.50	317.40	6228.64	301.59 N	333.26 W	0.68	448.91
6311.00	16.60	317.40	6254.52	307.25 N	338.47 W	0.37	456.60
6367.00	16.40	316.30	6308.21	318.85 N	349.34 W	0.66	472.49
6399.00	15.40	315.60	6338.99	325.15 N	355.44 W	3.18	481.26
6492.00	14.50	316.00	6428.84	342.35 N	372.16 W	0.97	505.25
6587.00	14.50	315.30	6520.81	359.36 N	388.79 W	0.18	529.03
6680.00	14.20	316.70	6610.91	375.94 N	404.80 W	0.49	552.08
6775.00	14.00	317.00	6703.05	392.82 N	420.63 W	0.22	575.21

All data is in feet unless otherwise stated.
Coordinates from structure and TVD from rotary table.
Bottom hole distance is 851.89 on azimuth 313.52 degrees from wellhead.
Vertical section is from N 0.00 E 0.00 on azimuth 314.98 degrees.
Calculation uses the minimum curvature method.
Presented by Baker Hughes INTEQ

DEVON ENERGY
North Pure Gold 8 Fed 10, slot #1
, Eddy County New Mexico

SURVEY LISTING Page 3
Your ref : ST01 MWD
Last revised : 30-May-2006

Measured Depth	Inclin. Degrees	Azimuth Degrees	True Vert Depth	R E C T A N G U L A R C O O R D I N A T E S		Dogleg Deg/100ft	Vert Sect
6837.00	13.60	317.00	6763.26	403.64 N	430.72 W	0.65	589.99
6932.00	13.70	319.50	6855.58	420.36 N	445.64 W	0.63	612.36
7026.00	14.10	320.50	6946.83	437.66 N	460.15 W	0.50	634.86
7121.00	13.70	321.60	7039.04	455.41 N	474.50 W	0.50	657.55
7215.00	14.20	319.50	7130.27	472.90 N	488.90 W	0.76	680.10
7309.00	14.90	319.10	7221.26	490.80 N	504.31 W	0.75	703.65
7404.00	14.30	319.80	7313.19	508.99 N	519.88 W	0.66	727.52
7499.00	14.10	321.20	7405.29	526.97 N	534.70 W	0.42	750.72
7594.00	14.20	321.60	7497.40	545.12 N	549.19 W	0.15	773.79
7655.00	14.10	320.90	7556.55	556.75 N	558.52 W	0.32	788.62
7731.00	13.40	318.40	7630.37	570.52 N	570.21 W	1.21	806.62
7826.00	10.20	311.80	7723.36	584.36 N	583.79 W	3.65	826.01
7920.00	7.90	310.70	7816.18	594.13 N	594.89 W	2.45	840.76
8021.00	6.30	317.70	7916.41	602.75 N	603.89 W	1.80	853.22
8114.00	4.50	314.60	8008.99	609.09 N	609.92 W	1.96	861.97
8208.00	3.20	314.20	8102.78	613.51 N	614.42 W	1.38	868.28
8298.00	2.30	314.20	8192.67	616.52 N	617.52 W	1.00	872.60
8393.00	2.40	322.60	8287.59	619.43 N	620.10 W	0.38	876.47
8488.00	1.60	323.70	8382.53	622.07 N	622.09 W	0.84	879.76
8581.00	0.90	286.50	8475.51	623.33 N	623.56 W	1.12	881.68
8676.00	1.00	244.00	8570.50	623.18 N	625.02 W	0.73	882.61
8767.00	0.40	259.70	8661.49	622.77 N	626.04 W	0.69	883.05
8862.00	0.70	210.20	8756.49	622.21 N	626.66 W	0.56	883.09
8956.00	0.90	224.60	8850.48	621.19 N	627.47 W	0.30	882.94
9194.00	2.00	183.30	9088.41	615.71 N	629.02 W	0.61	880.16 SS
9444.00	3.00	213.30	9338.17	605.89 N	632.86 W	0.65	875.94 SS
9694.00	1.70	228.30	9587.96	597.95 N	639.23 W	0.57	874.83 SS
9839.00	2.50	209.40	9732.86	593.77 N	642.38 W	0.72	874.10
9858.00	2.50	204.20	9751.85	593.03 N	642.76 W	1.19	873.84
9889.00	2.60	201.70	9782.82	591.76 N	643.29 W	0.48	873.33
9921.00	2.60	199.20	9814.78	590.40 N	643.80 W	0.35	872.72
9953.00	2.70	186.20	9846.75	588.96 N	644.12 W	1.90	871.94
9984.00	2.90	179.90	9877.71	587.45 N	644.20 W	1.18	870.92
10016.00	2.70	175.70	9909.67	585.89 N	644.14 W	0.89	869.78
10048.00	2.60	165.80	9941.64	584.44 N	643.91 W	1.46	868.58
10079.00	2.50	152.50	9972.61	583.16 N	643.42 W	1.93	867.34
10111.00	2.30	149.30	10004.58	581.98 N	642.77 W	0.75	866.05
10143.00	2.10	137.70	10036.56	581.00 N	642.05 W	1.52	864.84
10175.00	1.90	119.40	10068.54	580.31 N	641.19 W	2.08	863.74
10206.00	2.20	100.40	10099.52	579.95 N	640.16 W	2.38	862.76
10237.00	2.50	89.20	10130.49	579.85 N	638.90 W	1.77	861.80
10269.00	2.90	79.70	10162.46	580.00 N	637.40 W	1.87	860.85
10300.00	2.90	71.30	10193.42	580.39 N	635.89 W	1.37	860.06
10331.00	2.90	66.30	10224.38	580.96 N	634.43 W	0.82	859.42
10363.00	2.40	57.90	10256.34	581.64 N	633.12 W	1.97	858.98
10393.00	2.10	62.10	10286.32	582.23 N	632.10 W	1.14	858.68
10425.00	1.70	62.50	10318.30	582.73 N	631.16 W	1.25	858.36
10456.00	1.60	49.80	10349.29	583.22 N	630.42 W	1.22	858.19
10487.00	1.10	42.80	10380.28	583.72 N	629.89 W	1.70	858.16
10519.00	1.10	35.80	10412.28	584.19 N	629.50 W	0.42	858.22

All data is in feet unless otherwise stated.
Coordinates from structure and TVD from rotary table.
Bottom hole distance is 851.89 on azimuth 313.52 degrees from wellhead.
Vertical section is from N 0.00 E 0.00 on azimuth 314.98 degrees.
Calculation uses the minimum curvature method.
Presented by Baker Hughes INTEQ

DEVON ENERGY
North Pure Gold 8 Fed 10, slot #1
Eddy County New Mexico

SURVEY LISTING Page 4
Your ref : ST01 MWD
Last revised : 30-May-2006

Measured Depth	Inclin. Degrees	Azimuth Degrees	True Vert Depth	R E C T A N G U L A R C O O R D I N A T E S		Dogleg Deg/100ft	Vert Sect
10551.00	1.10	29.10	10444.27	584.71 N	629.17 W	0.40	858.35
10582.00	0.90	21.30	10475.27	585.19 N	628.94 W	0.78	858.53
10613.00	0.80	12.50	10506.26	585.63 N	628.81 W	0.53	858.75
10644.00	0.70	352.50	10537.26	586.03 N	628.78 W	0.90	859.01
10675.00	0.70	355.00	10568.26	586.41 N	628.82 W	0.10	859.31
10707.00	0.50	306.50	10600.26	586.69 N	628.95 W	1.64	859.60
10737.00	0.30	333.50	10630.25	586.83 N	629.09 W	0.90	859.80
10768.00	0.20	347.60	10661.25	586.96 N	629.14 W	0.38	859.92
10800.00	0.30	303.60	10693.25	587.06 N	629.22 W	0.65	860.05
10830.00	0.30	290.60	10723.25	587.13 N	629.36 W	0.23	860.20
10861.00	0.40	335.30	10754.25	587.26 N	629.48 W	0.91	860.38
10893.00	0.40	346.90	10786.25	587.47 N	629.56 W	0.25	860.58
10924.00	0.30	310.70	10817.25	587.63 N	629.64 W	0.77	860.75
10956.00	0.60	344.40	10849.25	587.84 N	629.75 W	1.21	860.98
10988.00	0.20	18.50	10881.25	588.06 N	629.78 W	1.40	861.15
11019.00	0.90	353.60	10912.25	588.35 N	629.79 W	2.33	861.36
11051.00	0.40	16.80	10944.25	588.71 N	629.78 W	1.73	861.61
11083.00	0.90	29.10	10976.24	589.03 N	629.63 W	1.61	861.73
11114.00	0.90	55.00	11007.24	589.39 N	629.31 W	1.30	861.76
11146.00	0.90	44.90	11039.24	589.71 N	628.93 W	0.50	861.72
11177.00	1.20	67.00	11070.23	590.01 N	628.46 W	1.61	861.59
11209.00	1.50	79.30	11102.22	590.22 N	627.74 W	1.30	861.23
11241.00	1.50	76.50	11134.21	590.39 N	626.92 W	0.23	860.78
11270.00	1.30	96.30	11163.20	590.44 N	626.22 W	1.79	860.32
11301.00	1.70	102.50	11194.19	590.31 N	625.42 W	1.39	859.66
11332.00	1.70	121.90	11225.18	589.96 N	624.58 W	1.85	858.82
11363.00	1.80	111.70	11256.17	589.54 N	623.74 W	1.05	857.93
11395.00	1.80	124.00	11288.15	589.07 N	622.86 W	1.21	856.97
11426.00	1.70	126.50	11319.13	588.53 N	622.09 W	0.41	856.04
11458.00	1.60	112.00	11351.12	588.08 N	621.29 W	1.34	855.16
11489.00	1.30	116.30	11382.11	587.76 N	620.57 W	1.03	854.43
11520.00	1.70	118.70	11413.10	587.38 N	619.85 W	1.31	853.65
11552.00	1.80	111.30	11445.09	586.97 N	618.97 W	0.77	852.74
11593.00	1.80	102.00	11486.07	586.61 N	617.74 W	0.71	851.61

All data is in feet unless otherwise stated.
Coordinates from structure and TVD from rotary table.
Bottom hole distance is 851.89 on azimuth 313.52 degrees from wellhead.
Vertical section is from N 0.00 E 0.00 on azimuth 314.98 degrees.
Calculation uses the minimum curvature method.
Presented by Baker Hughes INTEQ

DEVON ENERGY

Structure : North Pure Gold 8 Fed 10
 Slot : slot #1
 Location : Eddy County New Mexico

