District Energy, Minerals and Natural May 27, 2004
Solution
Santa Fe, NM 87505 Sundry Notices and Reports on Wells of Sundry Notices and Reports on Wells on Wells of Sundry Notices and Reports on Wells o
SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.) 1. Type of Well: Oil Well
SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCCE PROPOSALS.) 1. Type of Well; Oil Well
1. Type of Well: Oil Well
Chesapeake Operating Inc. 3. Address of Operator 2010 Rankin Hwy Midland, TX 79701 4. Well Location Unit Letter F : 2030 feet from the North line and 1980 feet from the West line Section 25 Township 18S Range 28E NMPM CountyEddy 11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3453.5 GR Pit or Below-grade Tank Application or Closure Pit type Depth to Groundwater Distance from nearest fresh water well Distance from nearest surface water Pit Liner Thickness: mil Below-Grade Tank: Volume bbls; Construction Material 12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data NOTICE OF INTENTION TO: SUBSEQUENT REPORT OF: PERFORM REMEDIAL WORK PLUG AND ABANDON REMEDIAL WORK ALTERING CASING COMMENCE DRILLING OPNS: PAND A PULL OR ALTER CASING MULTIPLE COMPL CASING/CEMENT JOB OTHER: OTHER: 13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.
Undes Turkey Track; Morrow, North
4. Well Location
Section 25 Township 18S Range 28E NMPM CountyEddy 11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3453.5 GR Pit or Below-grade Tank Application or Closure Pit type Depth to Groundwater Distance from nearest fresh water well Distance from nearest surface water Pit Liner Thickness: mil Below-Grade Tank: Volume bbls; Construction Material 12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data NOTICE OF INTENTION TO: SUBSEQUENT REPORT OF: PERFORM REMEDIAL WORK PLUG AND ABANDON REMEDIAL WORK ALTERING CASING COMMENCE DRILLING OPNS. PAND A COMMENCE DRILLING OPNS. PAND A CASING/CEMENT JOB OTHER: OTHER: 13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3453.5 GR Pit or Below-grade Tank Application
3453.5 GR Pit or Below-grade Tank Application
Pit typeDepth to GroundwaterDistance from nearest fresh water wellDistance from nearest surface water
12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data NOTICE OF INTENTION TO: PERFORM REMEDIAL WORK □ PLUG AND ABANDON ☒ REMEDIAL WORK □ ALTERING CASING □ TEMPORARILY ABANDON □ CHANGE PLANS □ COMMENCE DRILLING OPNS:□ P AND A □ PULL OR ALTER CASING □ MULTIPLE COMPL □ CASING/CEMENT JOB □ OTHER: □ OTHER: □ 13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.
NOTICE OF INTENTION TO: PERFORM REMEDIAL WORK PLUG AND ABANDON REMEDIAL WORK ALTERING CASING COMMENCE DRILLING OPNS: P AND A DULL OR ALTER CASING MULTIPLE COMPL CASING/CEMENT JOB OTHER: OTHER: DTHER:
PERFORM REMEDIAL WORK PLUG AND ABANDON
TEMPORARILY ABANDON CHANGE PLANS COMMENCE DRILLING OPNS. P AND A CASING/CEMENT JOB OTHER: OTHER: OTHER: OTHER: Casing any proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.
PULL OR ALTER CASING
OTHER: OTHER: OTHER: Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.
13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.
of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.
•
Notify OCD 24 hm my
Notify OCD 24 hrs. prior To any work done.
io driy work done.
I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines , a general permit or an (attached) alternative OCD-approved plan .
SIGNATURE DATE 04/19/2007
Type or print name Shay Stricklin E-mail address:sstricklin@chkenergy.com Telephone No. (432)687-2992 For State Use Only
APPROVED BY: Milliams TITLE CO DATE 4/25/07 Conditions of Approval (if any):

Turkey Track State Com 2 **Plug and Abandonment Procedure Eddy County, New Mexico**

- 1. Notify the NMOCD 24 hrs in advance prior to commencing plug and abandonment operations.
- 2. MIRU Well Service Unit. ND wellhead. NU BOP.
- 3. RIH with tubing to PBTD ~8490'. Circulate 4-1/2" casing with salt gel mud containing 9.5 pound brine and 25 lbs of gel per barrel.
- 4. Spot a 100' Class "C" Neat cmt plug from 5500 5600'. Shut in for 4 hrs and tag top of cement. Spot additional cement if needed.
- * 5. Spot a 100' Class "C" Neat cmt plug from 3190-3290' (9-5/8" shoe). Shut in for 4 hrs and tag top of cement. Spot additional cement if needed.
- 6. Spot a 100' Class "C" Neat cmt plug from 360-460' (13-3/8" shoe). Shut in for 4 hrs and tag top of cement. Snot additional compart if needs:
 - 7. Spot a 60' Class "C" Neat cmt plug from 63-3'.
 - 8. ND BOP. Cut off casings 3' below Ground Level.
- 9. Weld on an ID plate. RD and release Well Service Unit. Restore location per BLM requirements.

CURRENT WELLBORE SCHEMATIC CHESAPEAKE OPERATING, INC

WELL

: TURKEY TRACK STATE COM #2

FIELD

: TURKEY TRACK NORTH

COUNTY

: EDDY STATE : NM

LOCATION : 2,030 FNL & 1,980 FWL OF SEC. 25-18S-28E

ELEVATION: GL 3,453.5'

KB 3,468.6'

Chesabeake


API#

30-015-22458

SPUD COMPL 5/17/78 7/31/78

CHK#

891349

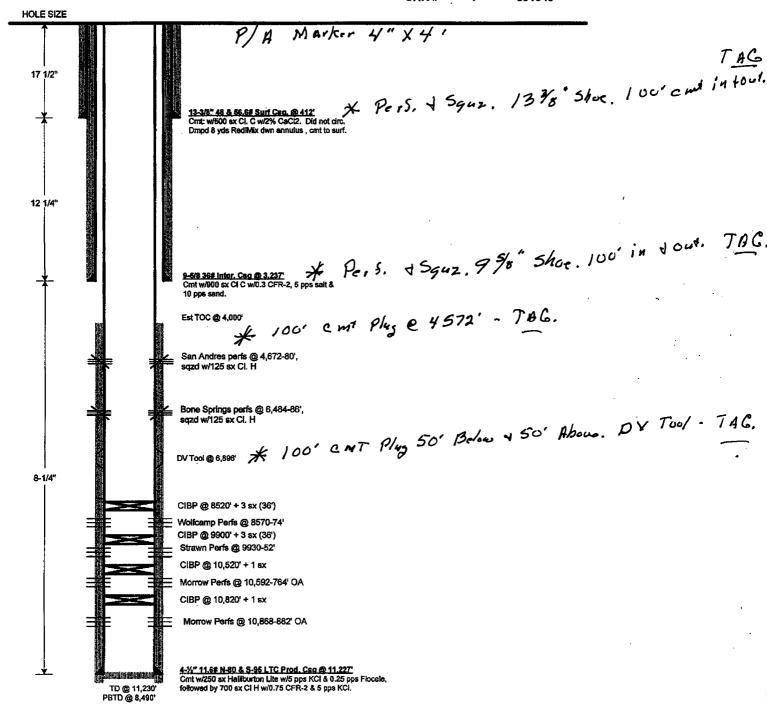

PREPARED BY:	Linda S. Fries	DATE:	8/26/05
UPDATED BY:	AJM	DATE:	4/19/07