

State of New Mexico
Energy, Minerals and Natural Resources Department

DISTRICT I

P.O. Box 1980, Hobbs NM 88240

DISTRICT II

P.O. Drawer DD, Artesia NM 88210

DISTRICT III

1000 Rio Brazos Rd., Aztec NM 87410

OIL CONSERVATION DIVISION
P.O. Box 2088
Santa Fe, New Mexico 87504-2088

WELL API NO.	30-015-20056
5. Indicate Type of Lease State <input type="checkbox"/> FEE <input checked="" type="checkbox"/>	
6. State Oil & Gas Lease No.	
7. Lease Name or Unit Agreement Name STARK BG	
8. Well No 1	
9. Pool Name or Wildcat PENASCO DRAW SAN ANDRES YESO	

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE " APPLICATION FOR PERMIT (FORM C-101) FOR SUCH PROPOSALS.)	
1. Type of Well: OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER <input type="checkbox"/>	
2. Name of Operator Yates Petroleum Corporation	
3. Address of Operator 105 South 4th., Artesia, NM 88210	
4. Well Location Unit Letter 660 Feet From The NORTH Line and WEST Line Section 25 Township T18S Rang. R25E NMPM EDDY COUNTY	
10. Elevation (Show whether DF, RKB, RT, GR, etc.)	

11. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐
OTHER ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐
CASING TEST AND CEMENT JOB ☐
OTHER ☐

12. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

YATES PETROLEUM CORPORATION respectfully requests permission to plug & abandon this well as follows:
NOTIFY NMOCD at least 24 hours before starting work.

1. MIRU WSU. ND wellhead; NU BOP. RU all H2S & safety equipment. No casing recovery will be attempted. POH w/ tbg & pkr if present.
2. Tally tubing & TIH open ended to 2695'. Load hole w/ plugging mud & spot 25 sk plug from 2541'-2695'. Pull 5 stands & reverse circ to clean out tubing. **-TAG**
3. Move tubing to 2092'. Load hole w/ plugging mud & spot 25 sk plug from 1947'-2092'. Pull 5 stands & reverse circ to clean out tubing. This will leave a plug across the Glorieta top.
4. Move tubing to 1139'. Load hole w/ plugging mud & spot 25 sk plug from 994'-1139'. Pull 5 stands & reverse circ to clean out tubing & POH. This will leave a plug across the Surface casing shoe. WOC 4 hours & tag - reset if necessary.
5. RU WL & perforate 6 squeeze holes @ 150'. Tie onto casing & establish circ back up annulus. Pump 60 sx Class C cement; this should circ cement from 150' to surface; do not displace cement. WOC 24 hrs & tag; reset if necessary.
6. Remove all surface equipment & weld dry hole marker per regulations.

I hereby certify that the information above is a true and complete to the best of my knowledge and belief.

SIGNATURE Donna Clack TITLE REGULATORY COMPLIANCE DATE 10/3/03
TYPE OR PRINT NAME DONNA CLACK TELEPHONE NO. 505-748-1471

(This space for State Use)

APPROVED BY

CONDITIONS OF APPROVAL, IF ANY:

TITLE

DATE

APPROVED OCT 16 2003

WELL NAME: Stark BG No. 1

FIELD: Penasco Draw S.A. Yeso

LOCATION: 660' FNL & 2,310' FWL Sec 25-18S-25E

Eddy County NM

GL: 3457'

ZERO:


KB:

SPUD DATE: 6-06-67

COMPLETION DATE: 8-10-67

COMMENTS: 30-105-20056

CASING PROGRAM	
9-5/8"	1,089'
7" 20# H-40 1,911' Class "A"	
7" 23# J-55 1,431' Class "B"	3,300'

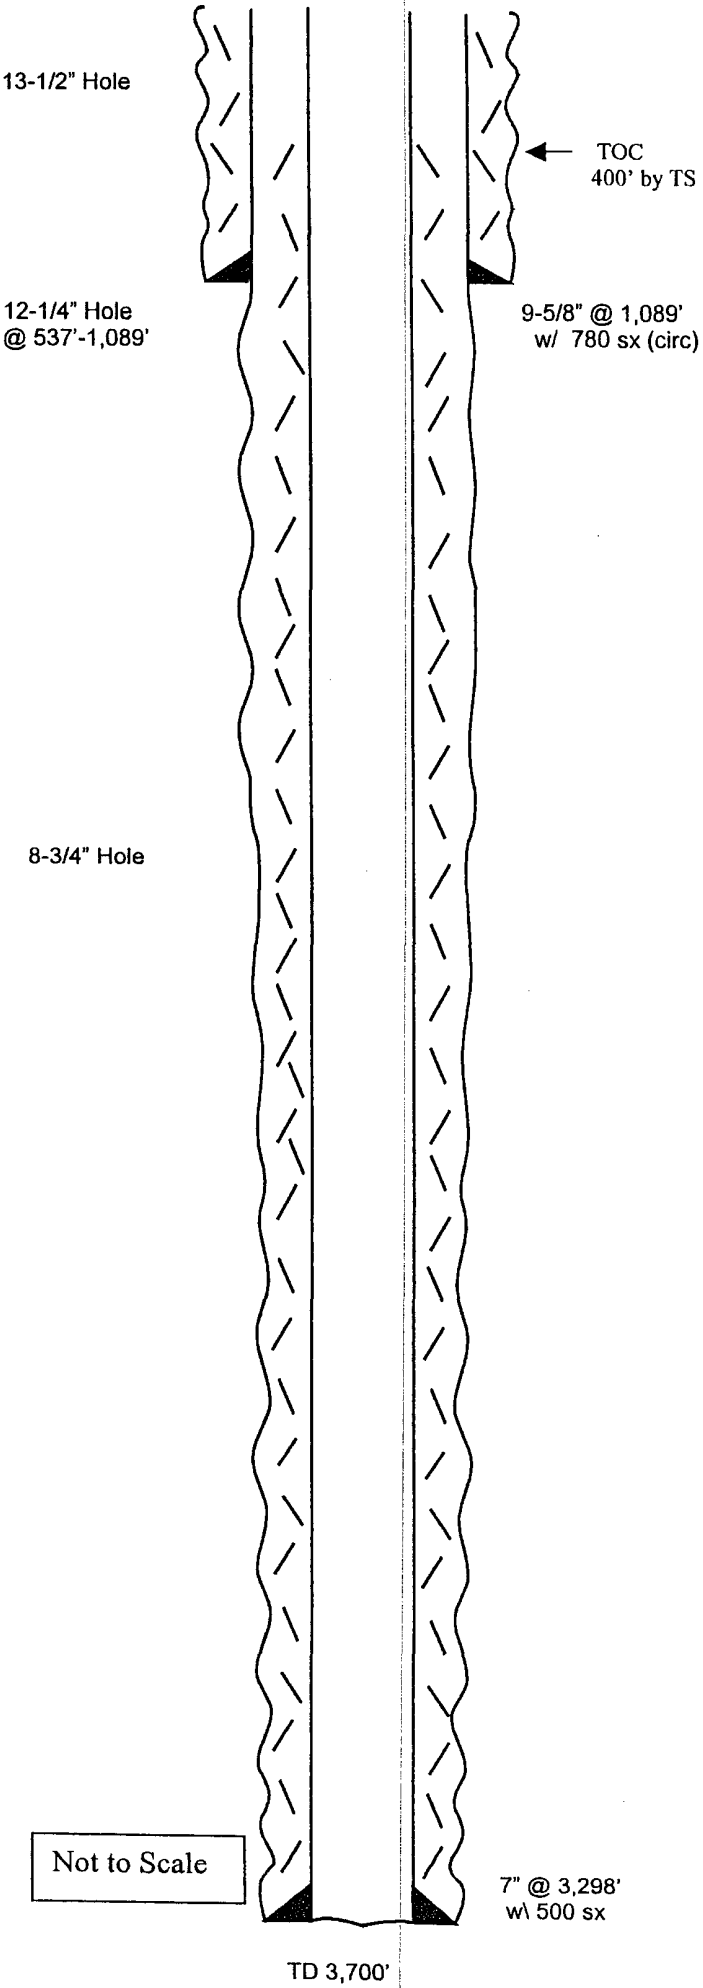

Before

TOPS:	
San Andres	758'
Glorieta	2,092'
Yeso	2,167'


Perforations:	
1,440' – 1,470' (70)	
1,440'– 1,455' (30)	
1,460'– 1,475' (40)	
2,107'– 2,217' (42)	
2,197'– 2,245' (60)	
2,411'– 2,420' (18)	
2,411'– 2,505' (60)	
2,470'– 2,479' (18)	
2,495'– 2,505' (24)	
2,976'– 2,985' (18)	
2,976'– 3,143' (60)	
3,010'– 3,018' (16)	
3,125'– 3,143' (16)	



WELL NAME: Stark BG No. 1 FIELD: Penasco Draw S.A. Yeso
LOCATION: 660' FNL & 2,310' FWL Sec 25-18S-25E Eddy County NM
GL: 3457' ZERO: KB:
SPUD DATE: 6-06-67 COMPLETION DATE: 8-10-67
COMMENTS: 30-105-20056

CASING PROGRAM

9-5/8"	1,089'
7" 20# H-40 1,911' Class "A"	
7" 23# J-55 1,431' Class "B"	3,300'

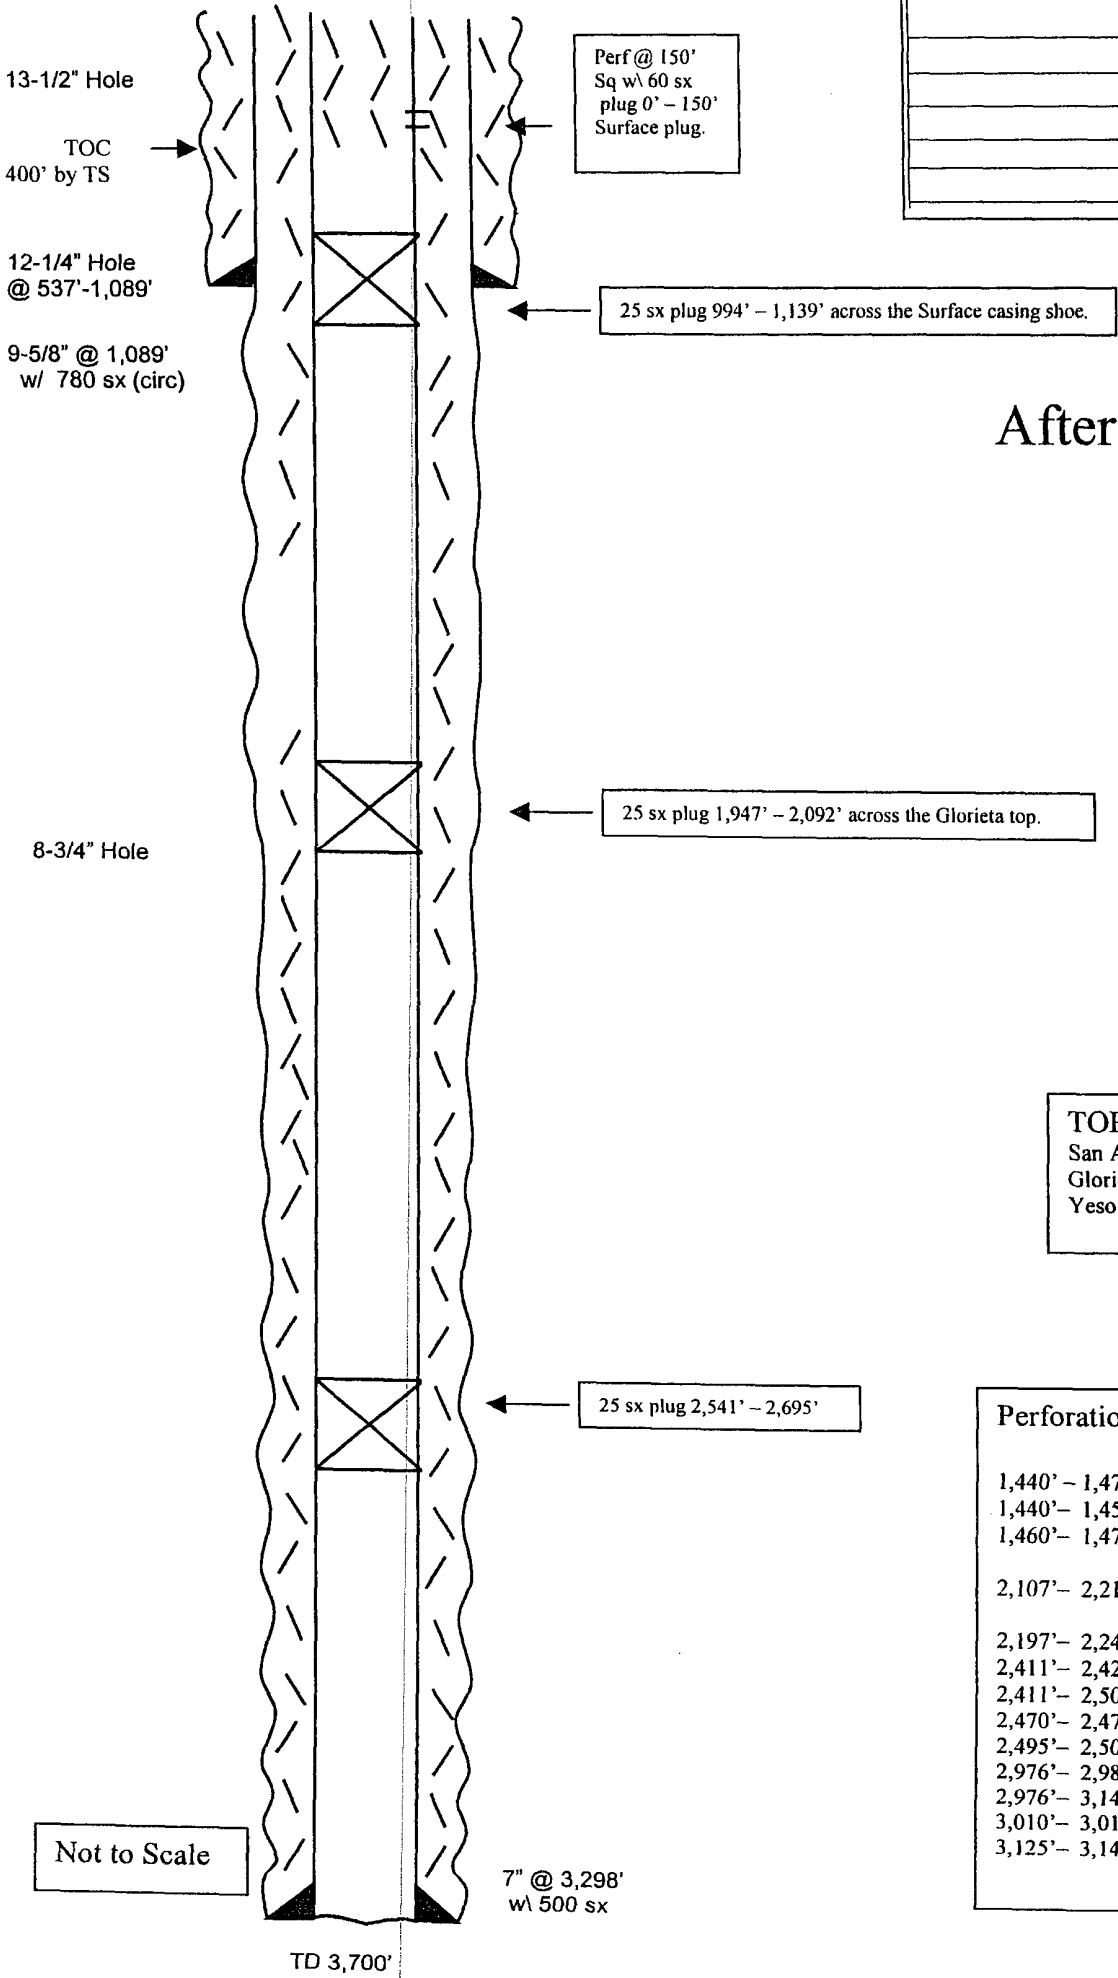

TOPS:	
San Andres	758'
Glorieta	2,092'
Yeso	2,167'

Perforations:	
1,440' - 1,470' (70)	
1,440' - 1,455' (30)	
1,460' - 1,475' (40)	
2,107' - 2,217' (42)	
2,197' - 2,245' (60)	
2,411' - 2,420' (18)	
2,411' - 2,505' (60)	
2,470' - 2,479' (18)	
2,495' - 2,505' (24)	
2,976' - 2,985' (18)	
2,976' - 3,143' (60)	
3,010' - 3,018' (16)	
3,125' - 3,143' (16)	