

Submit 3 Copies To Appropriate District Office
District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103
Revised June 10, 2003

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-015-00207
1. Type of Well: Oil Well <input type="checkbox"/> Gas Well <input checked="" type="checkbox"/> Other— Water Injection Well		5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
2. Name of Operator Devon Energy Production Company, LP		6. State Oil & Gas Lease No.
3. Address of Operator 20 North Broadway, Suite 1500, Oklahoma City, Oklahoma 73102		7. Lease Name or Unit Agreement Name Atoka San Andres Unit
4. Well Location Unit Letter <u>F</u> : 1650' _____ feet from the <u>North</u> _____ line and <u>2980'</u> _____ feet from the <u>East</u> _____ line Section <u>14</u> Township <u>18S</u> Range <u>26E</u> Eddy County		8. Well Number 135
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3314' GL; 3324' KB		9. OGRID Number 6137
		10. Pool name or Wildcat Atoka San Andres

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

- PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐
OTHER: ☐

SUBSEQUENT REPORT OF:

- REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐
CASING TEST AND CEMENT JOB ☐
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

1. MIRU. Circulate wellbore w/10 ppg mud. POOH w/ 2-3/8" tubing. TIH and dump bail 35' cement on top of existing CIBP at 1,575'.
2. Spot 25 Sx cement (240') at 1,145' in 5-1/2" casing. WOC & Tag. (8-5/8" casing shoe @ 1,095')
3. Circulate 25 Sx cement from 240' to surface.
4. Cut wellhead off 3' below ground level. Set dry hole marker.
5. Clean location.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Ronnie Slack TITLE: Engineering Technician DATE 12/26/07

Type or print name Ronnie Slack E-mail address: Ronnie.Slack@dmr.com Telephone No. 405-552-4615

(This space for State use)

APPROVED BY PhD Hank TITLE Compliance Officer DATE 1/8/08
Conditions of approval, if any:

Notify OCD 24 hrs. prior
to any work done.

DEVON ENERGY PRODUCTION COMPANY LP

Well Name: ATOKA SAN ANDRES UNIT #135		Field: ATOKA SAN ANDRES	
Location: 1650' FNL & 2980' FEL; SEC 14-T18S-R26E		County: EDDY	State: NM
Elevation: 3324' KB; 3314' GL		Spud Date: 9/6/57	Compl Date: 9/23/57
API#: 30-015-00207	Prepared by: Ronnie Slack	Date: 12/26/07	Rev:

PROPOSED PLUG & ABANDONMENT

Proposed PA

1. Circulate 25 Sx cement from 240' to surface.
2. Cut wellhead off & set dry hole marker.
3. Clean location.

10# Mud

Proposed PA

1. Spot 25 Sx cement (240') @ 1,145'. WOC & Tag.

10# Mud

Proposed PA

1. Circulate wellbore w/10# mud
2. Dump 35' cement on existing CIBP at 1,575'.

CIBP @ 1,575' (3/82)

1,708' PBTD

1,743' TD

11" Hole

8-5/8", 24#, J55, @ 1,095'

Cmt'd w/450 Sx. Circulated to surface.

SAN ANDRES

1,652' - 1,660' (4 spf)

7-7/8" Hole

5-1/2", 14#, J55, @ 1,740'

Cmt'd w/475 Sx. Circulated to surface.

DEVON ENERGY PRODUCTION COMPANY LP


Well Name: ATOKA SAN ANDRES UNIT #135		Field: ATOKA SAN ANDRES	
Location: 1650' FNL & 2980' FEL; SEC 14-T18S-R26E		County: EDDY	State: NM
Elevation: 3324' KB; 3314' GL		Spud Date: 9/6/57	Compl Date: 9/23/57
API#: 30-015-00207	Prepared by: Ronnie Slack	Date: 12/26/07	Rev:

CURRENT WELLBORE SCHEMAT

11" Hole
8-5/8", 24#, J55, @ 1,095'
 Cmt'd w/450 Sx. Circulated to surface.

SAN ANDRES
 1,652' - 1,660' (4 spf)

7-7/8" Hole
5-1/2", 14#, J55, @ 1,740'
 Cmt'd w/475 Sx. Circulated to surface.

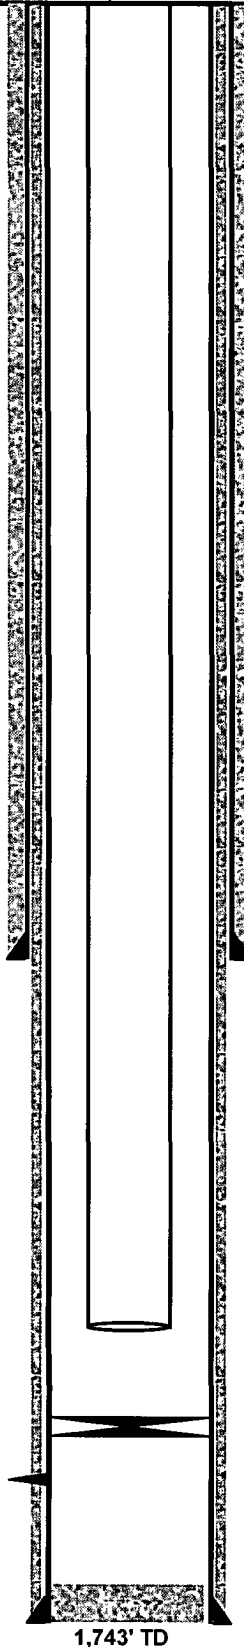

2-3/8", Production Tubing (Tubing depth Unknown)

CIBP @ 1,575' (3/82)

1,708' PBTD

1,743' TD