Form 3160-5 (April 2004)

Notice of Intent

__ Subsequent Report

Final Abandonment Notice

UNITED STATES DEPARTMENT OF THE INTERIOR **BUREAU OF LAND MANAGEMENT**

SUNDRY NOTICES AND REPORTS ON WELL

	5 Lease Serial No NM-15295 6 If Indian, Aflottee or Tribe Name N/A		
5			
r an sals.			
side.	7 If Unit or CA/Agreement, Name and/or N/A		
008	8 Well Name and No. CK FEDERAL # 4		
	9 API Well No 30-015-35942		
	10 Field and Pool, or Exploratory Area WHITE CITY PENN-GAS		
	11 County or Parish State EDDY, NM		
OF NOTICE. I	REPORT. OR OTHER DATA		
F ACTION			
Production (S	tart/Resume) Water Shut-Off		

Other

Do not use this form for proposals to drill or to re-enter abandoned well. Use Form 3160-3 (APD) for such propo SUBMIT IN TRIPLICATE- Other instructions on reverse 1 Type of Well Öıl Well ✓ Gas Well Other 2 Name of Operator **ENCORE OPERATING, L.P.** 3a Address 777 MAIN STREET, STE. 1400 FT. WORTH, TX. 76102 817-877-9955 4 Location of Well (Footage, Sec., T., R., M., or Survey Description) 2540' FNL & 180' FWL SEC. 8 T24S-R26E 12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE TYPE OF SUBMISSION TYPE

13 Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones Attach the Bond under which the work will be performed or provide the Bond No on file with BLM/BIA Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

Deepen

l Plug Back

Fracture Treat

New Construction

Plug and Abandon

Recomplete

Water Disposal

Temporarily Abandon

CHANGE IN BOP BECAUSE OF CHANGE IN RIG BEING USED THAN ORIGINALLY PLANNED

Acidize

Alter Casing

✓ Change Plans

Casing Repair

Convert to Injection


After setting 13-3/8" surface easing, a 13-5/8" x 3M Diverter Stack will be installed to drill the 12-1/4" hole. This will consist or a 13-5/8" x 3M spool (mud cross) with a 13-5/8" x 3M annular preventer and rotating head on top. Upon setting 9-5/8" casing, an 11" x 5M BOP will be installed to finish the hole. This will consist of a 11" 5M spool (mud cross) and 11" 5M double stack with pipe rams and blind rams with rotating head on top.

BOP SCHEMATIC ATTACHED.

14 Thereby certify that the foregoing is true and correct				
Name (Printed/Typed)				
ANN BURDETTE WILEY	Title REGULATORY MANAGER			
Signature Confidence of the Co	Date	05/08/2008	APPROVED	
THIS SPACE FOR FEDERAL OR STATE OFFICE USE				
Approved by	Title		Date MAY 1 2 2003	
Conditions of approval, if any are attached. Approval of this notice does not warrant certify that the applicant holds legal or equitable title to those rights in the subject less which would entitle the applicant to conduct operations thereon.	ſ		WESLEY W. INGRAM PETROLEUM ENGINEER	
Title 18 11 S.C. Section 1001 and Title 13 11 S.C. Section 1212, make it a crime for any	person knowingly	and wallfully to make to		

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to—any department or agency of the States any talse, fictitious or fraudulent statements or representations as to any matter within its jurisdiction

13-3/8" Surface Casing Installation

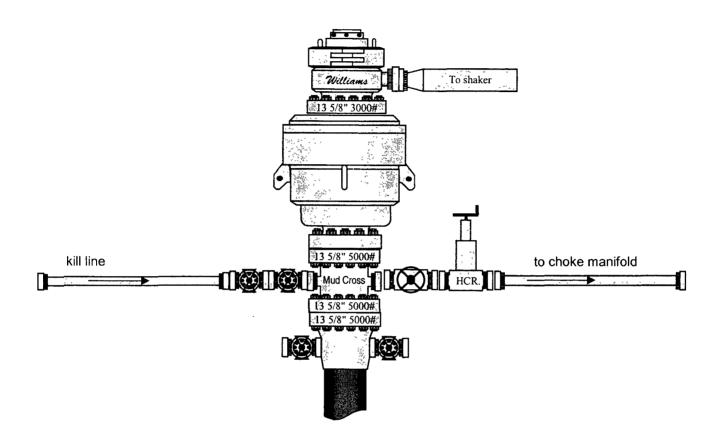

9-5/8" Casing Installation

