

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENTFORM APPROVED
OMB No. 1004-0137
Expires July 31, 2010

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

1a Type of Well ☒ Oil Well ☐ Gas Well ☐ Dry ☐ Other				5 Lease Serial No NM 2748/LC029338A					
b Type of Completion ☒ New Well ☐ Work Over ☐ Deepen ☐ Plug Back ☐ Diff. Resvr. ☐ Other				6 If Indian, Allottee or Tribe Name					
2 Name of Operator BURNETT OIL, CO., INC.				7 If Unit or CA Agreement, Name and No					
3 Address 801 CHERRY ST. 1500 UNIT #9 FORT WORTH, TX 76102				8 Lease Name and Well No GISSLER B #40H					
3a Phone No. (include area code) (817) 332-5108				9 API Well No. 30-015-36034					
4 Location of Well (Report location clearly and in accordance with Federal requirements *) At Surface UNIT I, 2310' FSL, 990' FEL, NM 2748 At top prod. interval reported below UNIT P, 332' FSL, 1002' FEL, LC029339A				10 Field and Pool, or Exploratory LOCO HILLS PADDOCK					
JUN 30 2008 OCD-ARTESIA				11 Sec., T., R., M., on Block and Survey or Area SEC 11 T17S, R30E					
				12 County or Parish EDDY CTY		13 State NM			
14 Date Spudded 05/2/2008		15 Date T.D. Reached 5/17/2008		16 Date Completed 6/09/2008 ☐ D&A ☒ Ready to Prod.		17 Elevations (DF, RKB, RT, GL)* 3738'			
18 Total Depth MD TVD 6745' MD		19 Plug Back T.D. MD TVD 6708' MD		20 Depth Bridge Plug Set MD TVD N/A					
21 Type Electric & Other Mechanical Logs Run (Submit copy of each) DLL, MICRO-G, SD, DSN, SPEC GR				22 Was well cored? ☒ No ☐ Yes (Submit analysis) Was DST run? ☒ No ☐ Yes (Submit report) Directional Survey? ☐ No ☒ Yes (Submit copy)					
23 Casing and Liner Record (Report all strings set in well)									
Hole Size	Size/Grade	Wt. (#/ft)	Top (MD)	Bottom (MD)	Stage Cementer Depth	No. of Sks. & Type of Cement	Slurry Vol (BBL)	Cement Top*	Amount Pulled
14.75"	10.75" H	32.75#		412'		441 SX C	114	SURFACE	0
8.75"	7" J	23.00#		6745'	2628'	2700 SX C	858	SURFACE	0
24 Tubing Record									
Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	
2.875"	4517'								
25. Producing Intervals					26 Perforation Record				
Formation	Top	Bottom	Perforated Interval	Size	No. Holes	Perf. Status			
A) L. HILLS PADDOCK	4538' TVD	4799' TVD	4897' TO 6600'	0.40	60	6SPF			
B)									
C)									
D)									
27 Acid, Fracture, Treatment, Cement Squeeze, Etc									
Depth Interval		Amount and Type of Material							
4897'-6600'		2500 GAL 15% NEFE ACID							
4897'-6600'		186,157 GALS WFG-R35, 148,355 GALS HEATED 20% HCL, 10,000 GAL F/W FLUSH							
28 Production - Interval A									
Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr API	Gas Gravity	Production Method
6/09/08	6/13/08	24	→	225	237	1936	37.0		Pumping
Choke Size	Tbg. Press Flwg. SI	Csg. Press	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas : Oil Ratio	Well Status	
			→						
28a Production - Interval B									
Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas : Oil Ratio	Well Status	
			→						

(See instructions and spaces for additional data on reverse side)

28b Production - Interval C									
Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg Press Flwg. SI	Csg. Press.	24 Hr Rate →	Oil BBL	Gas MCF	Water BBL	Gas : Oil Ratio	Well Status	

28c Production - Interval D									
Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg Press Flwg. SI	Csg. Press.	24 Hr Rate →	Oil BBL	Gas MCF	Water BBL	Gas : Oil Ratio	Well Status	

29 Disposition of Gas (Sold, used for fuel, vented, etc.)

Sold through Gissler B 3-1 Battery to DCP Midstream

30 Summary of Porous Zones (Include Aquifers)

Show all important zones of porosity and contents thereof. Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries

31. Formation (Log) Markers

Formation	Top	Bottom	Descriptions, Contents, etc.	Name	Top
					Meas. Depth
				ALLUVIUM	SURFACE
				ANHYDRITE	292'
				SALT	490'
				BASE SALT	1256'
				SEVEN RIVERS	1637'
				QUEEN	2314'
				GRAYBURG	2709'
				SAN ANDRES	3023'
				GLORIETA	4475'
				YESO	4588' <i>EST</i>

32 Additional remarks (include plugging procedure)

33. Indicate which items have been attached by placing a check in the appropriate boxes:

- ☒ Electrical/Mechanical Logs (1 full set req'd)
 ☐ Geologic Report
 ☐ DST Report
 ☒ Directional Survey
☐ Sundry Notice for plugging and cement verification
 ☐ Core Analysis
 ☒ Other: **DEVIATION SURVEY**

34. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions)*

Name (please print) MARK A. JACOBY Title ENGINEERING MANAGER

Signature Mark A Jacoby Date 6/25/2008


Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Burnett Oil Company

HALLIBURTON

Sperry Drilling Services

Project: Eddy County, NM
 Site: Gissler B.
 Well: #40
 Wellbore: Wellbore #1
 Design: Wellbore #1 (#40/Wellbore #1)
 Rig: Union ##




WELLBORE TARGET DETAILS (MAP CO-ORDINATES)

Name	TVD	+N/-S	+E/-W	Northing	Easting	Shape
Gissler.B.40.PBHL	4800.00	-1979.50	6.60	670454.70	621817.80	Point


To convert a Magnetic Direction to a Grid Direction, Add 8°

Magnetic Model: BGGM2007 Date: 14-Apr-08
 Azimuths to Grid North

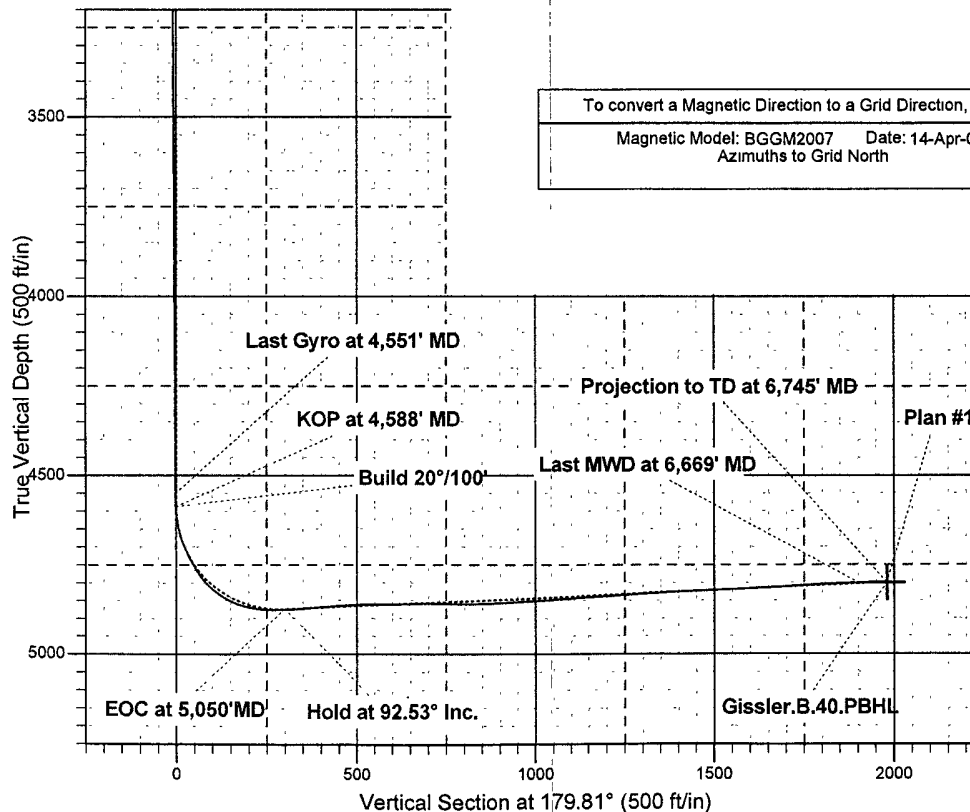

Surface Location

US State Plane 1927 (Exact solution)
 New Mexico East 3001
 Elevation: GL 3,738' + KB 12' @ 3750.00ft (Union ##)
 Northing: 672434.20 Easting: 621811.20 Latitude: 32° 50' 52.720 N Longitude: 103° 56' 12.102 W

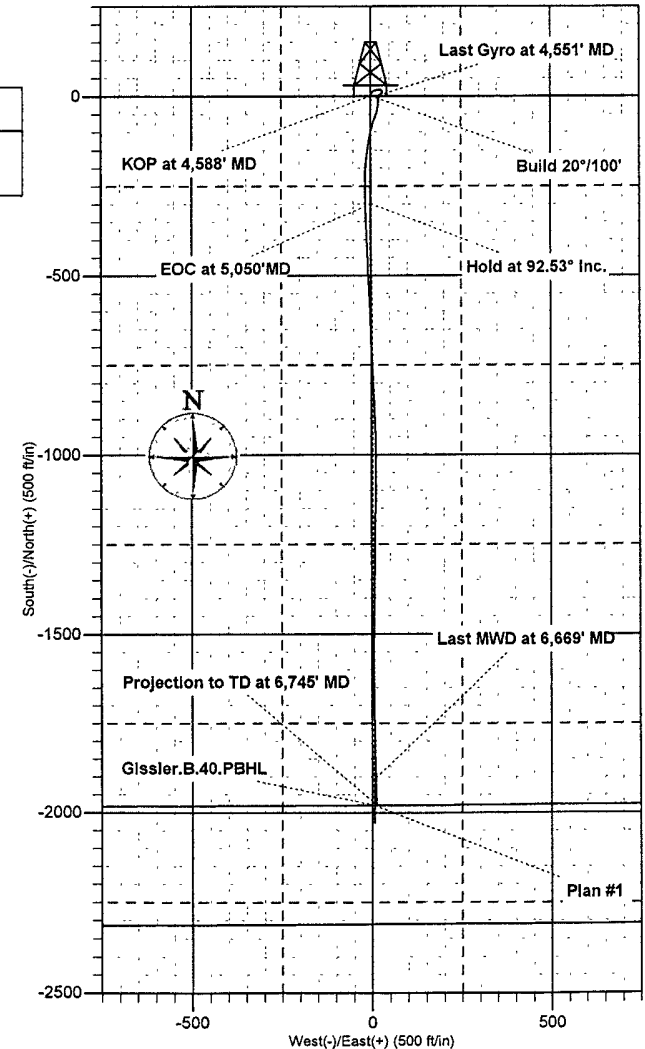

HALLIBURTON**Design Report for #40 - Wellbore #1**

Measured Depth (ft)	Inclination (°)	Azimuth (°)	TVD below System (ft)	Vertical Depth (ft)	Local Coordinates		Map Coordinates		Dogleg Rate (°/100ft)	Vertical Section (ft)
					Northing (ft)	Easting (ft)	Northing (ft)	Easting (ft)		
0.00	0.00	0.00	-3,750.00	0.00	0.00 N	0.00 E	672,434.20	621,811.20	0.00	0.00
100.00	0.14	229.86	-3,650.00	100.00	0.08 S	0.09 W	672,434.12	621,811.11	0.14	0.08
200.00	0.40	220.07	-3,550.00	200.00	0.42 S	0.41 W	672,433.78	621,810.79	0.26	0.42
300.00	0.67	288.23	-3,450.00	300.00	0.51 S	1.19 W	672,433.69	621,810.01	0.64	0.50
400.00	0.62	10.69	-3,350.01	399.99	0.21 N	1.65 W	672,434.41	621,809.55	0.85	-0.21
500.00	0.90	24.98	-3,250.02	499.98	1.45 N	1.21 W	672,435.65	621,809.99	0.34	-1.45
600.00	1.08	25.69	-3,150.03	599.97	3.01 N	0.47 W	672,437.21	621,810.73	0.18	-3.01
700.00	1.12	20.24	-3,050.05	699.95	4.78 N	0.27 E	672,438.98	621,811.47	0.11	-4.78
800.00	1.02	20.74	-2,950.07	799.93	6.53 N	0.93 E	672,440.73	621,812.13	0.10	-6.52
900.00	1.01	25.60	-2,850.08	899.92	8.15 N	1.62 E	672,442.35	621,812.82	0.09	-8.15
1,000.00	1.37	29.74	-2,750.11	999.89	9.99 N	2.60 E	672,444.19	621,813.80	0.37	-9.98
1,100.00	1.84	43.41	-2,650.15	1,099.85	12.19 N	4.29 E	672,446.39	621,815.49	0.60	-12.18
1,200.00	2.35	66.63	-2,550.21	1,199.79	14.17 N	7.28 E	672,448.37	621,818.48	0.98	-14.15
1,300.00	2.59	69.13	-2,450.30	1,299.70	15.79 N	11.27 E	672,449.99	621,822.47	0.26	-15.75
1,400.00	2.28	76.50	-2,350.39	1,399.61	17.06 N	15.32 E	672,451.26	621,826.52	0.44	-17.01
1,500.00	1.92	74.30	-2,250.46	1,499.54	17.98 N	18.86 E	672,452.18	621,830.06	0.37	-17.91
1,600.00	1.36	94.95	-2,150.50	1,599.50	18.33 N	21.66 E	672,452.53	621,832.86	0.81	-18.25
1,700.00	1.21	97.96	-2,050.53	1,699.47	18.08 N	23.89 E	672,452.28	621,835.09	0.16	-18.00
1,800.00	0.98	95.78	-1,950.55	1,799.45	17.84 N	25.78 E	672,452.04	621,836.98	0.23	-17.76
1,900.00	0.77	98.12	-1,850.56	1,899.44	17.66 N	27.30 E	672,451.86	621,838.50	0.21	-17.57
2,000.00	0.73	112.08	-1,750.57	1,999.43	17.33 N	28.55 E	672,451.53	621,839.75	0.19	-17.23
2,100.00	0.67	121.64	-1,650.57	2,099.43	16.78 N	29.64 E	672,450.98	621,840.84	0.13	-16.68
2,200.00	0.52	128.06	-1,550.58	2,199.42	16.20 N	30.50 E	672,450.40	621,841.70	0.16	-16.10
2,300.00	0.39	144.35	-1,450.58	2,299.42	15.64 N	31.05 E	672,449.84	621,842.25	0.18	-15.54
2,400.00	0.41	156.41	-1,350.58	2,399.42	15.04 N	31.39 E	672,449.24	621,842.59	0.09	-14.93
2,500.00	0.61	162.13	-1,250.59	2,499.41	14.20 N	31.70 E	672,448.40	621,842.90	0.21	-14.10
2,600.00	0.57	186.35	-1,150.59	2,599.41	13.20 N	31.81 E	672,447.40	621,843.01	0.25	-13.09
2,700.00	0.66	182.62	-1,050.60	2,699.40	12.13 N	31.73 E	672,446.33	621,842.93	0.10	-12.03
2,800.00	0.52	195.37	-950.60	2,799.40	11.12 N	31.58 E	672,445.32	621,842.78	0.19	-11.01
2,900.00	0.21	187.16	-850.61	2,899.39	10.50 N	31.44 E	672,444.70	621,842.64	0.31	-10.39
3,000.00	0.39	189.60	-750.61	2,999.39	9.98 N	31.36 E	672,444.18	621,842.56	0.18	-9.88
3,100.00	0.27	205.13	-650.61	3,099.39	9.43 N	31.20 E	672,443.63	621,842.40	0.15	-9.33
3,200.00	0.35	223.34	-550.61	3,199.39	9.00 N	30.89 E	672,443.20	621,842.09	0.13	-8.89
3,300.00	0.49	222.05	-450.61	3,299.39	8.46 N	30.40 E	672,442.66	621,841.60	0.14	-8.36
3,400.00	0.50	228.62	-350.62	3,399.38	7.85 N	29.78 E	672,442.05	621,840.98	0.06	-7.75
3,500.00	0.52	238.06	-250.62	3,499.38	7.32 N	29.07 E	672,441.52	621,840.27	0.09	-7.23
3,600.00	0.60	242.11	-150.63	3,599.37	6.84 N	28.22 E	672,441.04	621,839.42	0.09	-6.74
3,700.00	0.56	237.89	-50.63	3,699.37	6.33 N	27.34 E	672,440.53	621,838.54	0.06	-6.24
3,800.00	0.55	253.11	49.36	3,799.36	5.93 N	26.47 E	672,440.13	621,837.67	0.15	-5.85
3,900.00	0.56	241.80	149.36	3,899.36	5.56 N	25.58 E	672,439.76	621,836.78	0.11	-5.48
4,000.00	0.58	222.67	249.35	3,999.35	4.96 N	24.81 E	672,439.16	621,836.01	0.19	-4.88
4,100.00	0.21	235.48	349.35	4,099.35	4.48 N	24.31 E	672,438.68	621,835.51	0.38	-4.40
4,200.00	0.13	210.90	449.35	4,199.35	4.28 N	24.10 E	672,438.48	621,835.30	0.11	-4.20
4,300.00	0.28	215.18	549.35	4,299.35	3.99 N	23.91 E	672,438.19	621,835.11	0.15	-3.91
4,400.00	0.27	197.62	649.35	4,399.35	3.56 N	23.69 E	672,437.76	621,834.89	0.08	-3.48

Design Report for #40 - Wellbore #1

Measured Depth (ft)	Inclination (°)	Azimuth (°)	TVD below System (ft)	Vertical Depth (ft)	Local Coordinates		Map Coordinates		Dogleg Rate (°/100ft)	Vertical Section (ft)
					Northing (ft)	Easting (ft)	Northing (ft)	Easting (ft)		
4,500.00	0.38	161.94	749.35	4,499.35	3.02 N	23.73 E	672,437.22	621,834.93	0.22	-2.94
4,551.00	0.44	165.90	800.35	4,550.35	2.67 N	23.83 E	672,436.87	621,835.03	0.13	-2.59
Last Gyro at 4,551' MD										
4,575.00	0.48	156.99	824.35	4,574.35	2.49 N	23.89 E	672,436.69	621,835.09	0.34	-2.41
4,607.00	4.86	205.36	856.31	4,606.31	1.14 N	23.36 E	672,435.34	621,834.56	14.24	-1.06
4,639.00	11.22	189.62	887.98	4,637.98	3.16 S	22.26 E	672,431.04	621,833.46	20.85	3.23
4,671.00	16.86	184.58	919.01	4,669.01	10.86 S	21.36 E	672,423.34	621,832.56	18.02	10.93
4,702.00	23.09	185.59	948.13	4,698.13	21.40 S	20.41 E	672,412.80	621,831.61	20.13	21.47
4,734.00	26.60	190.48	977.17	4,727.17	34.70 S	18.50 E	672,399.50	621,829.70	12.70	34.76
4,766.00	30.96	200.75	1,005.23	4,755.23	49.45 S	14.27 E	672,384.75	621,825.47	20.56	49.50
4,797.00	37.51	197.88	1,030.84	4,780.84	65.91 S	8.54 E	672,368.29	621,819.74	21.76	65.94
4,829.00	44.53	194.86	1,054.97	4,804.97	86.06 S	2.67 E	672,348.14	621,813.87	22.79	86.07
4,861.00	52.17	191.52	1,076.23	4,826.23	109.32 S	2.74 W	672,324.88	621,808.46	25.11	109.31
4,892.00	59.97	189.31	1,093.52	4,843.52	134.60 S	7.37 W	672,299.60	621,803.83	25.84	134.58
4,924.00	67.77	187.22	1,107.60	4,857.60	163.01 S	11.48 W	672,271.19	621,799.72	25.07	162.97
4,956.00	75.26	184.82	1,117.74	4,867.74	193.17 S	14.64 W	672,241.03	621,796.56	24.46	193.12
4,989.00	82.50	180.95	1,124.10	4,874.10	225.48 S	16.26 W	672,208.72	621,794.94	24.77	225.43
5,021.00	88.89	179.48	1,126.51	4,876.51	257.38 S	16.37 W	672,176.82	621,794.83	20.49	257.32
5,053.00	91.25	178.24	1,126.47	4,876.47	289.37 S	15.74 W	672,144.83	621,795.46	8.33	289.31
5,085.00	92.83	177.30	1,125.33	4,875.33	321.32 S	14.49 W	672,112.88	621,796.71	5.74	321.27
5,116.00	94.19	178.35	1,123.43	4,873.43	352.24 S	13.32 W	672,081.96	621,797.88	5.54	352.19
5,148.00	94.69	177.57	1,120.95	4,870.95	384.12 S	12.18 W	672,050.08	621,799.02	2.89	384.08
5,180.00	94.58	177.26	1,118.37	4,868.37	415.98 S	10.74 W	672,018.22	621,800.46	1.02	415.95
5,211.00	94.81	177.95	1,115.83	4,865.83	446.85 S	9.45 W	671,987.35	621,801.75	2.34	446.82
5,243.00	93.79	178.01	1,113.43	4,863.43	478.74 S	8.33 W	671,955.46	621,802.87	3.19	478.71
5,275.00	91.45	177.79	1,111.97	4,861.97	510.69 S	7.16 W	671,923.51	621,804.04	7.34	510.66
5,306.00	90.12	177.23	1,111.54	4,861.54	541.65 S	5.81 W	671,892.55	621,805.39	4.66	541.63
5,338.00	90.46	177.35	1,111.38	4,861.38	573.62 S	4.30 W	671,860.58	621,806.90	1.13	573.60
5,370.00	91.20	177.61	1,110.92	4,860.92	605.58 S	2.89 W	671,828.62	621,808.31	2.45	605.57
5,401.00	91.91	177.85	1,110.08	4,860.08	636.55 S	1.66 W	671,797.65	621,809.54	2.42	636.54
5,433.00	91.88	178.41	1,109.02	4,859.02	668.51 S	0.62 W	671,765.69	621,810.58	1.75	668.51
5,465.00	90.28	178.09	1,108.41	4,858.41	700.49 S	0.36 E	671,733.71	621,811.56	5.10	700.49
5,496.00	88.83	177.91	1,108.66	4,858.66	731.47 S	1.44 E	671,702.73	621,812.64	4.71	731.47
5,528.00	89.01	177.01	1,109.26	4,859.26	763.43 S	2.86 E	671,670.77	621,814.06	2.87	763.44
5,560.00	89.97	177.29	1,109.54	4,859.54	795.39 S	4.45 E	671,638.81	621,815.65	3.12	795.40
5,591.00	90.81	176.93	1,109.33	4,859.33	826.35 S	6.01 E	671,607.85	621,817.21	2.95	826.37
5,623.00	91.64	177.69	1,108.65	4,858.65	858.31 S	7.51 E	671,575.89	621,818.71	3.52	858.33
5,655.00	92.35	177.29	1,107.53	4,857.53	890.26 S	8.91 E	671,543.94	621,820.11	2.55	890.28
5,687.00	93.04	177.80	1,106.03	4,856.03	922.19 S	10.28 E	671,512.01	621,821.48	2.68	922.22
5,718.00	93.39	178.69	1,104.29	4,854.29	953.13 S	11.23 E	671,481.07	621,822.43	3.08	953.16
5,750.00	93.64	179.55	1,102.33	4,852.33	985.06 S	11.72 E	671,449.14	621,822.92	2.79	985.10
5,782.00	93.63	179.52	1,100.30	4,850.30	1,017.00 S	11.98 E	671,417.20	621,823.18	0.10	1,017.03
5,813.00	94.05	179.97	1,098.22	4,848.22	1,047.93 S	12.12 E	671,386.27	621,823.32	1.98	1,047.96
5,845.00	94.34	180.43	1,095.88	4,845.88	1,079.84 S	12.01 E	671,354.36	621,823.21	1.70	1,079.88
5,877.00	92.93	181.17	1,093.85	4,843.85	1,111.77 S	11.56 E	671,322.43	621,822.76	4.97	1,111.81

HALLIBURTON**Design Report for #40 - Wellbore #1**

Measured Depth (ft)	Inclination (°)	Azimuth (°)	TVD below System (ft)	Vertical Depth (ft)	Local Coordinates		Map Coordinates		Dogleg Rate (°/100ft)	Vertical Section (ft)
					Northing (ft)	Easting (ft)	Northing (ft)	Easting (ft)		
5,909.00	92.96	181.09	1,092.21	4,842.21	1,143.73 S	10.93 E	671,290.47	621,822.13	0.27	1,143.76
5,940.00	93.51	181.09	1,090.46	4,840.46	1,174.67 S	10.34 E	671,259.53	621,821.54	1.77	1,174.70
5,972.00	94.19	181.14	1,088.31	4,838.31	1,206.59 S	9.72 E	671,227.61	621,820.92	2.13	1,206.62
6,004.00	93.73	180.79	1,086.10	4,836.10	1,238.51 S	9.18 E	671,195.69	621,820.38	1.80	1,238.53
6,035.00	93.54	180.37	1,084.14	4,834.14	1,269.45 S	8.87 E	671,164.75	621,820.07	1.48	1,269.47
6,067.00	94.04	180.45	1,082.02	4,832.02	1,301.38 S	8.64 E	671,132.82	621,819.84	1.58	1,301.40
6,099.00	93.95	180.46	1,079.79	4,829.79	1,333.30 S	8.39 E	671,100.90	621,819.59	0.28	1,333.32
6,130.00	93.79	181.09	1,077.70	4,827.70	1,364.22 S	7.97 E	671,069.98	621,819.17	2.09	1,364.24
6,162.00	93.20	181.51	1,075.75	4,825.75	1,396.16 S	7.24 E	671,038.04	621,818.44	2.26	1,396.17
6,194.00	92.32	181.33	1,074.21	4,824.21	1,428.11 S	6.45 E	671,006.09	621,817.65	2.81	1,428.12
6,226.00	91.85	180.71	1,073.04	4,823.04	1,460.08 S	5.88 E	670,974.12	621,817.08	2.43	1,460.09
6,257.00	92.44	180.51	1,071.88	4,821.88	1,491.06 S	5.55 E	670,943.14	621,816.75	2.01	1,491.07
6,289.00	92.76	180.32	1,070.43	4,820.43	1,523.02 S	5.32 E	670,911.18	621,816.52	1.16	1,523.03
6,321.00	92.65	180.03	1,068.92	4,818.92	1,554.99 S	5.22 E	670,879.21	621,816.42	0.97	1,555.00
6,352.00	93.06	180.22	1,067.38	4,817.38	1,585.95 S	5.16 E	670,848.25	621,816.36	1.46	1,585.96
6,384.00	92.96	180.19	1,065.70	4,815.70	1,617.91 S	5.04 E	670,816.29	621,816.24	0.33	1,617.91
6,416.00	93.05	180.13	1,064.02	4,814.02	1,649.86 S	4.95 E	670,784.34	621,816.15	0.34	1,649.87
6,447.00	93.07	179.39	1,062.37	4,812.37	1,680.82 S	5.08 E	670,753.38	621,816.28	2.38	1,680.82
6,479.00	93.47	179.31	1,060.54	4,810.54	1,712.76 S	5.44 E	670,721.44	621,816.64	1.27	1,712.77
6,511.00	93.86	179.18	1,058.49	4,808.49	1,744.69 S	5.87 E	670,689.51	621,817.07	1.28	1,744.70
6,543.00	93.30	179.05	1,056.50	4,806.50	1,776.63 S	6.36 E	670,657.57	621,817.56	1.80	1,776.64
6,574.00	92.37	178.57	1,054.96	4,804.96	1,807.58 S	7.00 E	670,626.62	621,818.20	3.38	1,807.60
6,606.00	92.13	178.26	1,053.71	4,803.71	1,839.55 S	7.89 E	670,594.65	621,819.09	1.22	1,839.56
6,638.00	91.79	178.48	1,052.61	4,802.61	1,871.51 S	8.80 E	670,562.69	621,820.00	1.27	1,871.53
6,669.00	92.07	178.26	1,051.57	4,801.57	1,902.48 S	9.68 E	670,531.72	621,820.88	1.15	1,902.51
Last MWD at 6,669' MD										
6,745.00	92.07	178.26	1,048.82	4,798.82	1,978.40 S	11.98 E	670,455.80	621,823.18	0.00	1,978.43
Projection to TD at 6,745' MD										

Design Annotations

Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates		Comment
		+N/-S (ft)	+E/-W (ft)	
4,551.00	4,550.35	2.67	23.83	Last Gyro at 4,551' MD
6,669.00	4,801.57	-1,902.48	9.68	Last MWD at 6,669' MD
6,745.00	4,798.82	-1,978.40	11.98	Projection to TD at 6,745' MD

Vertical Section Information

Angle Type	Target	Azimuth (°)	Origin Type	Origin		Start TVD (ft)
				+N/-S (ft)	+E/-W (ft)	
Target	Gissler.B.40.PBHL	179.81	Slot	0.00	0.00	0.00

HALLIBURTON**Design Report for #40 - Wellbore #1****Survey tool program**

From (ft)	To (ft)	Survey/Plan	Survey Tool
100.00	4,551.00	Gyro Survey	NS-GYRO-MS
4,575.00	6,745.00	MWD Survey	MWD

Targets

Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (ft)	Easting (ft)	Latitude	Longitude
Gissler.B.40.PBHL	0.00	0.00	4,800.00	-1,979.50	6.60	670,454.70	621,817.80	32° 50' 33.132 N	103° 56' 12.112 W
- actual wellpath misses by 5.62ft at 6745.00ft MD (4798.82 TVD, -1978.40 N, 11.98 E)									
- Point									

HALLIBURTON**North Reference Sheet for Gissler B. - #40 - Wellbore #1**

All data is in US Feet unless otherwise stated. Directions and Coordinates are relative to Grid North Reference.

Vertical Depths are relative to GL 3,738' + KB 12' @ 3750.00ft (Union ##). Northing and Easting are relative to #40

Coordinate System is US State Plane 1927 (Exact solution), New Mexico East 3001 using datum NAD 1927 (NADCON CONUS), ellipsoid Clarke 1866

Projection method is Transverse Mercator (Gauss-Kruger)

Central Meridian is 104° 20' 0.000 W°, Longitude Origin: 0° 0' 0.000 E°, Latitude Origin: 0° 0' 0.000 N°

False Easting: 500,000.00ft, False Northing: 0.00ft, Scale Reduction: 0.99992608


Grid Coordinates of Well: 672,434.20 ft N, 621,811.20 ft E

Geographical Coordinates of Well: 32° 50' 52.72" N, 103° 56' 12.10" W

Grid Convergence at Surface is: 0°

Based upon Minimum Curvature type calculations, at a Measured Depth of 6,745.00ft
the Bottom Hole Displacement is 1,978.44ft in the Direction of 179.65° (Grid).

Magnetic Convergence at surface is: -8° (14 April 2008, , BGGM2007)

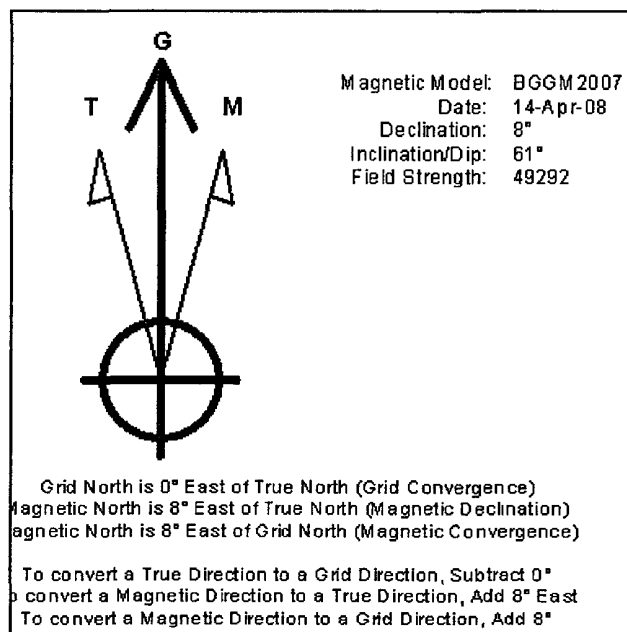

DRILLING CONTRACTOR *United Drilling, Inc.*

128-08