

MEWBOURNE OIL COMPANY

701 S. CECIL
PO BOX 5270
HOBBS, NM 88240
(575) 393-5905
(575) 397-6252 FAX



AUG - 1 2008
OCD-ARTESIA

July 30, 2008

OIL CONSERVATION DIVISION
1301 W. GRAND AVE
ARTESIA NM 88210

Please find enclosed attachments left out of our C-144 for the Dos Hermanos 6 Federal
#1. API #30-015-36402.

Thank you,

Charles Martin
Engineer

On the 10th day of April, 2008 Mewbourne Oil Co. visually inspected the Das Hermanas 6 Federal #1 location in Unit Letter C of Sec 6, T21 S, R29 E, of Eddy County, NM with the API # 30-015-36402.

This is to certify that upon visual inspection of the above mentioned location there are no permanent residences, schools, hospitals, institutions or churches within 300 feet. The location is not within 500 feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, nor within 1000 horizontal feet of any other fresh water well or spring, nor within 500 feet of a wetland, nor within 300 feet of a continuously flowing water course, nor within 200 feet of any other significant watercourse or lakebed, sinkhole or playa lake (measured from the ordinary high-water mark).

Signature: Charles J. Meets

Date: 7-30-08

VI. CONSTRUCTION

A. NOTIFICATION

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Carlsbad Field Office at (505) 234-5972 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved APD and Conditions of Approval (COA) on the well site and they shall be made available upon request by the Authorized Officer.

B. TOPSOIL

The operator shall stockpile the topsoil of the well pad. The topsoil to be stripped is approximately 8 inches in depth. The topsoil shall not be used to backfill the reserve pit and will be used for interim and final reclamation.

C. RESERVE PITS

The reserve pit shall be constructed and closed in accordance with the NMOCD rules.

The reserve pit shall be constructed 100' X 100' on the West side of the well pad.


The reserve pit shall be constructed, so that upon completion of drilling operations, the dried pit contents shall be buried a minimum depth of three feet below ground level. Should the pit content level not meet the three foot minimum depth requirement, the excess contents shall be removed until the required minimum depth of three feet below ground level has been met. The operator shall properly dispose of the excess contents at an authorized disposal site.

The reserve pit shall be constructed and maintained so that runoff water from outside the location is not allowed to enter the pit. The berms surrounding the entire perimeter of the pit shall extend a minimum of two (2) feet above ground level. At no time will standing fluids in the pit be allowed to rise above ground level.

The reserve pit shall be fenced on three (3) sides during drilling operations. The fourth side shall be fenced immediately upon rig release.

D. FEDERAL MINERAL MATERIALS PIT

If the operator elects to surface the access road and/or well pad, mineral materials extracted during construction of the reserve pit may be used for surfacing the well pad and access road and other facilities on the lease.

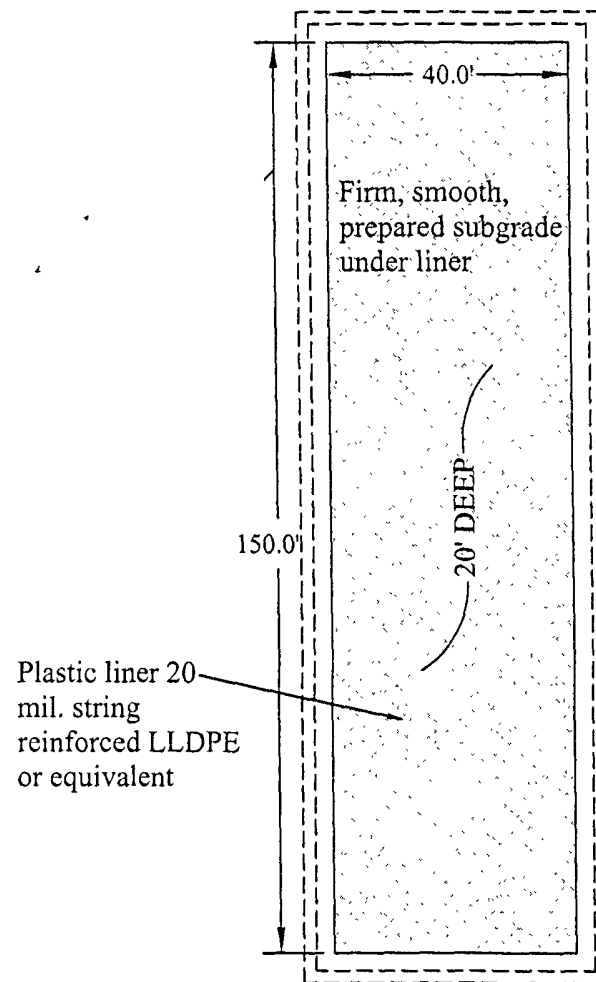

Site Overhead View



Date: 07/22/2008

Scale: Not To Scale

Drawn By: SJA

Mewbourne Oil Company
Bradley 6 Federal 1
Eddy County, New Mexico
Pit Liner Site Plain

On-Site Closure Plan

- **Siting Criteria:** See attachments.
- **Proof of Surface Owner Notice:** See attached letter that has been sent to land owner.
- **Construction/Design Plan of Burial Trench:** See attachment.
- **Burial Trench:** In compliance with 19.15.17.13 NMAC, material from temporary pit will be stiffened with a maximum 3:1 ratio and placed in a lined 20mil burial trench with approximate dimensions of 150x40x20. A 20mil lid will be placed on top of the burial cell to seal in the impacted material. Upon excavation all applicable soil testing will be performed pursuant to Pit Rule 17 to verify the limits set by the NMOCD have been obtained. A copy of the analytical data will be attached to the Final Report.
- **Sampling Plan:** In compliance with Subsection F of 19.15.17.13 NMAC a five point composite sample will be taken from the floor of the excavation and the burial contents.
- **Soil Cover Design:** In compliance with Subsection H of 19.15.17.13 NMAC three foot of native material will be placed over the burial trench and the excavated pit area with one foot of top soil to ensure re-vegetation.
- **Re-vegetation Plan:** In compliance with Subsection I of 19.15.17.13 NMAC the area will be re-seeded with native vegetation.
- **Site Reclamation Plan:** In compliance with Subsection I of 19.15.17.13 NMAC the impacted and disturbed area will be re-contoured to surrounding terrain.
- **Marker:** Mewbourne Oil Company requests an exception to the placement of the permanent marker. It is of our opinion that the permanent marker will be better served if it is placed at the corner of the burial cell in native undisturbed soil rather than in the center of the burial area. In the area of the burial cell the material is not as compact and we feel could pose future problems with the stability of the permanent marker. The permanent marker will have all required information permanently listed on it.
- **Deed:** In compliance with 19.15.17.13 NMAC a deed will be filed with the county clerk and an approved copy will be attached to the final report.