

Submit 3 Copies To Appropriate District Office
 District I
 1625 N French Dr, Hobbs, NM 88240
 District II
 1301 W. Grand Ave, Artesia, NM 88210
 District III
 1000 Rio Brazos Rd, Aztec, NM 87410
 District IV
 1220 S St Francis Dr, Santa Fe, NM 87505

State of New Mexico
 Energy, Minerals and Natural Resources

Form C-103
 June 19, 2008

OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505



WELL API NO. 30-015-21254
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No. EG 1443
7. Lease Name or Unit Agreement Name STATE 16
8. Well Number 001
9. OGRID Number 002175
10. Pool name or Wildcat FRONTIER HILS-STRAWN GAS POOL
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3352 GL

SUNDRY NOTICES AND REPORTS ON WELLS
 (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS)

1. Type of Well: Oil Well Gas Well Other

2. Name of Operator
BETTIS, BOYLE & STOVALL

3. Address of Operator
P.O. BOX 1240, GRAHAM, TX 76450

4. Well Location
 Unit Letter O : 660 feet from the SOUTH line and 1980 feet from the EAST line
 Section 16 Township 23S Range 26E NMPM EDDY County

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

- PERFORM REMEDIAL WORK PLUG AND ABANDON
 TEMPORARILY ABANDON CHANGE PLANS
 PULL OR ALTER CASING MULTIPLE COMPL
 DOWNHOLE COMMINGLE

OTHER:

SUBSEQUENT REPORT OF:

- REMEDIAL WORK ALTERING CASING
 COMMENCE DRILLING OPNS. P AND A
 CASING/CEMENT JOB

OTHER:

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

WELLBORE SCHEMATIC ATTACHED - BETTIS, BOYLE & STOVALL PROPOSES TO PLUG THE WELL AS FOLLOWS:

- SET CIBP @ 10,000' WITH 5 SXS CEMENT *35' min.*
- LOAD HOLE WITH MUD.
- CUT & PULL 4-1/2" CASING @ +/- 8,000'.
- SPOT 35 SX CEMENT 50' IN AND OUT OF STUB AND TAG.
- SPOT 35 SX CEMENT @ 6,800'.
- SPOT 35 SX CEMENT @ 5,300'.
- SPOT 45 SX CEMENT @ 2,800' AND TAG.
- SPOT 35 SX. CEMENT @ 650'. *TAG*
- SPOT 10 SX CEMENT SURFACE PLUG. - *60' min*
- CLEAN UP AND PERFORM SURFACE RESTORATION.

**Notify OCD 24 hrs. prior
 To any work done.**

Approval Granted providing work
 is complete by 1/29/08

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

Kim Ligon

TITLE

REGULATORY ANALYST

DATE 10/16/2008

Type or print name
 For State Use Only

KIM LIGON

E-mail address: kligon@bbsoil.com

PHONE: 940-549-0780

APPROVED BY:

Pho Harker

TITLE

Field Rep

DATE

10/29/08

Conditions of Approval (if any):

BETTIS, BOYLE : STOUALL

#1 STATE "16"

EDDY COUNTY, N. MEXICO

PROPOSED PLUGGING PROCEDURE

13-782 500 SHEETS FULLER 8 SQUARE
42-381 50 SHEETS EYE-LASER 8 SQUARE
42-382 100 SHEETS EYE-LASER 8 SQUARE
42-383 100 SHEETS EYE-LASER 8 SQUARE
42-384 100 RECYCLED WHITE 8 SQUARE
42-385 200 RECYCLED WHITE 8 SQUARE
MADE IN U.S.A.



13 3/8 csg @ 594

CMT'D W/ 800 SX
TO SURF

12 1/4" HOLE

8 5/8" csg @ 2754

CMT'D TO SURF
W/ 1350 SX

CUT 4 1/2" @ 8000'

★ SET CIBP @ 10000'
W/ 5 SX CMT' ON TOP

Perfs: 10,392 - 10,412


Perfs: 10,938 - 10,950

4 1/2" csg @ 11712' CMT'D
W/ 180 SX

- PROPOSED OPEN HOLE PLUGS
- (1) 35 SX @ IN/OUT OF STUB @ 8000' TAG
 - (2) 35 SX @ 6800'
 - (3) 35 SX @ 5300'
 - (4) 45 SX @ 2800' TAG
 - (5) 35 SX @ 6.50 TAG
 - (6) 10 SX @ SURFACE 60' MIN

TOC @ 9300'
CBL

CIBP @ 11,020

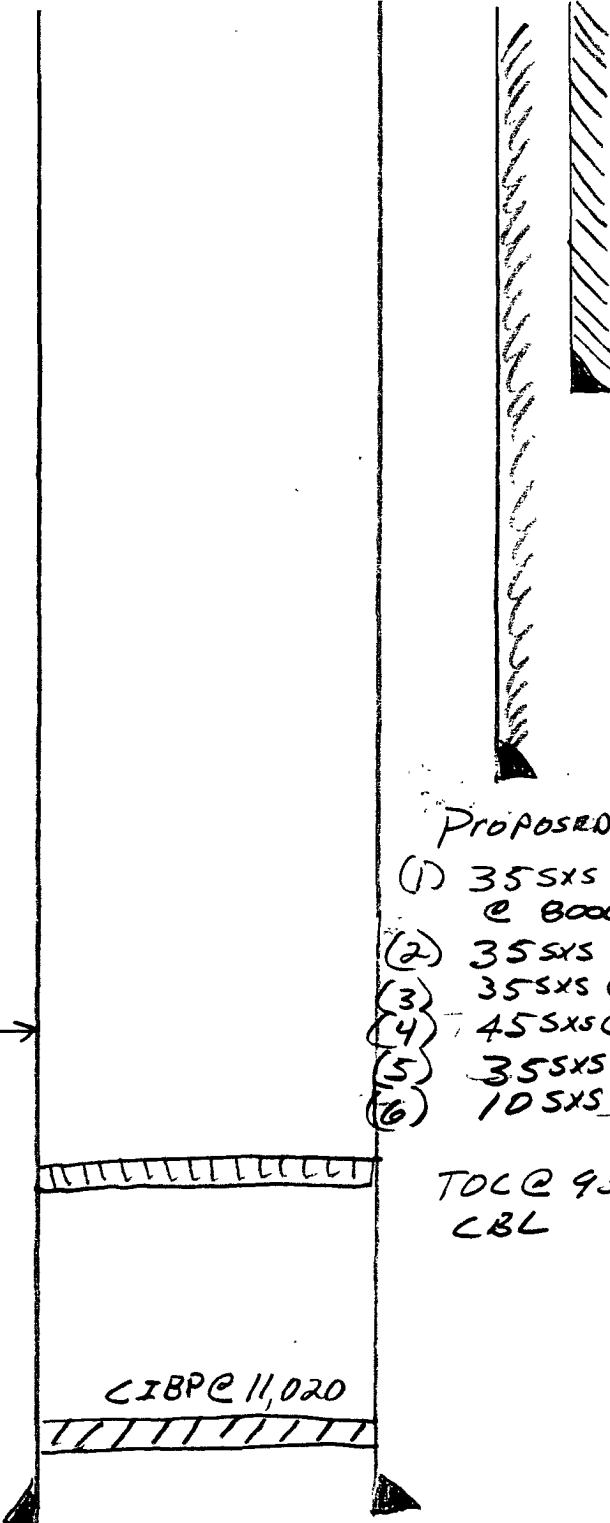

BETTIS, BOYLE: STOUALL

#1 STATE "16"

EDDY COUNTY, N MEXICO

CURRENT
WELL BORE DIAGRAM

17 1/2" HOLE

13 3/8" CSG @ 594'
CMT'D W/ 900 SXS
TO SURFACE

12 1/4" HOLE

8 5/8" CSG @ 7754'
CMT'D W/ 1350 SXS
CMT TO SURF

PERFS: 10,392 - 10,412

PERFS: 10,938 - 10,990

CMT'D W/ 180 SXS
4 1/2" CSG @ 11,712'

TOCC @ 4/9300'
BASED ON CBL

CIBP @ 10,020
7 7/8" HOLE

