

Submit 3 Copies To Appropriate District  
Office  
District I  
1625 N. French Dr., Hobbs, NM 87240  
District II  
1301 W. Grand Ave., Artesia, NM 88210  
District III  
1000 Rio Brazos Rd., Aztec, NM 87410  
District IV  
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico  
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

NOV 21 2008

Form C-103

OCD-ARTESIA

May 27, 2004

WELL API NO. 30-015-31610
5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name: Davis 18
8. Well Number 2
9. OGRID Number 16696
10. Pool name or Wildcat McMillan Morrow

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/>	7. Lease Name or Unit Agreement Name: Davis 18
2. Name of Operator OXY USA Inc.	8. Well Number 2
3. Address of Operator P.O. Box 50250 Midland, TX 79710-0250	9. OGRID Number 16696
4. Well Location Unit Letter <u>L</u> : <u>1819</u> feet from the <u>south</u> line and <u>747</u> feet from the <u>west</u> line Section <u>18</u> Township <u>20S</u> Range <u>27E</u> NMPM County <u>Eddy</u>	10. Pool name or Wildcat McMillan Morrow
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3299'	
Pit or Below-grade Tank Application <input type="checkbox"/> or Closure <input type="checkbox"/>	
Pit type _____ Depth to Groundwater _____ Distance from nearest fresh water well _____ Distance from nearest surface water _____	
Pit Liner Thickness: _____ mil Below-Grade Tank: Volume _____ bbls; Construction Material _____	

12. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒  
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐  
PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐  
OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐  
COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐  
CASING TEST AND CEMENT JOB ☐  
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

**Notify OCD 24 hrs. prior  
to any work done.**

See Attachment

Approval Granted providing work  
is complete by 2/24/09

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOC guidelines ☐ , a general permit ☐ or an (attached) alternative OCD-approved plan ☐

SIGNATURE David Stewart TITLE Sr. Regulatory Analyst DATE 11/18/08  
E-mail address: david\_stewart@oxy.com  
Type or print name David Stewart Telephone No. 432-685-5717

For State Use Only

APPROVED BY Phil Hankin TITLE CO DATE 11/24/08  
Conditions of Approval, if any:

TD-10550' PBTD-8165' Perfs-8250-8880' 10344-10364' CIBP-8200' 10310'

13-3/8" 54.5# csg @ 515' w/660sx, 17-1/2" hole, TOC-Surf-Circ

9-5/8" 40# @ 3015' w/ 1070sx, 12-1/4" hole, TOC-Surf-Circ

7" 29# csg @ 9000' w/1110sx, 7-7/8" hole, TOC-6950'-CBL

5" 18# liner @ 8904-10538' w/ 300sx, 6-1/8" hole, TOC-8904'-Circ

1. RIH & Tag Cmt\CIBP @ 8165' M&P 25sx cmt

2. M&P 35sx cmt @ 7885-7785'

3. Cut & Pull 7" csg @ +/- 6850'

4. M&P 45sx cmt @ 6900-6800' WOC-Tag

5. M&P 60sx cmt @ 4950-4850' WOC-Tag

6. M&P 55sx cmt @ 3065-2965' WOC-Tag

7. M&P 45sx cmt @ 1600-1500'

8. M&P 45sx cmt @ 565-465' ~ TAG

9. M&P 45sx cmt @ 100' to Surface

10# MLF between plugs


OXY USA Inc.  
Davis 18 #2  
API No. 30-015-31610

45sx @ 100'-Surface

45sx @ 565-465' - TAG

45sx @ 1600-1500'


55sx @ 3065-2965' - TAG

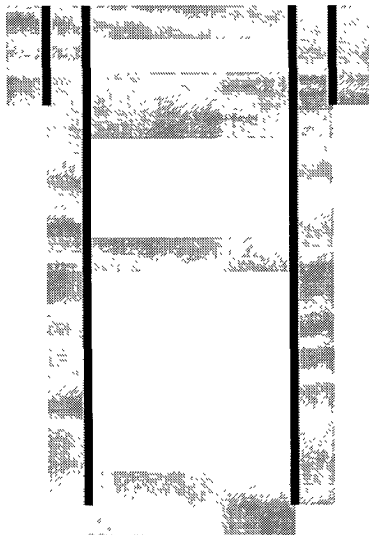

17-1/2" hole @ 515'  
13-3/8" csg @ 515'  
w/ 660sx-TOC-Surf-Circ

12-1/4" hole @ 3015'  
9-5/8" csg @ 3015'  
w/ 1070sx-TOC-Surf-Circ

60sx @ 4950-4850' WOC-Tag




45sx @ 6900-6800' WOC-Tag

35sx @ 7885-7785'

25sx @ 8165-8065'

7/01-CIBP @ 8200' w/ 35' cmt

7/01-CIBP @ 10310' w/ 40' cmt

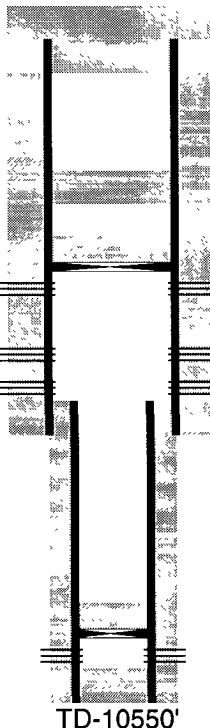

Cut & Pull 7" csg @ +/- 6850'

Perfs @ 8250-8265'  
Perfs @ 8714-8760'  
Perfs @ 8840-8880'

8-1/2" hole @ 9000'  
7" csg @ 9000'  
w/ 1110sx-TOC-6950'-CBL

6-1/8" hole @ 10550'  
5" liner @ 8904-10538'  
w/ 300sx-TOC-8904'-Circ

Perfs @ 10344-10364'

TD-10550'

OXY USA Inc.  
Davis 18 #2  
API No. 30-015-31610

