

District I

1625 N. French Dr., Hobbs, NM 88240

District II

1301 W Grand Ave., Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

FEB - 2 2009

Form C-103
June 19, 2008

WELL API NO. 30-015-26250
5. Indicate Type of Lease: STATE ☐ FEE ☒
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name Foster FF Com
8. Well Number 2
9. OGRID Number 025575
10. Pool name or Wildcat Dagger Draw Upper Penn, North

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator
Yates Petroleum Corporation

3. Address of Operator
105 South Fourth Street, Artesia, NM 88210

4. Well Location
Unit Letter L : 1855 feet from the South line and 660 feet from the West line
Section 1 Township 20S Range 24E NMPM Eddy County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3605' GR

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Yates Petroleum Corporation plans to plug and abandon this well as follows:

1. MI RU WSU and safety equipment as needed. POOH with production equipment if any exist.
2. Set a 7" CIBP at 7658' with 35' cement on top.
3. Spot a 45 sx cement plug across the DV tool and the Wolfcamp top from 5380'-5547'.
4. Spot a 150' (25 sx) cement plug across the Bone Spring from 3234'-3384'.
5. Spot a 150' (25 sx) cement plug across the Yeso from 2082'-2232'.
6. Spot a 150' (25 sx) cement plug from 1234'-1384' across the casing shoe. WOC and tag plug.
7. Spot a 150' (25 sx) cement plug from 0'-150'. WOC and tag plug.
8. Cut off wellhead and install dry hole marker as per regulations and clean up location.

Approval Granted providing work
is complete by 5/3/09

NOTE: Yates Petroleum Corporation will use steel pits and no earth pits

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Tina Huerta TITLE Regulatory Compliance Supervisor DATE January 29, 2009

Type or print name Tina Huerta E-mail address: tinah@yatespetroleum.com PHONE: 575-748-4168

For State Use Only

APPROVED BY: [Signature] TITLE Compliance DATE 2/3/09


Conditions of Approval (if any):

WELL NAME: Foster FF #2 **FIELD:** Dagger Draw
LOCATION: 1,855' FSL & 660' FWL of Section 1-20S-24E Eddy Co., NM
GL: 3,605' **ZERO:** 14' **KB:** 3,619
SPUD DATE: 11/28/04 **COMPLETION DATE:** _____
COMMENTS: API No.: 30-015-26250

CASING PROGRAM

9-5/8" 36# J55 STC		1,298'
7" 26# J55	210'	
7" 23# N80	463'	
7" 23# J55	4,992'	
7" 23 N80	1,046	
7" 26E	1,329'	8040'

Before

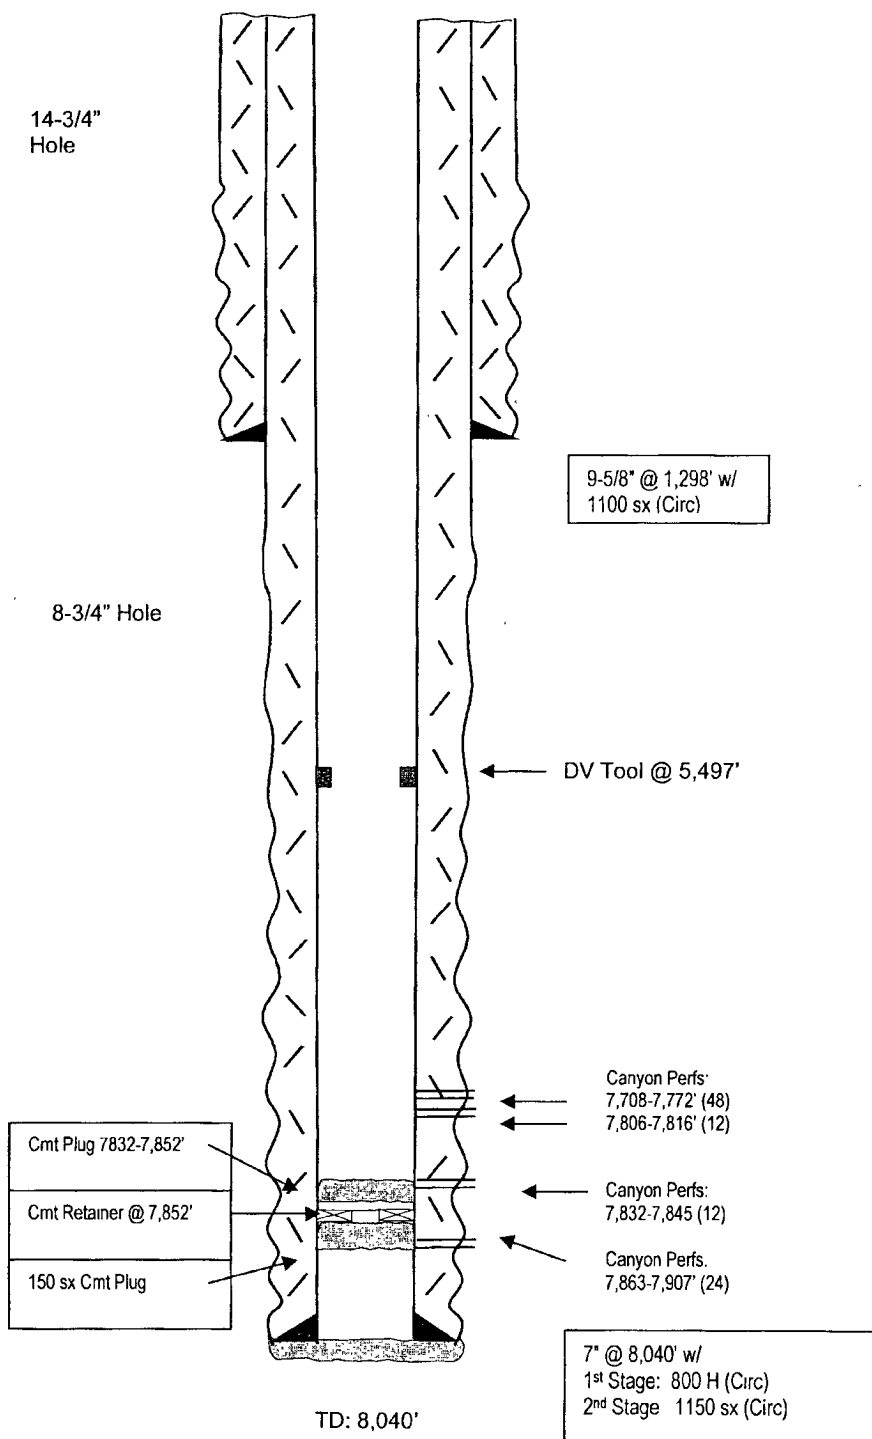

TOPS

SA 542'
 Yeso 2,182'
 BS Lm 3,334'
 WC Lm Md 5,430'
 Canyon Lm 7,564'


Not to Scale
 1/11/07
 DC/Moss

WELL NAME: Foster FF #2 **FIELD:** Dagger Draw
LOCATION: 1,855' FSL & 660' FWL of Section 1-20S-24E Eddy Co., NM
GL: 3,605' **ZERO:** 14' **KB:** 3,619
SPUD DATE: 11/28/04 **COMPLETION DATE:** _____
COMMENTS: API No.: 30-015-26250

CASING PROGRAM

9-5/8" 36# J55 STC		1,298'
7" 26# J55	210'	
7" 23# N80	463'	
7" 23# J55	4,992'	
7" 23 N80	1,046	
7" 26E	1,329'	8040'

After

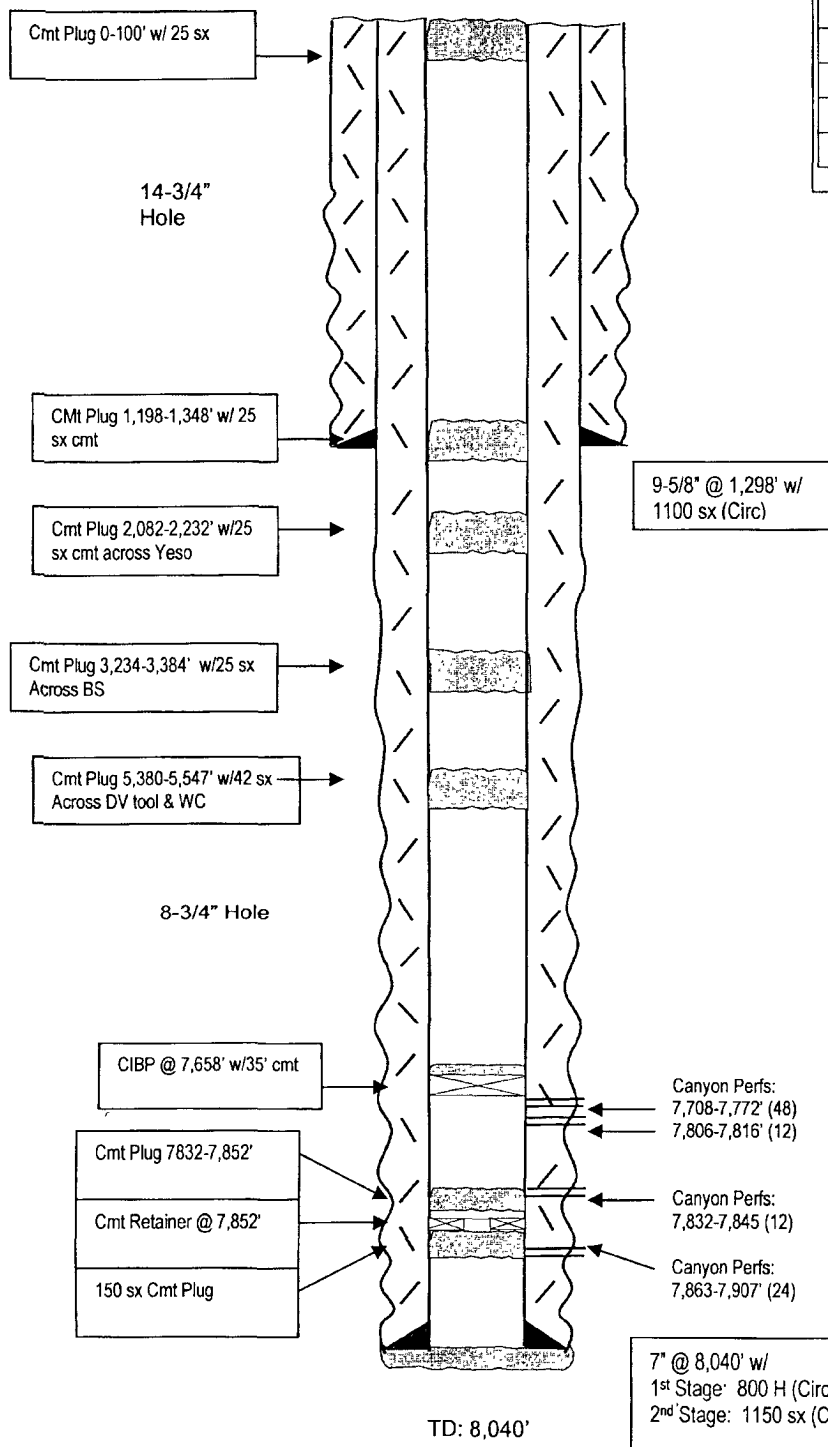

TOPS

SA 542'
 Yeso 2,182'
 BS Lm 3,334'
 WC Lm Md 5,430'
 Canyon Lm 7,564'

Not to Scale
 1/11/07
 Hill/DC