

Submit 3 Copies To Appropriate District
Office
District I
1625 N French Dr , Hobbs, NM 87240
District II
1301 W. Grand Ave , Artesia, NM 88210
District III
1000 Rio Brazos Rd , Aztec, NM 87410
District IV
1220 S. St Francis Dr , Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

APR 23 2009

Form C-103
May 27, 2004

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-015-23752
1. Type of Well: Oil Well <input type="checkbox"/> Gas Well <input checked="" type="checkbox"/> Other		5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
2. Name of Operator OXY USA Inc.		6. State Oil & Gas Lease No.
3. Address of Operator P.O. Box 50250 Midland, TX 79710-0250		7. Lease Name or Unit Agreement Name: Marra
4. Well Location Unit Letter <u>C</u> : <u>660</u> feet from the <u>north</u> line and <u>1980</u> feet from the <u>west</u> line Section <u>14</u> Township <u>24S</u> Range <u>28E</u> NMPM County <u>Eddy</u>		8. Well Number 1
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 2988' GL		9. OGRID Number 16696
10. Pool name or Wildcat Malaga Atoka		
Pit or Below-grade Tank Application <input type="checkbox"/> or Closure <input type="checkbox"/> Pit type _____ Depth to Groundwater _____ Distance from nearest fresh water well _____ Distance from nearest surface water _____ Pit Liner Thickness: _____ mil Below-Grade Tank: Volume _____ bbls; Construction Material _____		

12. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐
OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐
CASING TEST AND CEMENT JOB ☐
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

See Attachment

Notify OCD 24 hrs. prior
To any work done.

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐ , a general permit ☐ or an (attached) alternative OCD-approved plan ☐

SIGNATURE David Stewart TITLE Sr. Regulatory Analyst DATE 4/22/09

Type or print name David Stewart

E-mail address:

david_stewart@oxy.com

Telephone No. 432-685-5717

For State Use Only

APPROVED BY David Stewart

TITLE

Approval Granted providing work
is complete by 3/27/09

DATE

4/27/09


Conditions of Approval, if any:

TD-12880' PBTD-11950' Perfs-1718-11793' CIBP-12000'

20" 94# csg @ 401' w/ 710sx, 26" hole, TOC-Surf-Circ
13-3/8" 54.5-61# @ 2631' w/ 1800sx, 17-1/2" hole, TOC-Surf-Circ
9-5/8" 40-43.5# @ 9817' w/ 1100sx, DVT @ 5787' 12-1/4" hole, TOC-5601'-Calc
7-5/8" 39# liner @ 9506-11999' w/ 525sx, 8-1/2" hole, TOC-9506'-Sqz
5" 18# liner @ 11820-12879' w/ 150sx, 6-1/2" hole, TOC-11820'-Circ

1. M&P 35sx cmt @ 11650-11550' WOC-Tag
2. M&P 35sx cmt @ 9867-9767'
3. M&P 45sx cmt @ 9556-9456' WOC-Tag
4. M&P 50sx cmt @ 7300-7200'
5. M&P 50sx cmt @ 6500-6400'
6. M&P 50sx cmt @ 5837-5737'
7. Perf @ 3500' sqz 90sx cmt to 3400' WOC-Tag
8. Perf @ 2681' sqz 95sx cmt to 2581' WOC-Tag
9. Perf @ 451' sqz 95sx cmt to 351' WOC-Tag
10. Perf @ 100' sqz 95sx cmt to Surface
Circ 10# MLF between plugs

OXY USA Inc.
Marra #1
API No. 30-015-23752

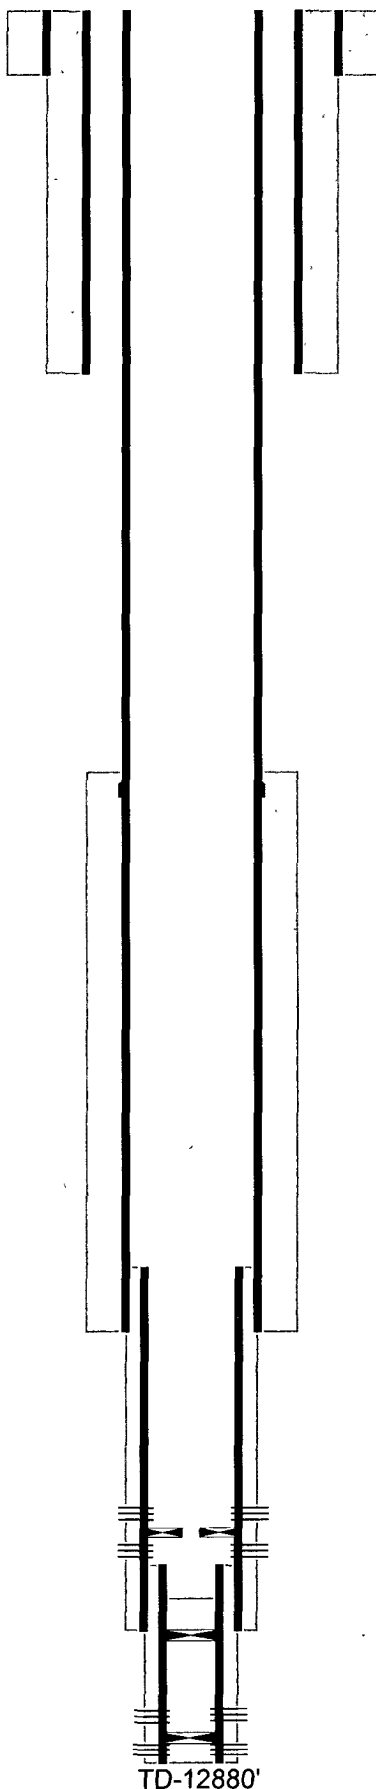

26" hole @ 401'
20" csg @ 401'
w/ 710sx-TOC-Surf-Circ

17-1/2" hole @ 2631'
13-3/8" csg @ 2631'
w/ 1800sx-TOC-Surf-Circ

12-1/4" hole @ 9817'
9-5/8" csg @ 9817'
w/ 1100sx-TOC-5601'-Calc
DVT @ 5787'

8-1/2" hole @ 11999'
75/8" liner @ 9506-11999'
w/ 525sx-TOC-9506'-Sqz

Perfs @ 11718-11724'
Perfs @ 11786-11793'

6-1/2" hole @ 12880'
5" liner @ 11820-12879'
w/ 150sx-TOC-11820'-Circ

Perfs @ 12402-12578'
Perfs @ 12672-12724'

Guib D Pkr @ 11755' w/ mill out ext

9/82-CIBP @ 12000' w/ 50' cmt

CIBP @ 12660'

TD-12880'

OXY USA Inc. - Proposed
Marra #1
API No. 30-015-23752

95sx @ 100-Surface

95sx @ 451-351' WOC-Tag

95sx @ 2681-2581' WOC-Tag

90sx @ 3500-3400' WOC-Tag

50sx @ 5837-5737'

50sx @ 6500-6400'

50sx @ 7300-7200'

45sx @ 9556-9456' WOC-Tag


35sx @ 9867-9767'

35sx @ 11650-11550' WOC-Tag

Guib D Pkr @ 11755' w/ mill out ext

9/82-CIBP @ 12000' w/ 50' cmt

CIBP @ 12660'

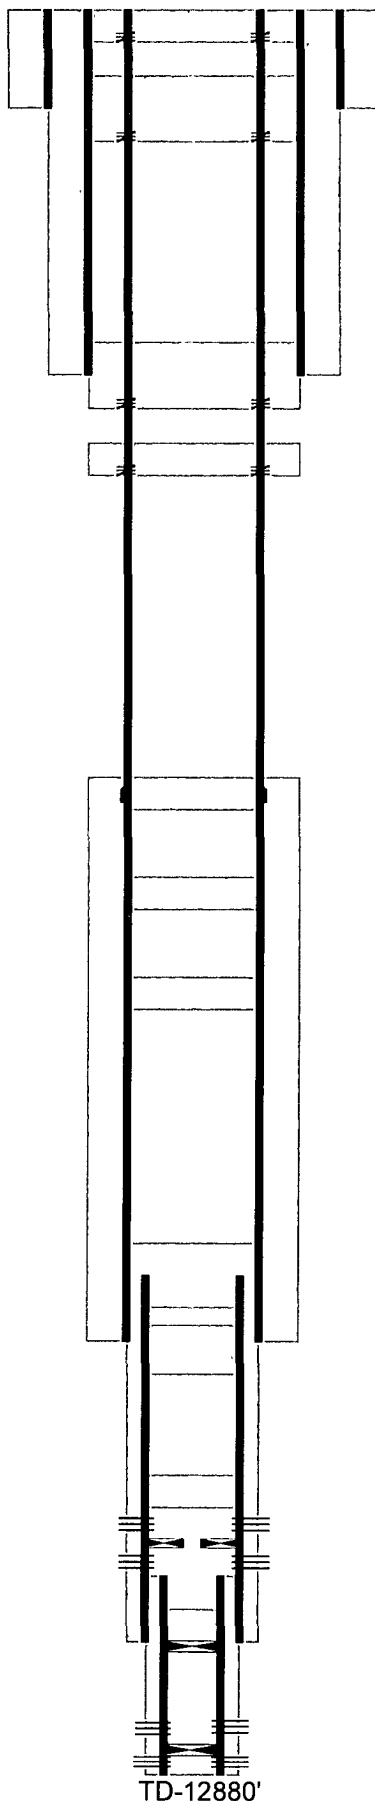

Perf @ 100'

Perf @ 451'

Perf @ 2681'

Perf @ 3500'

26" hole @ 401'
20" csg @ 401'
w/ 710sx-TOC-Surf-Circ

17-1/2" hole @ 2631'
13-3/8" csg @ 2631'
w/ 1800sx-TOC-Surf-Circ

12-1/4" hole @ 9817'
9-5/8" csg @ 9817'
w/ 1100sx-TOC-5601'-Calc
DVT @ 5787'

8-1/2" hole @ 11999'
75/8" liner @ 9506-11999'
w/ 525sx-TOC-9506'-Sqz

Perfs @ 11718-11724'
Perfs @ 11786-11793'

6-1/2" hole @ 12880'
5" liner @ 11820-12879'
w/ 150sx-TOC-11820'-Circ

Perfs @ 12402-12578'
Perfs @ 12672-12724'

TD-12880'