

Submit 3 Copies To Appropriate District
Office
District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
June 16, 2008

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.,
Santa Fe, NM 87505

WELL API NO. 30-015-36730
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name
Spud 16 State
8. Well Number 8H
9. OGRID Number 6137
10. Pool name or Wildcat Harroun Ranch, Delaware, NE

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A
DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH
PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other

2. Name of Operator Devon Energy Production Company L.P.

3. Address of Operator 20 North Broadway, Oklahoma City, OK 73102-8260

4. Well Location

Unit Letter D 523 feet from the North line and 665 feet from the West line
Section 16 Township 23S Range 29E NMPM Eddy County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
2971' GL

RECEIVED

NOV 16 2009

NMOCD ARTESIA

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐

OTHER: Rig Change

☒

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER:

☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Devon Energy Production Company L. P. respectfully requests to change the rig layout from Nabors M-41 to the H & P Rig #214 to drill this well and requests a variance that a co-flex hose may be used between the BOP and the choke manifold. The hose will be kept as straight as possible with minimal turns. CO-Flex Hose Manufacturer: Phoenix Beattie; ~33' (11.43 meters) of co-flex line; 3" coupling w/ 4 1/16" flange on each end - 10,000 psi; Quality Control Inspection & Test Certificate attached; see configuration schematic. Safety clamps are not required since the ends are flanged.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.



SIGNATURE Judy A. Barnett TITLE Regulatory Analyst DATE 11/12/09

Type or print name Judy A. Barnett E-mail address: _____ PHONE: _____

For State Use Only

APPROVED BY: [Signature] TITLE Geologist DATE 11/17/2009


H&P 214 & 232 Location Dimensions

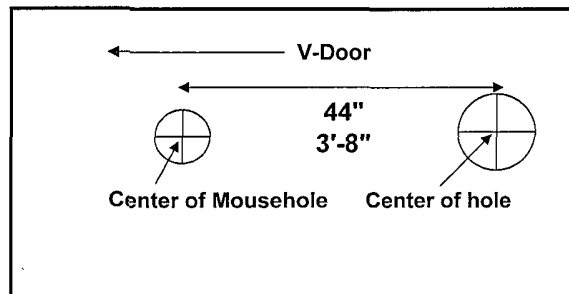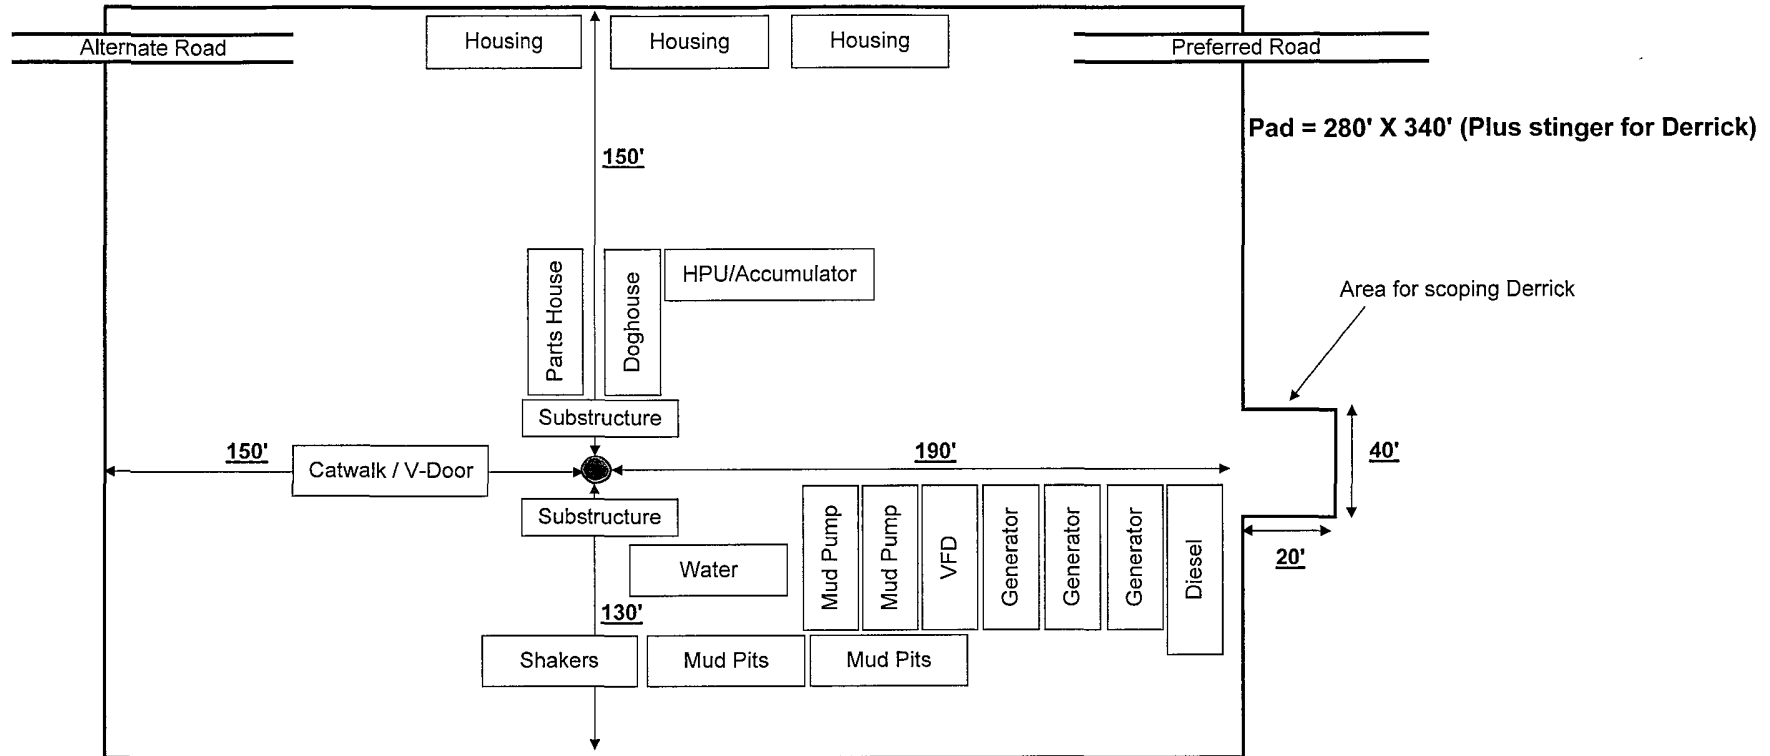


Notes for Rotating Mouse hole for a FlexRig3 & 25' Substructure:

- 1) 70' of mouse hole below ground level
- 2) If conductor pipe is less than 85' below ground level, recommend cement mouse hole in place in order to prevent break thru & circulation / washout thru mouse hole.
- 3) Use 12" (mini. Nominal size) pipe. This can be spiral weld or low pressure pipe, 10 3/4" is used in some applications but due to inaccuracies in location of mouse hole & potential out of alignment or centered in hole, 12" pipe recommended.
- 4) Cement mouse hole in 13 1/2" or 14 3/4" hole.
- 5) Cellar will need to be oblong in order to accommodate mouse hole (i.e. 5' x 10', 6' x 10',)
.... Operator decision

13-5/8" x 5,000 psi BOP Stack

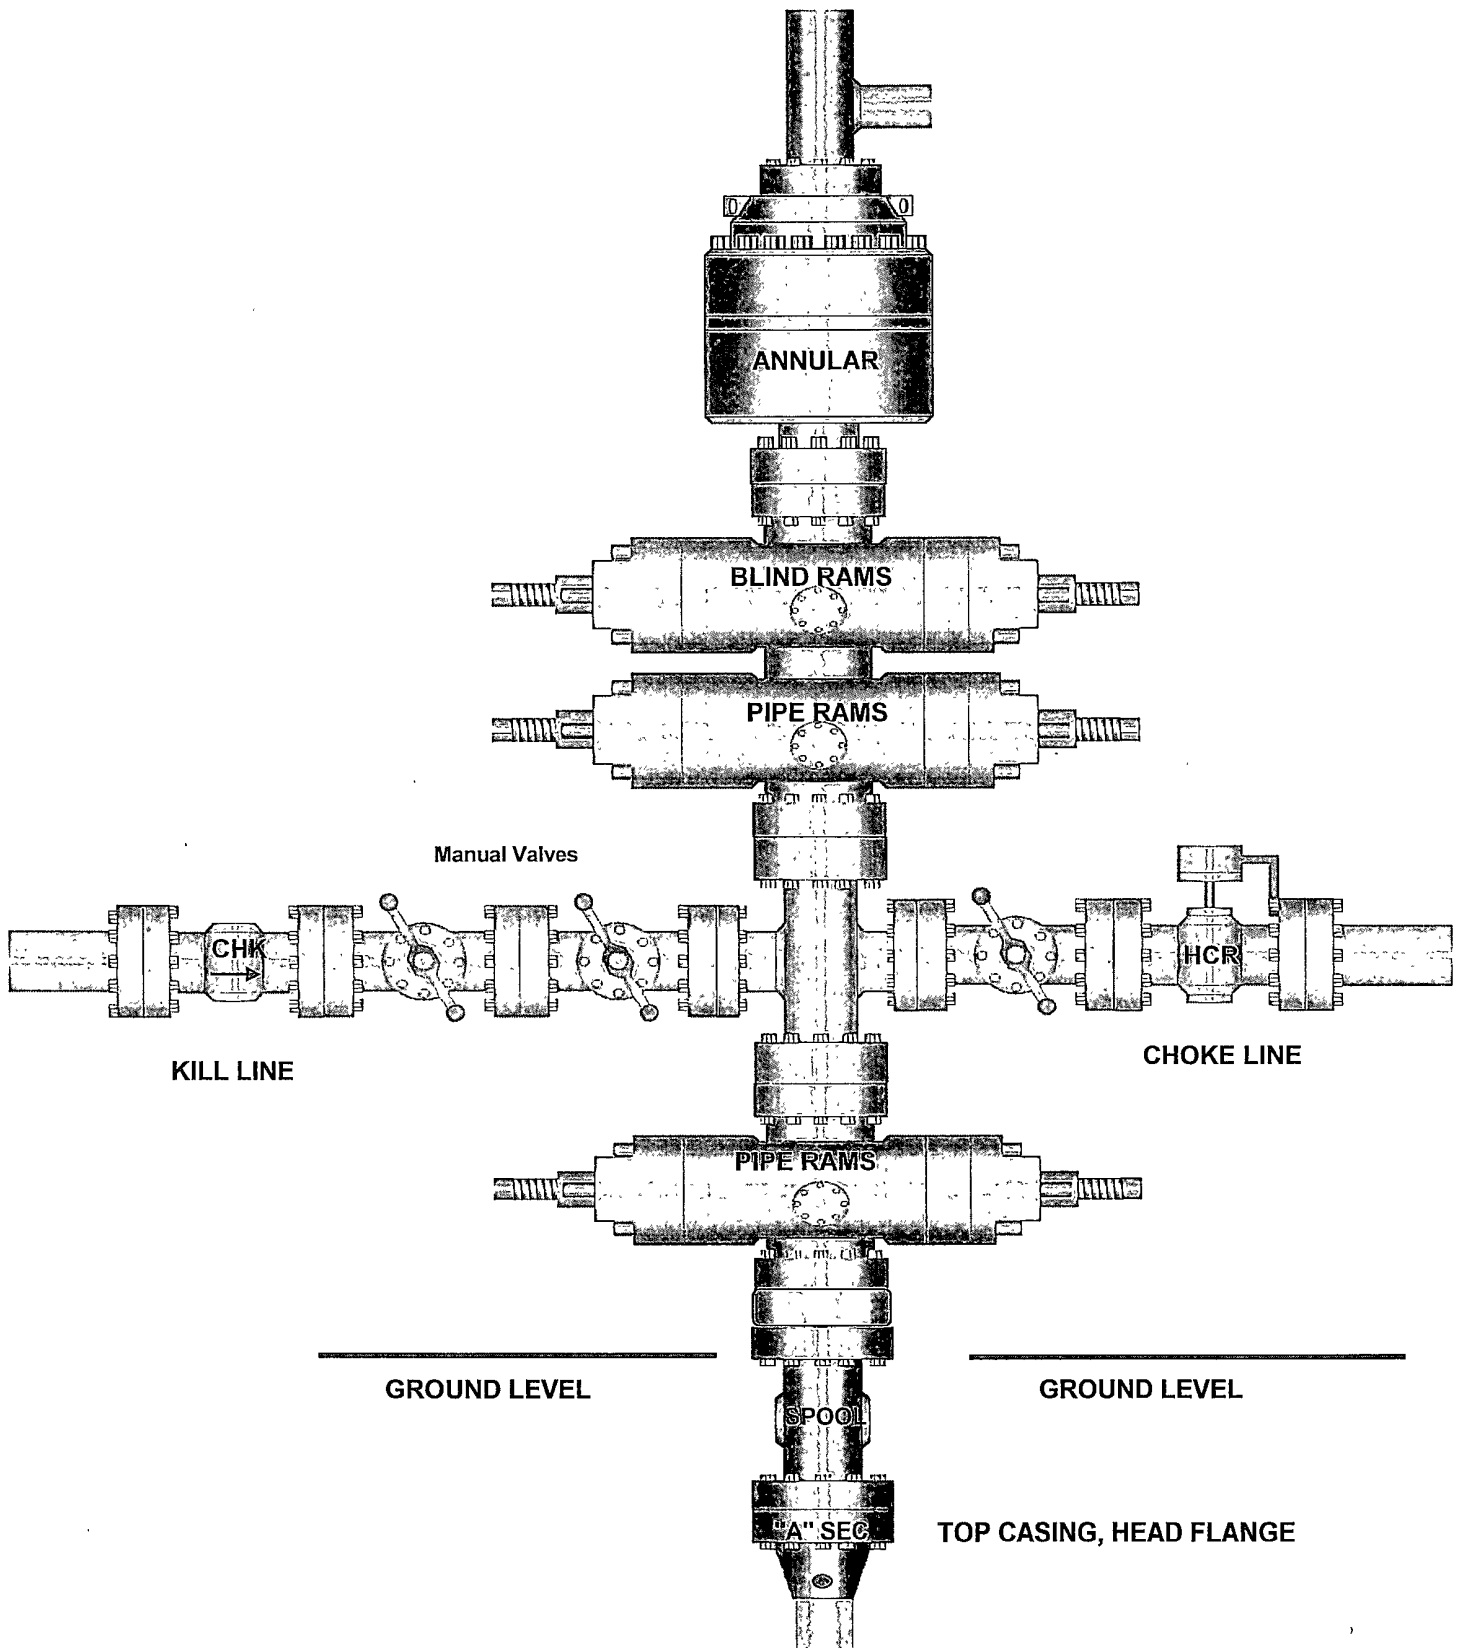

5,000 PSI CHOKE MANIFOLD

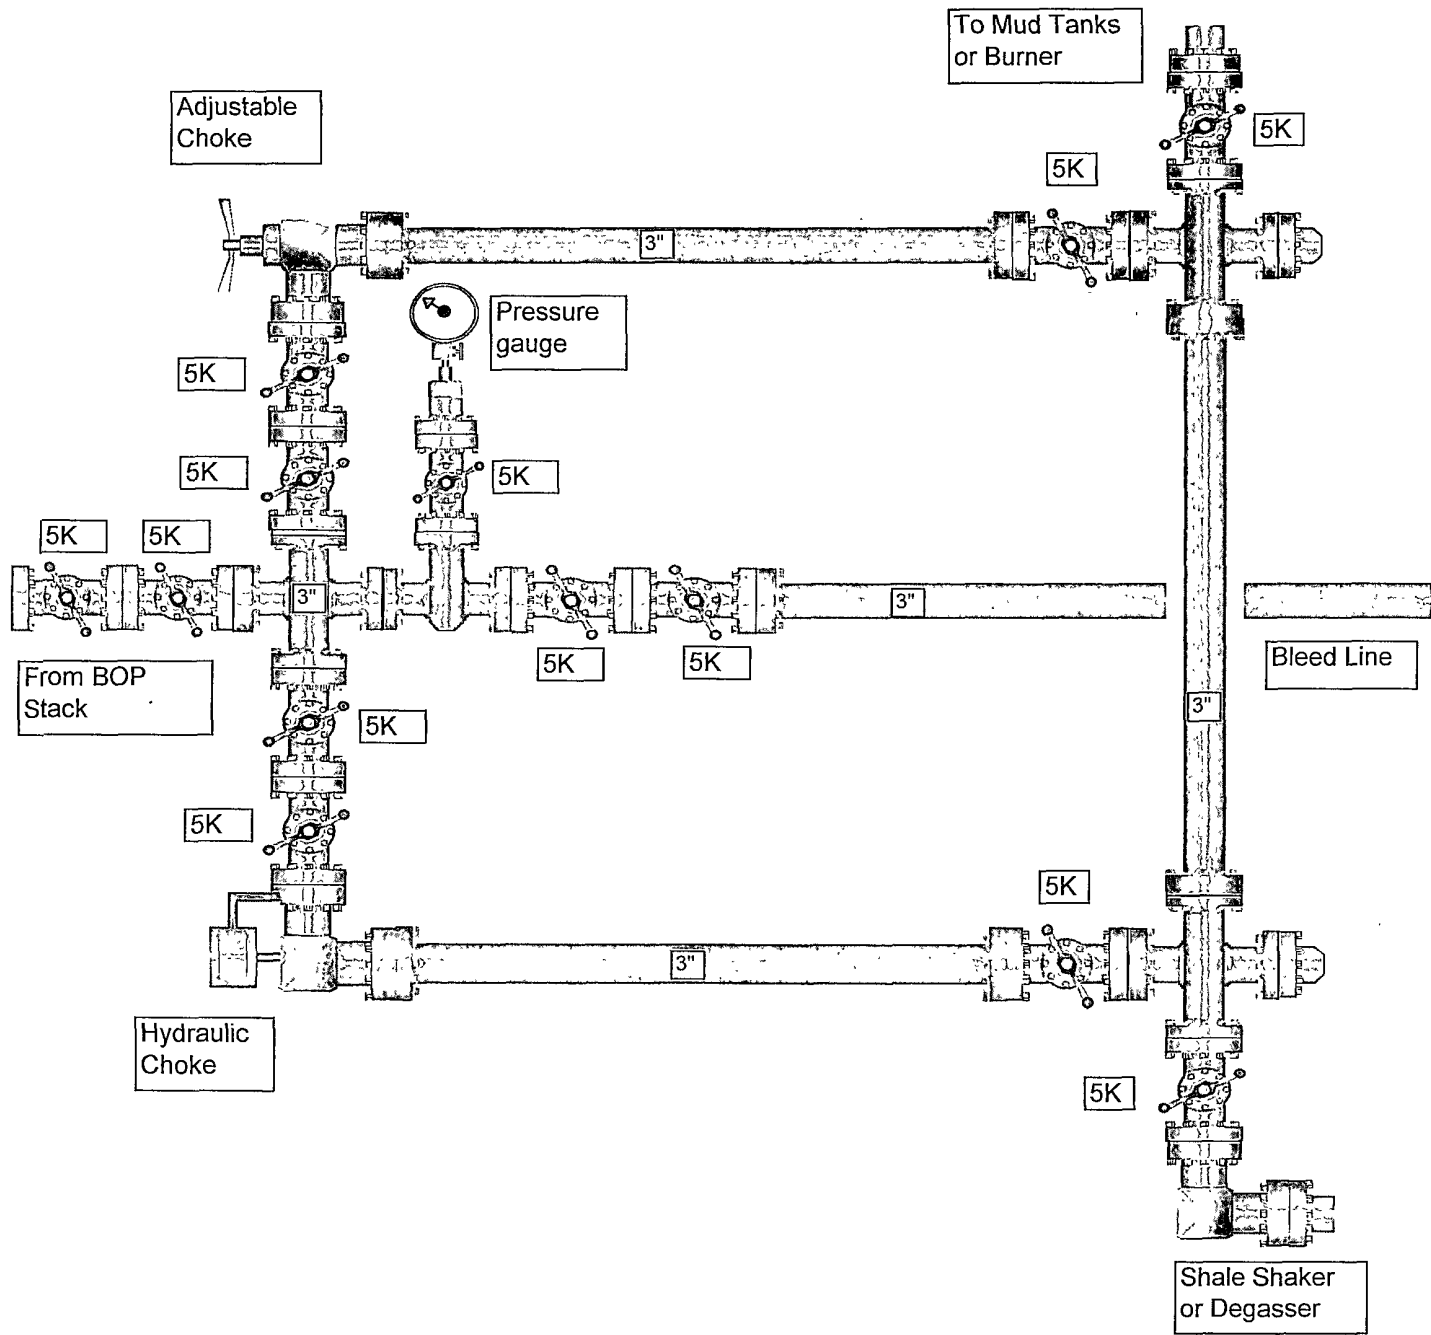



QUALITY DOCUMENT

**PHOENIX RUBBER
INDUSTRIAL LTD.**

H-6728 Szeged, Budapesti út 10. Hungary • H-6701 Szeged, P. O. Box 152
Phone: (3662) 566-737 • Fax: (3662) 566-738

SALES & MARKETING: H-1092 Budapest, Ráday út 42-44. Hungary • H-1440 Budapest, P. O. Box 26
Phone: (361) 456-4200 • Fax: (361) 217-2972, 456-4273 • www.taurusanergo.hu

QUALITY CONTROL INSPECTION AND TEST CERTIFICATE				CERT. N°: 555	
PURCHASER: Phoenix Beattie Co.				P.O. N°: 1519FA-871	
PHOENIX RUBBER order N°: 170466		HOSE TYPE: 3" ID Choke and Kill Hose			
HOSE SERIAL N°: 34137		NOMINAL / ACTUAL LENGTH: 11,43 m			
W.P. 68,96 MPa 10000 psi		T.P. 103,4 MPa 15000 psi		Duration: 60 min.	
Pressure test with water at ambient temperature See attachment: (1 page)					
↑ 10 mm = 10 Min. → 10 mm = 16 MPa					
COUPLINGS					
Type	Serial N°	Quality	Heat N°		
3" coupling with 4 1/16" Flange end	714 715	AISI 4130	C7626		
		AISI 4130	47357		
API Spec 16 C Temperature rate: "B"					
All metal parts are flawless					
WE CERTIFY THAT THE ABOVE HOSE HAS BEEN MANUFACTURED IN ACCORDANCE WITH THE TERMS OF THE ORDER AND PRESSURE TESTED AS ABOVE WITH SATISFACTORY RESULT.					
Date: 30. April 2002.	Inspector	Quality Control PHOENIX RUBBER Industrial Ltd. Hose Inspection and Pressure Testing Department			

H&P 214

~~Choke~~ Choke hose

