

Submit 3 Copies To Appropriate District
Office
District I
1625 N. French Dr., Hobbs, NM 87240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103
May 27, 2004

WELL API NO. 30-015-24452	
5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>	
6. State Oil & Gas Lease No.	
7. Lease Name or Unit Agreement Name Lightfoot	RECEIVED JAN - 6 2010 NMOCD ARTESIA
8. Well Number 1	
9. OGRID Number 16696	
10. Pool name or Wildcat Malaga Delaware	
SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)	
1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other	
2. Name of Operator OXY USA Inc.	
3. Address of Operator P.O. Box 50250 Midland, TX 79710-0250	
4. Well Location Unit Letter <u>J</u> : <u>1780</u> feet from the <u>south</u> line and <u>2460</u> feet from the <u>east</u> line Section <u>14</u> Township <u>24S</u> Range <u>28E</u> NMPM County <u>Eddy</u>	
11. Elevation (Show whether DR, RKB, RT, GR, etc.) <u>2977' GR</u>	
Pit or Below-grade Tank Application <input type="checkbox"/> or Closure <input type="checkbox"/> Pit type _____ Depth to Groundwater _____ Distance from nearest fresh water well _____ Distance from nearest surface water _____ Pit Liner Thickness: _____ mil Below-Grade Tank: Volume _____ bbls; Construction Material _____	

12. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐
OTHER: Run CIT ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐
CASING TEST AND CEMENT JOB ☐
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

See Attachment

Notify OCD 24 hrs. prior
to any work done.

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐ , a general permit ☐ or an (attached) alternative OCD-approved plan ☐

SIGNATURE David Stewart TITLE Sr. Regulatory Analyst DATE 1/14/2010

Type or print name David Stewart

E-mail address: david_stewart@oxy.com
Telephone No. 432-685-5717

For State Use Only

APPROVED BY [Signature] TITLE _____ DATE 1/14/2010

Conditions of Approval, if any:

Approval Granted providing work
is complete by 3/14/2010

TD-13000' PBTD-6075' Perfs-6104-6140' CIBP-6075'

20" 94# csg @ 623' w/1380sx, 26" hole, TOC-Surf-Circ

13-3/8" 54.5-61# csg @ 2623' w/2800sx, 17-1/2" hole, TOC-Surf-Circ

9-5/8" 40-43.5# csg @ 9772', DVT @ 5819' w/2460sx, 12-1/4" hole, TOC-3100'-TS

5-1/2" 17# liner @ 9369-12882' w/1320sx, 8-1/2" hole, TOC-9369'-Circ

1. RIH & Tag CIBP @ 6075' M&P 150sx cmt to 5770'
2. M&P 70sx cmt @ 4300-4155'
3. Perf @ 2685', sqz 110sx cmt to 2560' WOC-Tag
4. Perf @ 673', sqz 85sx cmt to 573' WOC-Tag
5. Perf @ 150', sqz 125sx cmt to Surface

10# MLF between plugs

OXY USA Inc. - Proposed
Lightfoot Com #1
API No. 30-015-24452

125sx @ 150'-Surface

85sx @ 673-573' WOC-Tag

110sx @ 2685-2560' WOC-Tag

70sx @ 4300-4155'

150sx @ 6075-5770'


3/02-CIBP @ 6075'

12/95-M&P 70sx cmt 9330-9130'
8/87-CIBP @ 9330'

8/87-CIBP @ 11460' w/ 35' cmt

9/83-CIBP @ 11590'

9/83-CIBP @ 12060' w/ 35' cmt
8/83-CIBP @ 12425' w/ 32' cmt
8/83-CIBP @ 12610'

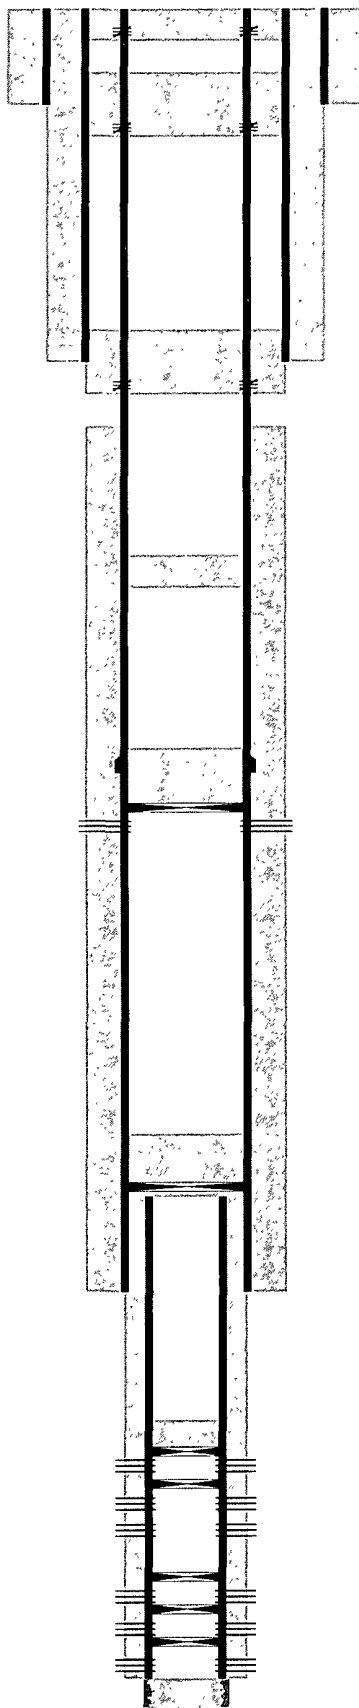

TD-13000'

Perf @ 150'

Perf @ 673'

Perf @ 2685'

12/95-Perfs @ 6104-6140'

Perfs @ 11520-11526'

Perfs @ 11606-11865'

Perfs @ 12100-12138'

Perfs @ 12460-12471'

Perfs @ 12655-12744'


26" hole @ 623'
20" csg @ 623'
w/ 1380sx-TOC-Surf-Circ

17-1/2" hole @ 2623'
13-3/8" csg @ 2623'
w/ 2800sx-TOC-Surf-Circ

12-1/4" hole @ 9772'
9-5/8" csg @ 9772'
DVT @ 5819'
1st w/ 1375sx-TOC-5814'-Circ
2nd w/ 1085sx-TOC-3100'-TS

8-1/2" hole @ 13000'
5-1/2" liner @ 9369-12882'
w/ 1320sx-TOC-9369'-Circ

OXY USA Inc. - Current
Lightfoot Com #1
API No. 30-015-24452

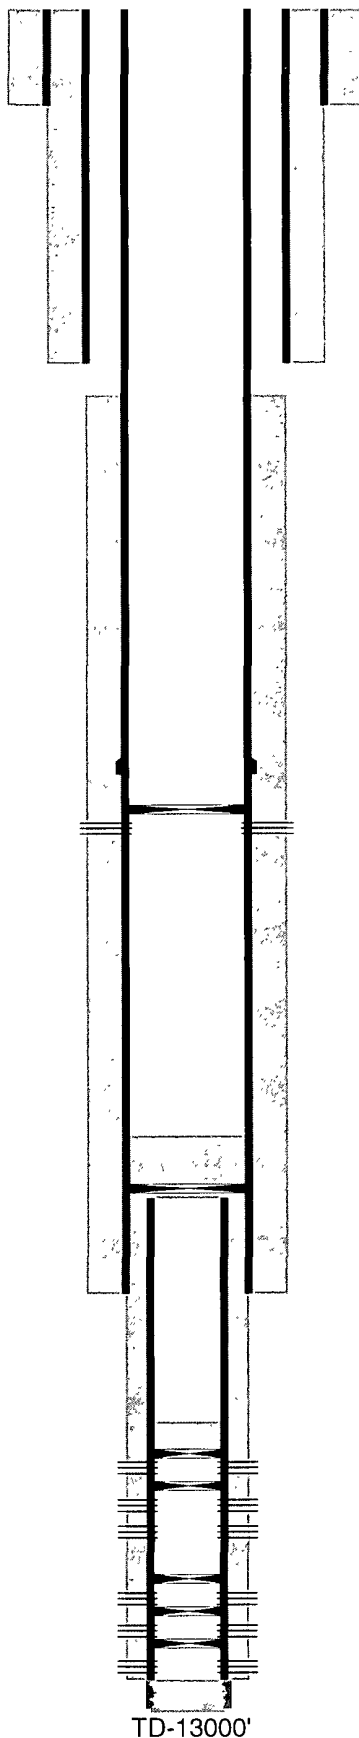

26" hole @ 623'
 20" csg @ 623'
 w/ 1380sx-TOC-Surf-Circ

17-1/2" hole @ 2623'
 13-3/8" csg @ 2623'
 w/ 2800sx-TOC-Surf-Circ

3/02-CIBP @ 6075'

12/95-Perfs @ 6104-6140'

12/95-M&P 70sx cmt 9330-9130'
 8/87-CIBP @ 9330'

12-1/4" hole @ 9772'
 9-5/8" csg @ 9772'
 DVT @ 5819'
 1st w/ 1375sx-TOC-5814'-Circ
 2nd w/ 1085sx-TOC-3100'-TS

8/87-CIBP @ 11460' w/ 35' cmt

8-1/2" hole @ 13000'
 5-1/2" liner @ 9369-12882'
 w/ 1320sx-TOC-9369'-Circ

9/83-CIBP @ 11590'

Perfs @ 11520-11526'

9/83-CIBP @ 12060' w/ 35' cmt
 8/83-CIBP @ 12425' w/ 32' cmt
 8/83-CIBP @ 12610'

Perfs @ 11606-11865'

Perfs @ 12100-12138'
 Perfs @ 12460-12471'
 Perfs @ 12655-12744'

TD-13000'