

Submit 1 Copy To Appropriate District  
Office  
District I  
1625 N French Dr., Hobbs, NM 88240  
District II  
1301 W. Grand Ave., Artesia, NM 88210  
District III  
1000 Rio Brazos Rd., Aztec, NM 87410  
District IV  
1220 S St Francis Dr., Santa Fe, NM  
87505

State of New Mexico  
Energy, Minerals and Natural Resources

Form C-103  
October 13, 2009

OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

WELL API NO. 30-015-24318
5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name Gissler AV
8. Well Number 31
9. OGRID Number 025575
10. Pool name or Wildcat Eagle Creek; San Andres

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS)	
1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/>	<b>RECEIVED</b>  JAN 28 2010  NMOCD ARTESIA
2. Name of Operator Yates Petroleum Corporation	
3. Address of Operator 105 South Fourth Street, Artesia, NM 88210	
4. Well Location Unit Letter M : 330 feet from the South line and 330 feet from the West line Section 23 Township 17S Range 25E NMPM Eddy County	
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3508'GR	

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒  
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐  
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐  
DOWNHOLE COMMINGLE ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐  
COMMENCE DRILLING OPNS. ☐ P AND A ☐  
CASING/CEMENT JOB ☐

OTHER: ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Yates Petroleum Corporation plans to plug and abandon this well as follows:

1. MIRU WSC. Rig up any safety equipment as needed.
2. RIH with tubing to 1203', spot 30 sx thixotropic cement across perforations. WOC 2 hrs. Tag plug, reset if necessary.
3. RIH with tubing to top of the previous plug and load hole with plugging mud. Spot a 30 sx Class "C" cement plug with 2% CaCl across and or over the intermediate casing shoe. WOC 2 hrs. Tag plug, reset if necessary.
4. RIH with tubing to 407' and spot a 30 sx Class "C" cement plug across the surface casing shoe from 0-407'. WOC and tag plug, reset if necessary.
5. Cut off wellhead, install marker and clean up location as per regulated.

NOTE: Yates Petroleum Corporation will use steel pits and no earth pits

**Notify OCD 24 hrs. prior  
To any work done.**

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Tina Huerta TITLE Regulatory Compliance Supervisor DATE January 27, 2010

Type or print name Tina Huerta E-mail address: tinah@yatespetroleum.com PHONE: 575-748-4168

For State Use Only

APPROVED BY: [Signature] TITLE is complete by 5/1/2010 DATE 2/1/2010


Conditions of Approval (if any):

**WELL NAME:** Gissler AV #31 **FIELD:** Eagle Creek SA  
**LOCATION:** 330' FSL & 330' FWL of Section 23-17S-25E Eddy Co., NM  
**GL:** 3,508' **ZERO:** **KB:**  
**SPUD DATE:** 12/19/82 **COMPLETION DATE:** 1/30/83  
**COMMENTS:** API No.: 30-015-24318

# CASING PROGRAM

10-3/4" 40 5# K-55	357'
7" 23#	1,154'
4-1/2" 9 5# K-55	1,485'

14-3/4"  
Hole

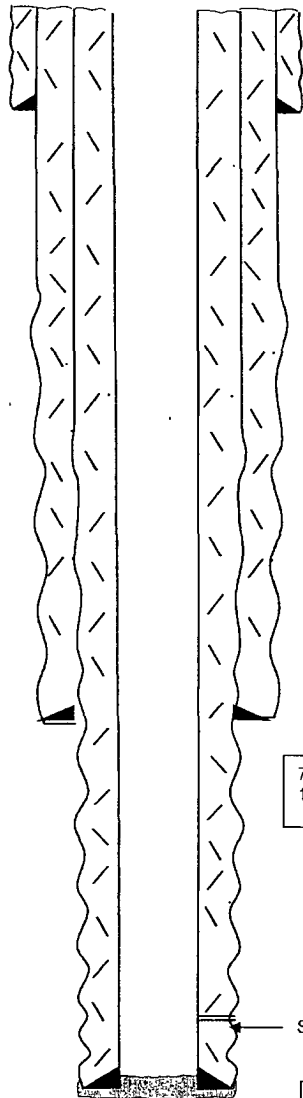

10-3/4" @ 357' w/225 sx cmt  
(Circ)

**Before**

9-7/8" Hole

**TOPS**  
SA 720'

6-1/4" Hole

7" @ 1,154' w/525 total sx  
1'ed to surface

SA Perfs. 1,203-1,444'

4-1/2" @ 1,485' w/200 sx (Circ)

PBTD. 1,484'  
TD 1,500'


**Not to Scale**  
8/24/09  
DC/Hill

WELL NAME: Gissler AV #31 FIELD: Eagle Creek SA  
 LOCATION: 330' FSL & 330' FWL of Section 23-17S-25E Eddy Co., NM  
 GL: 3,508' ZERO: \_\_\_\_\_ KB: \_\_\_\_\_  
 SPUD DATE: 12/19/82 COMPLETION DATE: 1/30/83  
 COMMENTS: API No.: 30-015-24318

# CASING PROGRAM

10-3/4" 40.5# K-55	<b>357'</b>
7" 23#	<b>1,154'</b>
4-1/2" 9.5# K-55	<b>1,485'</b>

14-3/4"  
Hole

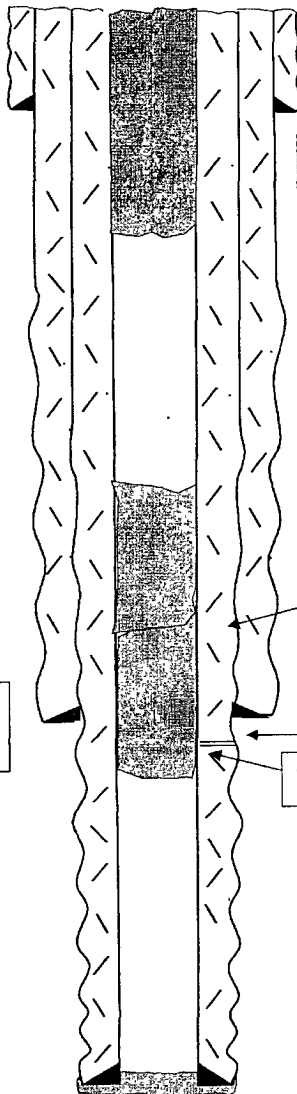

10-3/4" @ 357' w/225 sx cmt  
(Circ)

Cmt Plug 0-407 across casing  
shoe w/30 sx

**After**

9-7/8" Hole

7" @ 1,154' w/525  
total sx  
1"ed to surface

6-1/4" Hole

30 sx Intermediate casing shoe  
plug

SA Perfs: 1,203-1,444'

Cmt Plug 1103-1203 w/30 sx

**TOPS**  
SA 720'

4-1/2" @ 1,485' w/200 sx (Circ)

PBTD: 1,484'  
TD 1,500'

**Not to Scale**  
8/24/09  
DC/Hill