

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

Oil Cons.  
N.M. DIV-Dist. 2  
1301 W. Grand Avenue  
Artesia, NM 88210

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals

**SUBMIT IN TRIPLICATE**

**RECEIVED**

**JAN 27 2004**

**OCD-ARTESIA**

1. Type of Well  
☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

Mack Energy Corporation

3. Address and Telephone No.

P.O. Box 960, Artesia, NM 88211-0960

(505)748-1288

4. Location of Well (Footage, Sec., T. R., M. or Survey Description)

2310 FNL & 330 FWL, Sec. 21-T17S-R28E, E

5. Lease Designation and Serial No.

LC-046250A

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Red Lake Sand Unit #31

9. API Well No.

30-015-01493

10. Field and Pool, or Exploratory Area

Red Lake; Queen-Grayburg-SA

11. County or Parish, State

Eddy, NM

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☒ Notice of Intent  
☐ Subsequent Report  
☐ Final Abandonment Notice

TYPE OF ACTION

- ☒ Abandonment  
☐ Recompletion  
☐ Plugging Back  
☐ Casing Repair  
☐ Altering Casing  
☐ Other \_\_\_\_\_
- ☐ Change of Plans  
☐ New Construction  
☐ Non-Routine Fracturing  
☐ Water Shut-Off  
☐ Conversion to Injection  
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work)\*

Mack Energy Corporation proposes to plug and abandon well as follows:

1. Notify BLM 24 hours prior to starting plugging operations.
2. Set 100' plug from 1765-1665'. WOC and tag.
3. Circulate hole w/mud gel.
4. Perforate @ 553' squeeze 100' plug 50' above and below 8 5/8 casing. WOC and tag.
5. Perforate @ 60' circulate cement to surface.
6. Install dry hole marker.

**APPROVED**

**JAN 23 2004**

**LES BABYAK  
PETROLEUM ENGINEER**

14. I hereby certify that the foregoing is true and correct

Signed

*Jerry W. Shenell*

Title

Production Clerk

Date

1/14/04

(This space for Federal or State office use)

Approved by

Conditions of approval, if any:


Title

Date


MACK ENERGY CORPORATION  
 RED LAKE SAND UNIT #31  
 Sec 21 T17S R28E 2310FNL 330FNL

BLM

BEFORE

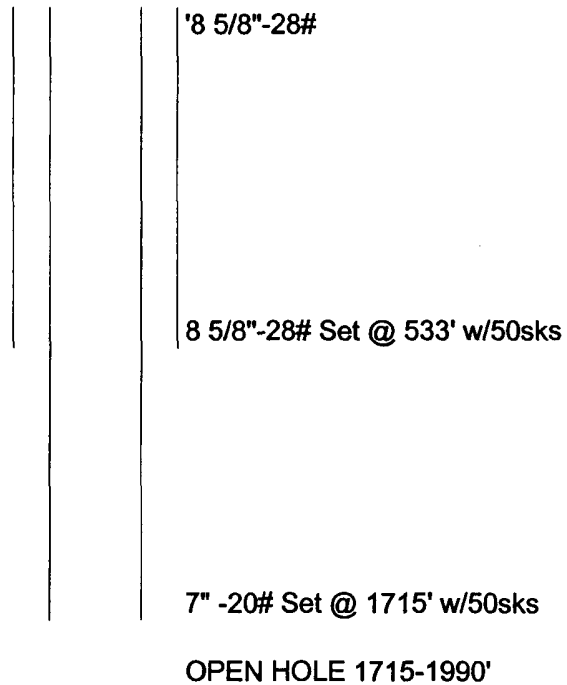

AFTER



1. Notify BLM 24 hrs. prior to any work done.
2. Set 100' cmt plug 1765'-1665' and tag.
3. Circ hole with mud gel.
4. Perf @ 553' squeeze 100' cmt plug 50' above & below 8 5/8" and tag.
5. Perf @ 60' circ cmt to surface
6. Install Dry Hole Marker