

Submit 3 Copies To Appropriate District
Office
District I
1625 N. French Dr., Hobbs, NM 87240
District II
811 South First, Artesia, NM 87210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
2040 South Pacheco, Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION

2040 South Pacheco
Santa Fe, NM 87505

Form C-103
Revised March 25, 1999

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-015-21687
1. Type of Well: Oil Well <input type="checkbox"/> Gas Well <input checked="" type="checkbox"/> Other		5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
2. Name of Operator OXY USA WTP Limited Partnership 192463		6. State Oil & Gas Lease No.
3. Address of Operator P.O. Box 50250 Midland, TX 79710-0250		7. Lease Name or Unit Agreement Name: C.D.M. A Com RECEIVED JAN 22 2004
4. Well Location Unit Letter D : 990 feet from the north line and 660 feet from the west line Section 29 Township 21S Range 27E NMPM County Eddy		8. Well No. 1 OCD-ARTESIA
		9. Pool name or Wildcat Burton Flat Morrow
10. Elevation (Show whether DR, RKB, RT, GR, etc.) 3158'		

11. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input checked="" type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>	PLUG AND ABANDONMENT <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	MULTIPLE COMPLETION <input type="checkbox"/>	CASING TEST AND CEMENT JOB <input type="checkbox"/>	
OTHER: <input type="checkbox"/>		OTHER: <input type="checkbox"/>	

12. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompilation.

TD-11690' Perfs-11320-11445'

13-3/8" 48# csg @ 405' w/ 450sx, 17-1/2" hole, TOC-Surf-Circ

9-5/8" 32-36# csg @ 3000' w/ 1370sx, 12-1/4" hole, TOC-Surf-Circ

5-1/2" 17-20# csg @ 1226-11690' w/ 1060sx, 8-3/4" hole, *TOC-8310'-TS

1. M&P 25sx cmt @ 2680-2580' -WOC-TAG

2. M&P 25sx cmt @ 2000-1900'

3. M&P 25sx cmt @ 1450-1350'

4. M&P 35sx cmt @ 1276-1176' -WOC-TAG

5. M&P 50sx cmt @ 455-355' -WOC-TAG

6. M&P 50sx cmt @ 455-355'

7. M&P 25sx cmt surface plug -WOC-24 H2S-TAG 10# MLF between plugs

TOF @ 3256' w/ 4-3/4" bit, 6-3-1/2" DC's, 2-7/8" tbg, BOF @ +/- 11170', Casing collapsed @ 2680-2761'

*10/01-perf @ 2866', sqz 526sx cmt, TOC-1136'-CBL

*25 SX Plug @ 11,200' - TAG

*25 SX Plug @ 8,795'

* Perf csg @ 5005' - place 100' of cmt inside & outside of csg. 4905'-5005'

* Perf csg @ 3050' - place 100' of cmt inside & outside of csg. 2950'-3050' - TAG

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE David Stewart TITLE Sr. Regulatory Analyst DATE 1/21/04

Type or print name David Stewart


Telephone No. 432-685-5717

(This space for State use)

APPROVED BY [Signature] TITLE Field Rep ID DATE JAN 29 2004

Conditions of approval, if any:

OXY USA WTP LP - Current
C.D.M. A Com #1
API No. 30-015-21687

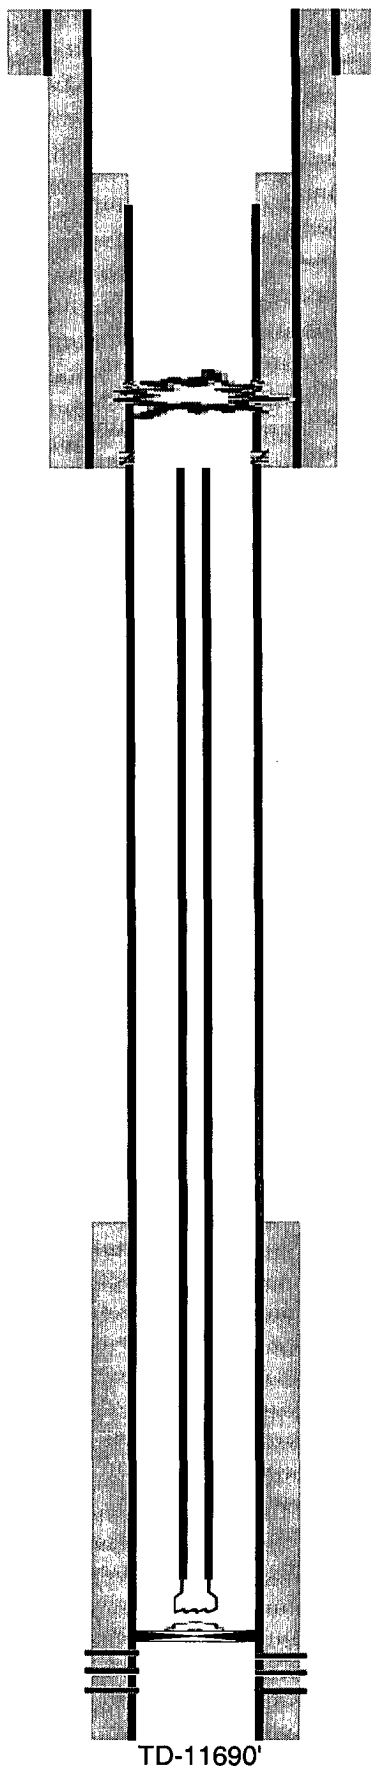

17-1/2" hole @ 405'
13-3/8" csg @ 405'
w/450sx-TOC-Surf-Circ

5-1/2" csg cut @ 1226'

Csg Collapsed @ 2680-2761'

10/01-Csg Lk @ 2899-2930', Perf @
2866-2867', Sqz 526sx cmt, TOC-1136'-CBL

12-1/4" hole @ 3000'
9-5/8" csg @ 3000'
w/1370sx-TOC-Surf-Circ

TOF @ 3256'
4-3/4" bit, 6-3-1/2" DC's, 2-7/8" tbg
BOF @ +/- 11170'

8-3/4" hole @ 11690'
5-1/2" csg @ 11690'
w/1060sx-TOC-8310'-TS

RBP @ 11202'

Morrow Perfs @ 11320-11445'

TD-11690'

OXY USA WTP LP - Proposed
C.D.M. A Com #1
API No. 30-015-21687

25sx Surface
50sx @ 455-355'

35sx @ 1276-1176'


25sx @ 1450-1350'

25sx @ 2000-1900'

25sx @ 2680-2580'

TOF @ 3256'
4-3/4" bit, 6-3-1/2" DC's, 2-7/8" tbg
BOF @ +/- 11170'

RBP @ 11202'

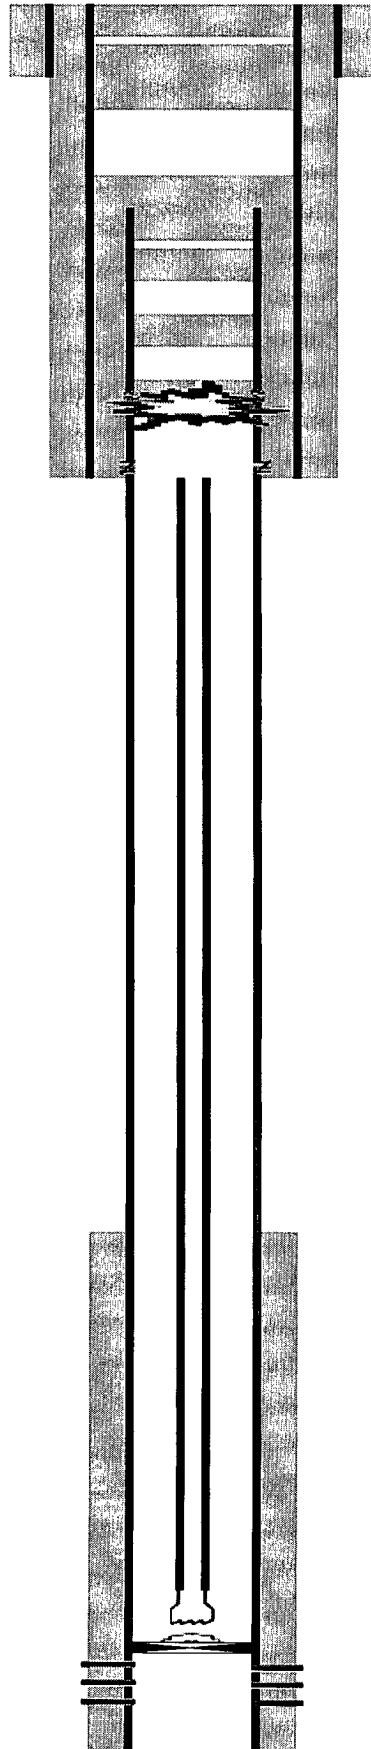

17-1/2" hole @ 405'
13-3/8" csg @ 405'
w/450sx-TOC-Surf-Circ

5-1/2" csg cut @ 1226'

Csg Collapsed @ 2680-2761'

10/01-Csg Lk @ 2899-2930', Perf @
2866-2867', Sqz 526sx cmt, TOC-1136'-CBL

12-1/4" hole @ 3000'
9-5/8" csg @ 3000'
w/1370sx-TOC-Surf-Circ

8-3/4" hole @ 11690'
5-1/2" csg @ 11690'
w/1060sx-TOC-8310'-TS

Morrow Perfs @ 11320-11445'

TD-11690'