

Submit 1 Copy To Appropriate District
Office
District I
1625 N. French Dr , Hobbs, NM 88240
District II
1374 W Grand Ave , Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S St Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
October 13, 2009

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-015-22435	
5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>	
6. State Oil & Gas Lease No.	
7. Lease Name or Unit Agreement Name NDDUP Unit	RECEIVED APR 23 2010 NMOCD ARTESIA
8. Well Number 114	
9. OGRID Number 025575	
10. Pool name or Wildcat Dagger Draw; Upper Penn, North	
4. Well Location Unit Letter <u>F</u> : <u>1980</u> feet from the <u>North</u> line and <u>1980</u> feet from the <u>West</u> line Section <u>28</u> Township <u>19S</u> Range <u>25E</u> NMPM Eddy County	
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3502'KB	

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEN ☐

**Notify OCD 24 hrs. prior
to any work done.**

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Yates Petroleum Corporation plans to plug and abandon this well as follows:

1. MIRU WSU. RU any H2S and safety equipment as needed. No casing recovery will be attempted.
2. Set a CIBP at 7590' with 35' cement on top. This will place a plug over the Canyon perforations.
3. Perforate 4 squeeze holes at 6022'. Spot 160' cement plug inside and outside casing from 5862'-6022'. This will leave a plug across Wolfcamp top. WOC and tag plug, reset if necessary.
4. Perforate 4 squeeze holes at 4022'. Spot 140' cement plug inside and outside casing from 3882'-4022'. WOC and tag plug, reset if necessary.
5. Perforate 4 squeeze holes at 2368'. Spot 120' cement plug inside and outside casing from 2248'-2368'. This will leave a plug across Glorieta top. WOC and tag plug, reset if necessary.
6. Perforate 4 squeeze holes at 1230'. Spot 100' cement plug inside and outside casing from 1130'-1230'. This will leave a plug across intermediate casing shoe. WOC and tag plug, reset if necessary.
7. Perforate 4 squeeze holes at 407'. Spot 100' cement plug inside and outside casing from 307'-407'. This will leave a plug across surface casing shoe. WOC and tag plug, reset if necessary.
8. Perforate 4 squeeze holes at 100'. Spot 100' cement plug inside and outside casing from 0-100'. This will leave a plug from 100' up to surface. WOC and tag plug, reset if necessary.
9. Remove all surface equipment, weld dry hole marker and clean location as per regulations.

NOTE: Yates Petroleum Corporation will use steel pits and no earth pits

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Tina Huerta TITLE Regulatory Compliance Supervisor DATE April 22, 2010

Type or print name Tina Huerta E-mail address: tinah@yatespetroleum.com PHONE: 575-748-4168

For State Use Only

APPROVED BY: Phil Harkin TITLE Approval Granted providing work is complete by 2/22/2010 DATE 4/27/2010
Conditions of Approval (if any):

WELL NAME: NDDUP Unit #114 **FIELD:** Dagger Draw
LOCATION: 1,980' FNL & 1,980' FWL of Section 28-19S-25E Eddy Co., NM
GL: 3,490' **ZERO:** 12' **KB:** 3,502'
SPUD DATE: 3/11/78 **COMPLETION DATE:** 4/27/78
COMMENTS: 30-015-22435
 (Formerly Ross IZ #1)

CASING PROGRAM

13-3/8" 48# K-55	350'
8-5/8" 24 K-55	1,180'
5-1/2" 17 K-55 (897')	
5-1/2" 15.5 K-55 (5,600')	
5-1/2" 17 K-55 (1970')	
5-1/2" 17 N-80 (800')	9,297'

17-1/2" Hole

12-1/4" Hole

10-3/4" @ 357'
w/225 sx cmt (Circ)

8-5/8" @ 1,180' w/600 sx (Circ)

Before

7-7/8" Hole

TOC by TS 6,280'

TOPS	
SA	708'
Glorieta	2,318'
WC	5,972'
Canyon	7,620'
Strawn	8,160'
Atoka	8,718'
Morrow Cl	9,128'
Chester	9,404'

Canyon Perfs: 7,640-7,760' (48)

Uni-6 8,829'

Atoka Perfs. 8,860-667' (12); 8,930-35' (10); 8,952-56' (8)

RBP Uni-6 @ 8,995'

Uni-6 w/Blanking Plug @ 9,110'

Morrow Perfs 9,144-50'

Uni-6 w/SV @ 9,158'

Morrow Perfs. 9,166-9,178'

5-1/2" @ 9,297' w/425 sx


TD: 9,460'

Not to Scale
 10/19/09
 DC/Hill

WELL NAME: NDDUP Unit #114 FIELD: Dagger Draw
 LOCATION: 1,980' FNL & 1,980' FWL of Section 28-19S-25E Eddy Co., NM
 GL: 3,490' ZERO: 12' KB: 3,502'
 SPUD DATE: 3/11/78 COMPLETION DATE: 4/27/78
 COMMENTS: 30-015-22435
 (Formerly Ross IZ #1)

CASING PROGRAM

13-3/8" 48# K-55	350'
8-5/8" 24 K-55	1,180'
5-1/2" 17 K-55 (897')	
5-1/2" 15.5 K-55 (5,600')	
5-1/2" 17 K-55 (1970')	
5-1/2" 17 N-80 (800')	9,297'

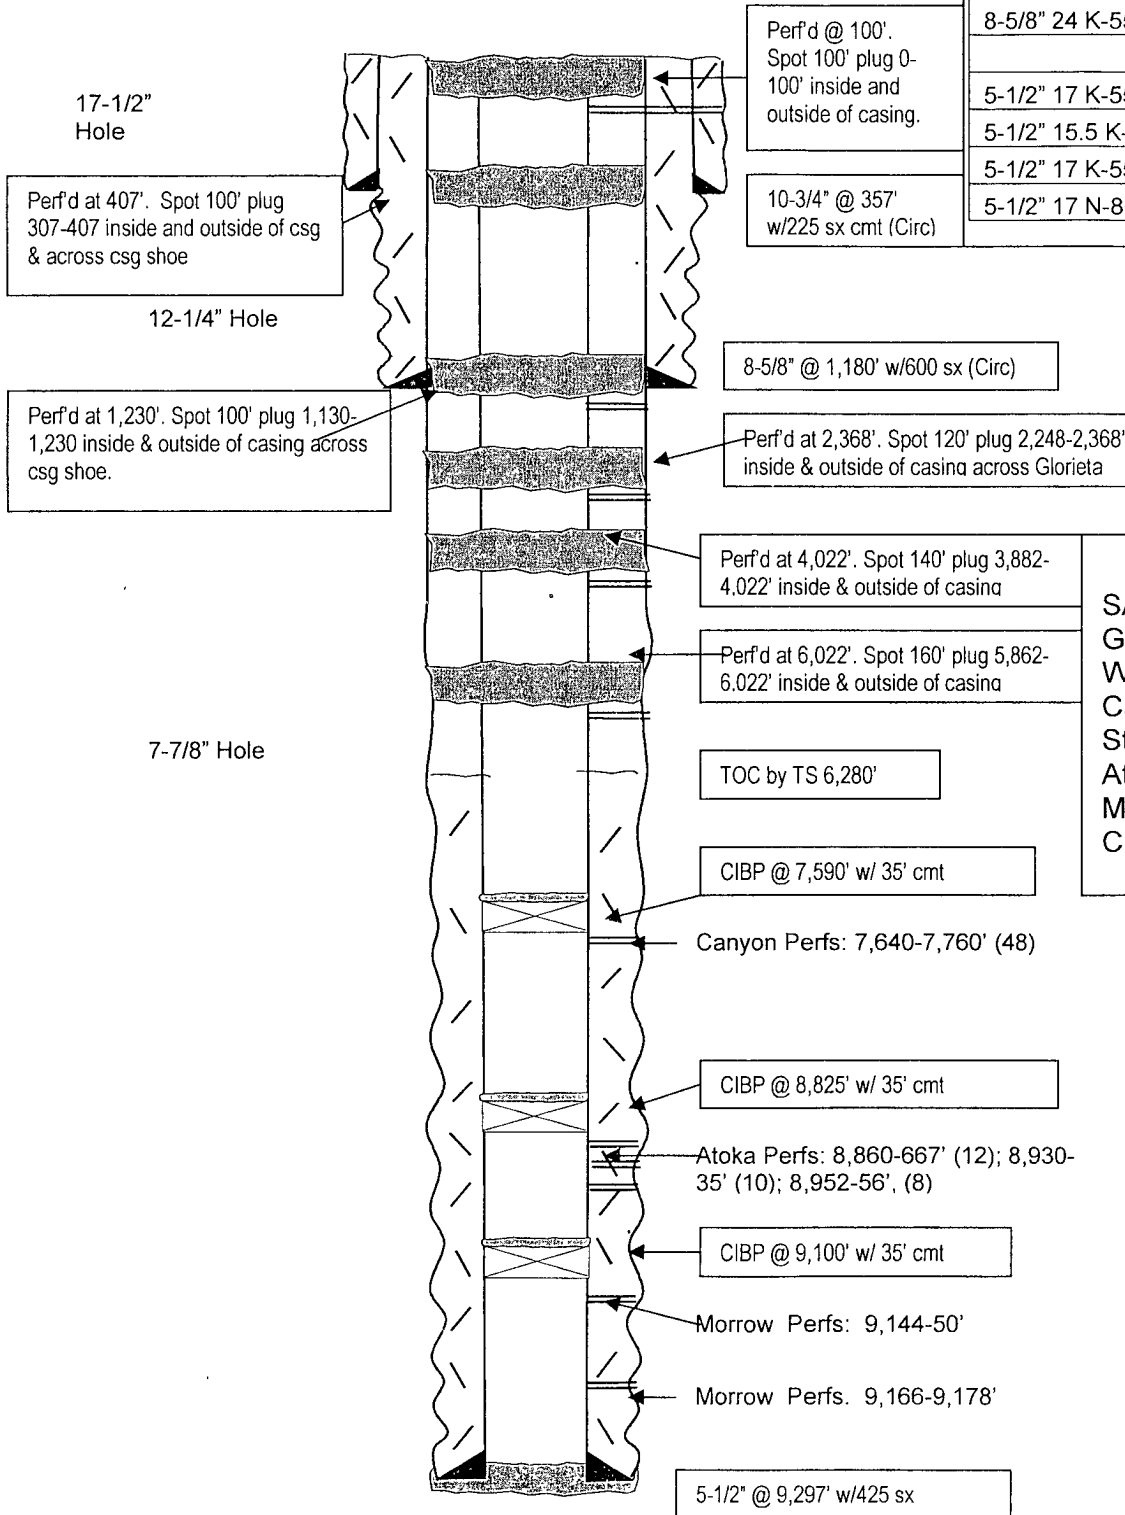

After

TOPS

SA	708'
Glorieta	2,318'
WC	5,972'
Canyon	7,620'
Strawn	8,160'
Atoka	8,718'
Morrow Cl	9,128'
Chester	9,404'

TD: 9,460'

Not to Scale
 10/19/09
 DC/Hill