#### Form 3160-5 } (August 2007)

# UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

## OCD-ARTESIA

RECEIVED

OMB No 1004-0137 Expires July 1, 2010 APR 1 9 2010

#### SUNDRY NOTICES AND REPORTS ON WELLS


Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No NM-043625 NMOCD ARTESIA

6 If Indian, Allottee or Tribe Name

|   |   |   |  | NA  |   |   |
|---|---|---|--|---|---|---|
| SUBMIT IN TRIPLICATE - Other instructions on page 2.  1 Type of Well  |   |   |  | 7. If Unit or CA/Agreement, Name and/or No  |   |   |
|   |   |   |  |   |   | X Oil Well Gas Well Other  2 Name of Operator |
| Saguaro AGS Federal Com #6  |   |   |  |   |   |   |
| Yates Petroleum Corporation   |   |   |  | 9. API Well No  |   |   |
| 3a. Address   |   | 3b Phone No. (include area code,  | ne No. (include area code)   |   | 30-015-26494  |   |
| 105 S. 4th Str., Artesia, NM 8  | 8210  | 575-748-1471  |  | 10 Field and Pool or Exploratory Area   |   |   |
| 4. Location of Well (Footage, Sec , T ,R.,M., OR Survey Description)  |   |   |  | North Dagger Draw Upper Penn  |   |   |
|   |   |   |  | 11 County or Parish, State .  |   |   |
| 1980'FNL & 1980'FEL of Section 11-T20S-R24E (Unit G, SWNE)  |   |   |  | Eddy County, New Mexico   |   |   |
|   |   | INDICATE NATURE OF  | NOTICE, RE   |   |   |   |
| TYPE OF SUBMISSION  |   | TYPE C  | OF ACTION  |   |   |   |
|   |   |   |  |   |   |   |
| X Notice of Intent  | Acidize   | Deepen  | Production (S  | trart/ Resume)  | Water Shut-Off  |   |
|   | Alter Casing  | Fracture Treat  | Reclamation  | L.  | Well Integrity  |   |
| Subsequent Report   | Casing Repair   | New Construction  | Recomplete   |   | Other   |   |
|   | Change Plans  | X Plug and Abandon  | Temporarily A  | Abandon   |   |   |
| Final Abandonment Notice  | Convert to Injection  | Plug Back   | Water Dispos   | al  |   |   |
| <ul> <li>2. Set a CIBP at 7640' with 35'</li> <li>3. Load hole with plugging mud</li> <li>4. Load hole with plugging mud</li> <li>5. Load hole with plugging mud</li> <li>6. Load hole with plugging mud</li> </ul>   | d and spot 160' ceme<br>d and spot 140' ceme  | ent plug from 4970'-5130'   | '. This will le  | ave a plug acro   | ss Abo top.   |   |
| This will leave a plug across 7. Load hole with plugging mud will leave 150' surface plug.  | d and spot 150' ceme<br>surface casing shoe<br>d and spot 150' ceme   | ent plug from 2024'-2144'<br>ent plug from 1103'-1253'<br>e.<br>ent plug up to surface. W   | <ul><li>'. This will lead</li><li>'. WOC and</li><li>VOC and tag</li></ul>   | ave a plug acro<br>tag plug, reset i  | ss Glorieta top.<br>f necessary.<br>cessary. This         |   |
| 7. Load hole with plugging mud<br>will leave 150' surface plug.<br>8. Remove all surface equipme  | d and spot 150' ceme<br>surface casing shoe<br>d and spot 150' ceme<br>ent and weld dry hole  | ent plug from 2024'-2144'<br>ent plug from 1103'-1253'<br>e.<br>ent plug up to surface. We<br>e marker per regulations.   | '. This will lead '. WOC and tag  SEE A  | ave a plug acrost<br>tag plug, reset i<br>plug, reset if ne<br>TTACHED                        | ss Glorieta top.<br>f necessary.<br>cessary. This         |   |
| 7. Load hole with plugging mudwill leave 150' surface plug. 8. Remove all surface equipme NOTE: Yates Petroleum Corpora 1 hereby certify that the foregoing is true   | d and spot 150' ceme<br>surface casing shoe<br>d and spot 150' ceme<br>ent and weld dry hole<br>ation will use steel pits   | ent plug from 2024'-2144'<br>ent plug from 1103'-1253'<br>e.<br>ent plug up to surface. We<br>e marker per regulations.   | '. This will lead '. WOC and tag  SEE A  | ave a plug acrost<br>tag plug, reset i<br>plug, reset if ne<br>TTACHED                        | ss Glorieta top. f necessary. cessary. This FOR           |   |
| 7. Load hole with plugging mudwill leave 150' surface plug. 8. Remove all surface equipme NOTE: Yates Petroleum Corporal Interest Certify that the foregoing is true Name (Printed/Typed)   | d and spot 150' ceme<br>surface casing shoe<br>d and spot 150' ceme<br>ent and weld dry hole<br>ation will use steel pits<br>and correct  | ent plug from 2024'-2144' ent plug from 1103'-1253' e. ent plug up to surface. We marker per regulations. and no earth pits   | '. This will lead to the cond  | ave a plug acrost<br>tag plug, reset if<br>plug, reset if ne<br>TTACHED<br>DITIONS O          | ss Glorieta top. f necessary. cessary. This FOR           |   |
| <ul> <li>7. Load hole with plugging mudwill leave 150' surface plug.</li> <li>8. Remove all surface equipme NOTE: Yates Petroleum Corpora</li> <li>1 I hereby certify that the foregoing is true</li> </ul>   | d and spot 150' ceme<br>surface casing shoe<br>d and spot 150' ceme<br>ent and weld dry hole<br>ation will use steel pits<br>and correct  | ent plug from 2024'-2144' ent plug from 1103'-1253' e. ent plug up to surface. We marker per regulations. and no earth pits   | '. This will lead to the cond  | ave a plug acrost<br>tag plug, reset i<br>plug, reset if ne<br>TTACHED                        | ss Glorieta top. f necessary. cessary. This FOR           |   |
| <ul> <li>7. Load hole with plugging mudwill leave 150' surface plug.</li> <li>8. Remove all surface equipme NOTE: Yates Petroleum Corpora</li> <li>14 Thereby certify that the foregoing is true Name (Printed/Typed)</li> </ul>  | d and spot 150' ceme<br>surface casing shoe<br>d and spot 150' ceme<br>ent and weld dry hole<br>ation will use steel pits<br>and correct  | ent plug from 2024'-2144' ent plug from 1103'-1253' e. ent plug up to surface. We marker per regulations. and no earth pits   | '. This will lead to the condition of th | ave a plug acrost<br>tag plug, reset if<br>plug, reset if ne<br>TTACHED<br>DITIONS O          | ss Glorieta top. f necessary. cessary. This FOR           |   |
| 7. Load hole with plugging mudwill leave 150' surface plug. 8. Remove all surface equipme NOTE: Yates Petroleum Corporal Interest Certify that the foregoing is true Name (Printed/Typed)  Tina Hu  | d and spot 150' ceme surface casing shoe and spot 150' ceme ent and weld dry hole ation will use steel pits and correct uerta   | ent plug from 2024'-2144'ent plug from 1103'-1253'e. ent plug up to surface. We marker per regulations. and no earth pits  Title Regula   | '. This will lead to the condition of th | ave a plug acrost tag plug, reset if ne TTACHED DITIONS Of the Supervisor                     | ss Glorieta top. f necessary. cessary. This FOR           |   |
| 7. Load hole with plugging mudwill leave 150' surface plug. 8. Remove all surface equipme NOTE: Yates Petroleum Corporal Interest Certify that the foregoing is true Name (Printed/Typed)  Tina Hu  | d and spot 150' ceme surface casing shoe and spot 150' ceme ent and weld dry hole ation will use steel pits and correct uerta   | ent plug from 2024'-2144' ent plug from 1103'-1253' e. ent plug up to surface. We e marker per regulations. and no earth pits  Title Regula  Date April 5,  | '. This will lead to the condition of th | ave a plug acrostag plug, reset in plug, reset if ne TTACHED DITIONS Of the Supervisor PPROVE | ss Glorieta top. f necessary.  cessary. This FOR FAPPROVA |   |
| 7. Load hole with plugging much will leave 150' surface plug. 8. Remove all surface equipme NOTE: Yates Petroleum Corporal 4. I hereby certify that the foregoing is true Name (Printed/Typed)  Tina Hu  Signature  Approved by  Conditions of approval, if any, are attached certify that the applicant holds/fegal or equipment of the principle of the | and spot 150' cemes surface casing shoet and spot 150' cemes and spot 150' cemes and weld dry hole attion will use steel pits and correct userta  Approval of this notice doe attable title to those rights in operations thereon | ent plug from 2024'-2144'ent plug from 1103'-1253'e. ent plug up to surface. We marker per regulations. and no earth pits  Title Regula  Date April 5,  FOR FEDERAL OR STATE OF  The subject lease Office | '. This will lead to the condition of th | ave a plug acrostag plug, reset in plug, reset if ne TTACHED DITIONS OF THE PROVENCE PROVE    | ss Glorieta top. f necessary.  cessary. This FOR FAPPROVA |   |
| 7. Load hole with plugging mud will leave 150' surface plug. 8. Remove all surface equipme NOTE: Yates Petroleum Corporal Inhereby certify that the foregoing is true Name (Printed/Typed)  Tina Hussignature   | and spot 150' cemes surface casing shoet and spot 150' cemes and spot 150' cemes and weld dry hole attion will use steel pits and correct userta  Approval of this notice doe attable title to those rights in operations thereon | ent plug from 2024'-2144'ent plug from 1103'-1253'e. ent plug up to surface. We marker per regulations. and no earth pits  Title Regula  Date April 5,  FOR FEDERAL OR STATE OF  The subject lease Office | '. This will lead to the condition of th | ave a plug acrostag plug, reset in plug, reset if ne TTACHED DITIONS OF THE PROVENCE PROVE    | ss Glorieta top. f necessary.  cessary. This FOR FAPPROVA |   |

WELL NAME: Saguaro AGS Fed Com #6 FIELD: Dagger Draw LOCATION: 1,980' FNL & 1,980' FEL of Section 11-20S-24E Eddy Co., NM **GL**: 3,615' **ZERO**: 14' KB: 3,629' **CASING PROGRAM** SPUD DATE: 11/9/90 COMPLETION DATE: 1/6/91 COMMENTS: API No.: 30-015-264940 9-5/8" 36# J-55 1,203' 7" 26# J-55 LT&C 96' 7" 23# N-80 LT&C 872 ' 7" 23# J-55 LT&C 3,756' 7" 26# J-55 LT&C 2,881' 7" 26# N-80 LT&C 565' 8,210' 14-3/4" Hole **Before** 9-5/8" @ 1,203' w/950 sx (Circ) **TOPS** 8-3/4" Hole SA 515' Glorieta 2.094 Yeso 2,173' BS Lm 3,332' Abo 5,080' Canyon Ls 7,556' Canyon Dolo 7,658' DV tool @ 5,308' Canyon Perfs: 7,690-7,758' (44); 7,785-97' 914) 7" @ 8,210' w/ Not to Scale 1<sup>st</sup> Stage: 1000 sx (Circ) 2/25/10 PBTD: 8,145' 2<sup>nd</sup> Stage: 1200 sx (Circ) DC/Hill TD: 8,210'

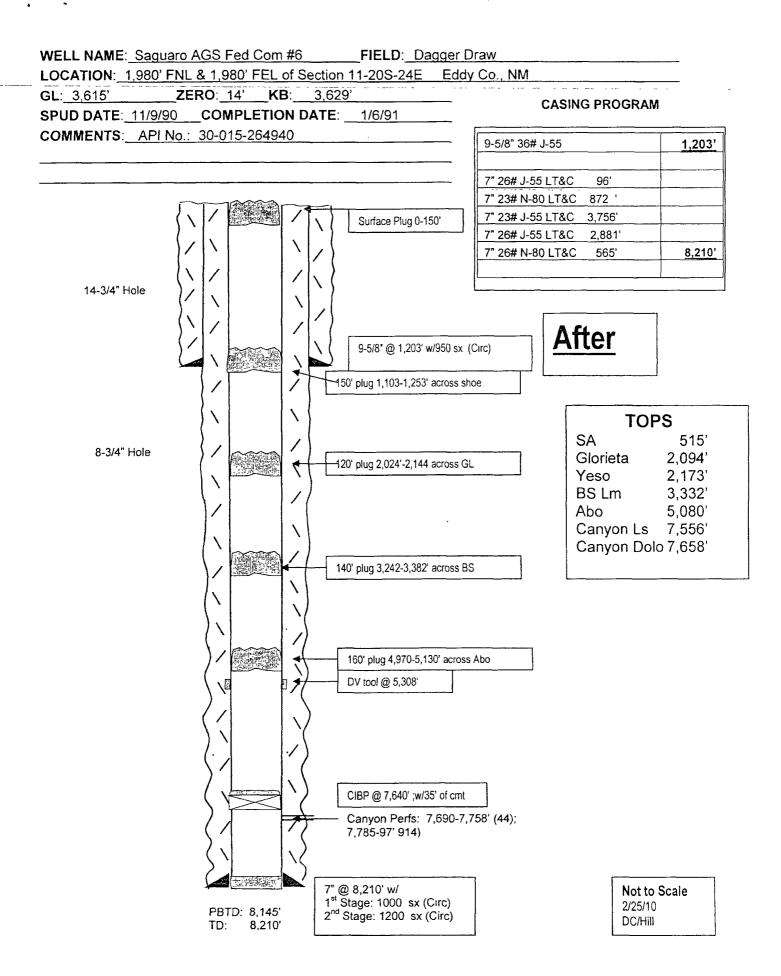

Yates Petroleum Corporation NM-043625: Saguaro AGS Federal Com #6 API: 30-015-26494 Eddy County, New Mexico

RE: Plugging and Abandonment Requirements, Conditions of Approval

H2S monitoring equipment is to be on site. All plugs are to be a minimum 25 sx.

- 1. OK
- 2. Cement should be Class H Otherwise OK (Perfs)
- 3. Change: Spot a plug from 5360'-5030' (minimum 25sx). WOC and tag at 5030' or shallower. (DV Tool Wolfcamp Abo)
- 4. OK (Bone Spring)
- 5. OK (Glorietta)
- 6. Tag at 1103' or shallower Otherwise OK (Casing shoe)
- 7. CHANGE: Spot the plug from 400' and fill casing to surface. (Cave/Karst Surface)
- 8. Verify Cement to surface in all annuluses Otherwise OK.
- 9. Submit a subsequent report to the BLM.

See attached standard COAs.

DHW 041110

#### **BUREAU OF LAND MANAGEMENT**

Carlsbad Field Office 620 East Greene Street Carlsbad, New Mexico 88220 575-234-5972

#### Permanent Abandonment of Federal Wells Conditions of Approval

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within <u>ninety (90)</u> days from the approval date of this Notice of Intent to Abandon.

If you are unable to plug the well by the 90<sup>th</sup> day provide this office, prior to the 90<sup>th</sup> day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.

The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.

- 2. <u>Notification:</u> Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Eddy County, call 575-361-2822; Lea County, call 575-393-3612.
- 3. <u>Blowout Preventers</u>: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.
- 4. <u>Mud Requirement:</u> Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of **brine** water. Minimum nine (9) pounds per gallon.
- 5. <u>Cement Requirement</u>: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. In lieu of a cement plug in a cased hole, a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. Any plug that requires a tag will have a minimum WOC time of 4 hours.

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

- 6. <u>Dry Hole Marker</u>: All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). **The BLM is to be notified when the wellhead is cut off to verify that cement is to surface in the casing and all annuluses.** The well bore shall then be capped with a 4-inch pipe, 10-feet in length, 4 feet above ground and embedded in cement. The following information shall be permanently inscribed on the dry hole marker: well name and number, name of the operator, lease serial number, surveyed location (quarter-quarter section, section, township and range or other authorized survey designation acceptable to the authorized officer such as metes and bounds).
- 7. <u>Subsequent Plugging Reporting:</u> Within 30 days after plugging work is completed, file one original and five copies of the Subsequent Report of Abandonment, Form 3160-5 to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. **Show date well was plugged.**
- 8. <u>Trash:</u> All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration will be required. See attached reclamation procedure.

DHW 112309



### **United States Department of the Interior**

**BUREAU OF LAND MANAGEMENT** 

Carlsbad Field Office 620 E. Greene St. Carlsbad, New Mexico 88220-6292 www.blm.gov/nm



In Reply Refer To: 1310

#### **Reclamation Objectives and Procedures**

Reclamation Objective: Oil and gas development is one of many uses of the public lands and resources. While development may have a short- or long-term effect on the land, successful reclamation can ensure the effect is not permanent. During the life of the development, all disturbed areas not needed for active support of production operations should undergo "interim" reclamation in order to minimize the environmental impacts of development on other resources and uses. At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land and water are restored.

The long-term objective of final reclamation is to set the course for eventual ecosystem restoration, including the restoration of the natural vegetation community, hydrology, and wildlife habitats. In most cases this means returning the land to a condition approximating or equal to that which existed prior to the disturbance. The final goal of reclamation is to restore the character of the land and water to its predisturbance condition. The operator is generally not responsible for achieving full ecological restoration of the site. Instead, the operator must achieve the short-term stability, visual, hydrological, and productivity objectives of the surface management agency and take steps necessary to ensure that long-term objectives will be reached through natural processes.

To achieve these objectives, remove any and all contaminants, scrap/trash, equipment, pipelines and powerlines. Strip and remove caliche, contour the location to blend with the surrounding landscape, redistribute the native soils, provide erosion control as needed, rip and seed as specified in the original APD COA. This will apply to well pads, facilities, and access roads. Barricade access road at the starting point. If reserve pits have not reclaimed due to salts or other contaminants, submit a plan for approval, as to how you propose to provide adequate restoration of the pit area.

- 1. The Application for Permit to Drill or Reenter (APD, Form 3160-3), Surface Use Plan of Operations must include adequate measures for stabilization and reclamation of disturbed lands. Oil and Gas operators must plan for reclamation, both interim and final, up front in the APD process as per Onshore Oil and Gas Order No. 1.
- 2. For wells and/or access roads not having an approved plan, or an inadequate plan for surface reclamation (either interim or final reclamation), the operator must submit a proposal describing the procedures for reclamation. For interim reclamation, the appropriate time for submittal would be when filing the Well Completion or Recompletion Report and Log (Form 3160-4). For final reclamation, the appropriate time for submittal would be when filing the Notice of Intent, or the Subsequent Report of Abandonment, Sundry Notices and Reports on Wells (Form 3160-5). Interim reclamation is to be completed within 6 months of well completion, and final reclamation is to be completed within 6 months of well abandonment.
- 3. The operator must file a Subsequent Report Plug and Abandonment (Form 3160-5) following the plugging of a well.
- 4. Previous instruction had you waiting for a BLM specialist to inspect the location and provide you with reclamation requirements. If you have an approved Surface Use Plan of Operation and/or an approved Sundry Notice, you are free to proceed with reclamation as per approved APD. If you have issues or concerns, contact a BLM specialist to assist you. It would be in your interest to have a BLM specialist look at the location and access road prior to the removal of reclamation

- equipment to ensure that it meets BLM objectives. Upon conclusion submit a Form 3160-5, Subsequent Report of Reclamation. This will prompt a specialist to inspect the location to verify work was completed as per approved plans.
- 5. The approved Subsequent Report of Reclamation will be your notice that the native soils, contour and seedbed have been reestablished. If the BLM objectives have not been met the operator will be notified and corrective actions may be required.
- 6. It is the responsibility of the operator to monitor these locations and/or access roads until such time as the operator feels that the BLM objective has been met. If after two growing seasons the location and/or access roads are not showing the potential for successful revegetation, additional actions may be needed. When you feel the BLM objectives have been met submit a Final Abandonment Notice (FAN), Form 3160-5, stating that all reclamation requirements have been achieved and the location and/or access road is ready for a final abandonment inspection.
- 7. At this time the BLM specialist will inspect the location and/or access road. If the native soils and contour have been restored, and the revegetation is successful, the FAN will be approved, releasing the operator of any further liability of the location and/or access road. If the location and/or access road have not achieved the objective, you will be notified as to additional work needed or additional time being needed to achieve the objective.

If there are any questions, please feel free to contact any of the following specialists:

Jim Amos Supervisory Environmental Protection Specialist 575-234-5909, 575-361-2648 (Cell)

Terry Gregston Environmental Protection Specialist 575-234-5958

Bobby Ballard Environmental Protection Specialist 575-234-2230

Randy Rust Environmental Protection Specialist 575-234-5943

Linda Denniston Environmental Protection Specialist 575-234-5974

Jennifer Van Curen Environmental Protection Specialist 575-234-5905

Justin Frye Environmental Protection Specialist 575-234-5922 Cody Layton Natural Resource Specialist 575-234-5959

Trishia Bad Bear Natural Resource Specialist 575-393-3612

Todd Suter Surface Protection Specialist 575-234-5987

Doug Hoag Civil Engineering Technician 575-234-5979