

58

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

PERMIT IN TRIPlicate
INSTRUCTIONS
V-100 (11-82)

LEASE DESIGNATION AND SERIAL NO.
NM 261

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT" for (HSA, stoppage.)

1. OIL WELL ☒ GAS WELL ☐ ☐ THER ☐	2. NAME OF OPERATOR Enron Oil & Gas Company	3. ADDRESS OF OPERATOR P. O. Box 2267, Midland, Texas 79702	4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements. See also space 17 below.) At surface 660' FSL & 1980' FWL	5. ELEVATIONS (Show whether of F., M., or G.L.) 3642.5' GL	6. PERMIT NO. 30 015 23069	7. UNIT ACREMENT NAME	8. FARM OR LEASE NAME Canadian Kenwood Federal	9. WELL NO. 1	10. FIELD AND POOL, OR WILDCAT Shugart, North Bone Spring	11. SEC., T., R., M., OR B.L. AND COUNTY OF AREA Sec 17, T18S, R31E	12. COUNTY OR PARISH, STATE Eddy NM
--	--	--	--	---	-------------------------------	-----------------------	---	------------------	--	---	--

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
TEST WATER SHUT-OFF ☐	PULL OR ALTER CASING ☐	WATER SHUT-OFF ☐	REPAIRING WELL ☐
FRACURE TREAT ☐	MULTIPLE COMPLETION ☐	FRACURE TREATMENT ☐	ALTERING CASING ☐
SHOOT OR ACIDIZE ☐	ABANDON* ☐	SHOOTING OR ACIDIZING ☐	ABANDONMENT* ☒
REPAIR WELL ☐	CHANGE PLANS ☐	(Other) ☐	(Other) ☐

(NOTE: Report results of multiple completion or Well Completion or Recaptulation Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details and give pertinent data, including estimated date of starting and proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and bottom points to this work.)

6-13-92 - Set CIBP at 8600'
Cut 5-1/2" csg off at 8310'
Upon shooting csg off, WL tools were pushed back up hole 80' causing WL to get up around bottom tools.
Left following items in hole
1 7/16" rope socket
1 11/16" collar locator
5' x 2" OD contact bar
1 3/8" jet cutter adapter sub &
Approx 4'-6' of WL

Approved as to plugging of the well bore.
Liability under bond is retained until
surface restoration is completed.

6-16-92 - Tagged CIBP at 8600' & pumped 54 sack cement plug at 8600' (C1 H + 2% CaCl, 16 ppg)
Cement plug set from back up to 8202' (398') - tagged at 8202'

Pumped 60 sack cement plug at 5850' (C1 H, 16.0 ppg) - plug 5850 back up to 5750' (100').

Pumped 55 sack plug at 4570' (C1 H + 2% CaCl, 16.0 ppg).

6-17-92 - Tagged cement plug at 4485'
Spotted 15 sack cement plug from 50' back to surface (C1 H, 16.0 ppg).
Welded on dry hole marker. WELL P&A

DESIGNED BY <u>Berry Gildon</u>	TITLE <u>Regulatory Analyst</u>	DATE <u>6/22/92</u>
APPROVED BY <u>[Signature]</u>	TITLE <u>PERMISSION ENGINEER</u>	DATE <u>7-2-92</u>

CONDITIONS OF APPROVAL, IF ANY:


*See Instructions on Reverse Side

It is the policy of the Bureau of Land Management to make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

ENRON OIL & GAS
N. SUGAR (BONE SPRINGS)
TO: JAMES POTR: 11,500'
GL: 3,648' KB: 3636

CANADIAN KENTON No. 1
1980' FUL. & 640' FUL.
SECTION 17, T-18-S-A-21-S
EDDY COUNTY, NEW MEXICO

SPUD: 11-18-79
COMP: 1-3-80.

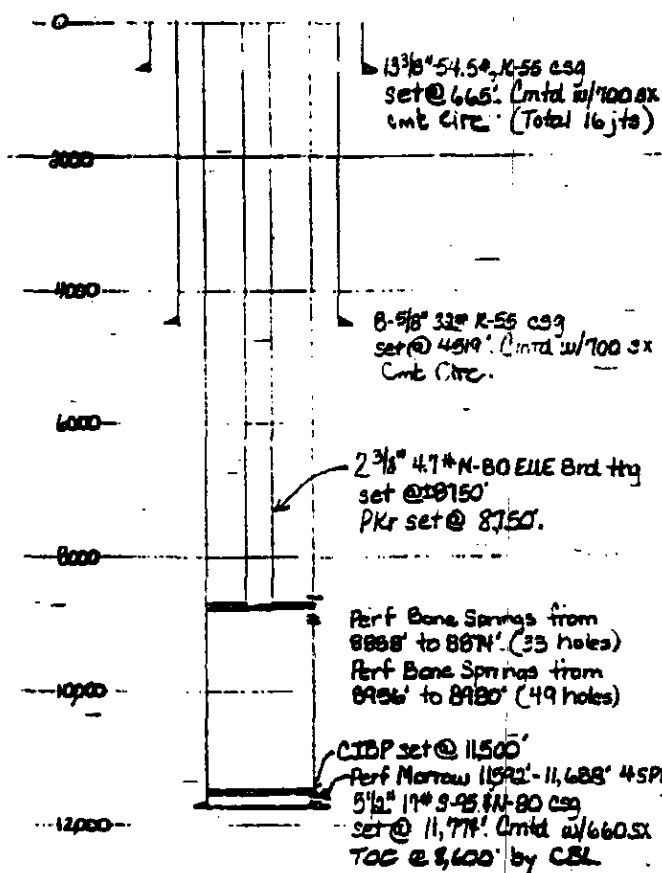

Completion History
Run 8-3/8\"/>

YM
192