

RECEIVED

DISTRICT I
1625 N. French Dr., Hobbs, NM 88240

DISTRICT II
1301 W. Grand Avenue, Artesia, NM 88203

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

DISTRICT IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

OCT 04 2010

State of New Mexico
Energy, Minerals and Natural Resources Department

Form C-102
Revised July 16, 2010

Submit one copy to appropriate
District Office

OIL CONSERVATION DIVISION

1220 South St. Francis Dr.
Santa Fe, New Mexico 87505

WELL LOCATION AND ACREAGE DEDICATION PLAT

☐ AMENDED REPORT

API Number 30-015-38220	Pool Code 96210	Pool Name Empire; Glorieta-Yeso
Property Code 38305	Property Name CRUISER "5" STATE	Well Number 2
OGRID No. 162683	Operator Name CIMAREX ENERGY CO. OF COLORADO	Elevation 3647'

Surface Location


UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
E	5	17 S	29 E		1850	NORTH	990	WEST	EDDY

Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County

Dedicated Acres 40	Joint or Infill	Consolidation Code	Order No.
-----------------------	-----------------	--------------------	-----------

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

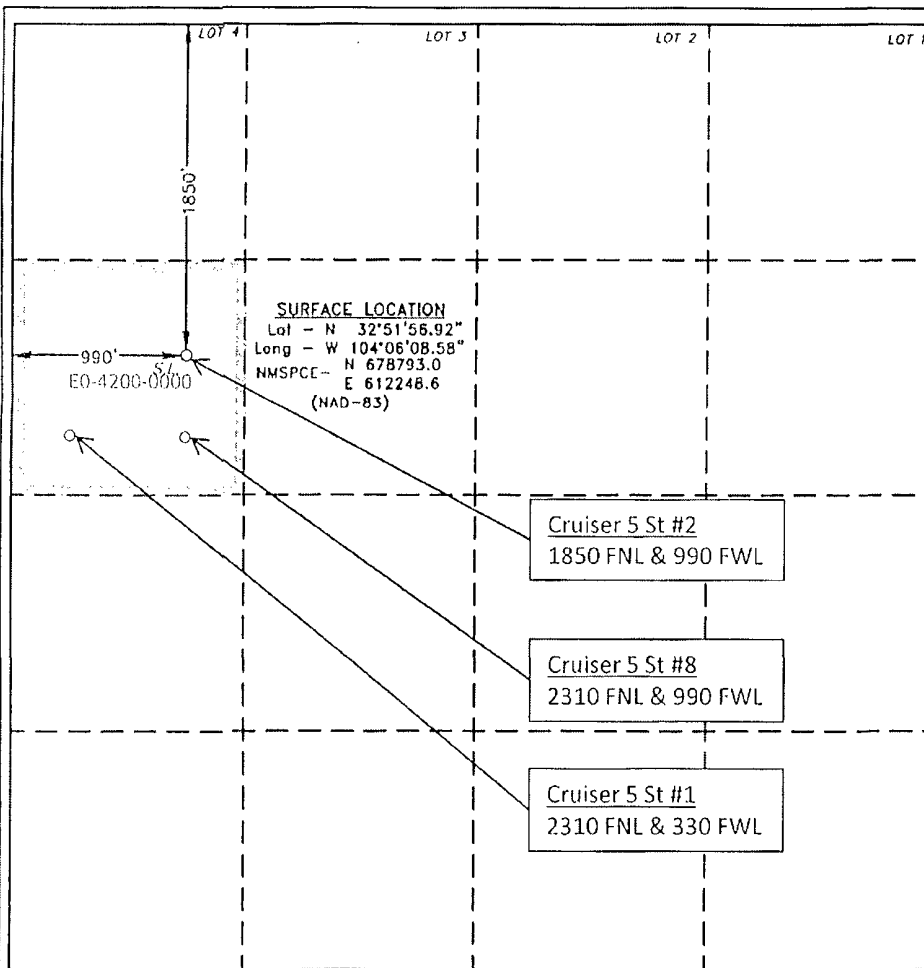

OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Zeno Farris 10/1/2010
Signature Date

Zeno Farris
Printed Name
zfarris@cimarex.com
Email Address

SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision and that the same is true and correct to the best of my belief.

Date Surveyed 10/1/2010
Signature [Signature] Seal of Professional Surveyor
[Seal]

Certificate No. Gary L. Jones 7977

BASIN SURVEYS 23168



Cimarex Energy Co. of Colorado

600 N. Marientfeld St. ♦ Suite 400 ♦ Midland, TX 79701 ♦ (432) 571-7800 ♦ Fax (432) 620-1940
A subsidiary of Cimarex Energy Co. • A NYSE Listed Company • "XEC"

October 1, 2010

Oil Conservation Division
District II Office
1301 W. Grand Ave.
Artesia, New Mexico 88210
Attn: Ms. Linda Bratcher

Re: Statewide Rule 118
Hydrogen Sulfide Gas Contingency Plan
Proposed Cruiser 5 State No. 2 Well

Dear Ms. Bratcher:

In accordance with NMAC 19.15.3.118 C. (1) governing the determination of the hydrogen sulfide concentration in gaseous mixtures in each of its operations, Cimarex Energy Co. of Colorado does not anticipate that there will be enough H₂S from the surface to the Blinbry formations to meet the OCD's minimum requirements for the submission of a contingency plan for the drilling and completion of the following test(s):

Cruiser 5 State No. 2
5-17S-29E
1850 FNL & 990 FWL
Eddy County, NM

If anything further is needed regarding this issue, or if you have any questions, please feel free to contact the undersigned at 432-620-1938.

Yours truly,

A handwritten signature in black ink that reads "Zeno Farris". The signature is written in a cursive, flowing style.

Zeno Farris
Manager Operations Administration

Mud, Casing, Cementing, and BOP Attachment
Cruiser 5 State No. 2
Cimarex Energy Co. of Colorado
Unit E, Section 5
T17S-R29E, Eddy County, NM

In response to questions asked under Section II B of Bulletin NTL-6, the following information is provided for your consideration:

Location: 1850 FNL & 990 FWL

Elevation above sea level: 3647' GR

Proposed drilling depth: 6000'

Proposed Mud Circulating System:

Depth			Mud Wt	Visc	Fluid Loss	Type Mud
0'	to	450'	8.4 - 8.6	28	NC	FW
0'	to	1100'	10.0	30-32	NC	Brine water
0'	to	6000'	8.4 - 9.5	30-32	NC	FW, brine

Sufficient mud materials will be kept on location at all times in order to combat lost circulation or unexpected kicks. In order to run DSTs, open hole logs, and casing, the viscosity and water loss may have to be adjusted in order to meet these needs.

Mud, Casing, Cementing, and BOP Attachment
Cruiser 5 State No. 2
 Cimarex Energy Co. of Colorado
 Unit E, Section 5
 T17S-R29E, Eddy County, NM

Casing & Cementing Plan:

String	Hole Size	Depth	Casing OD	Weight	Collar	Grade
<i>Surface</i>	16"	0' to 450'	New 11½"	42#	STC	H-40
<i>Intermediate</i>	11"	0' to 1100'	New 8⅝"	24#	STC	J-55
<i>Production</i>	7⅝"	0' to 6000'	New 5½"	17#	LTC	P-110

Cementing Plan:

Surface	530 sx Class H + 2% CaCl ₂ (wt 14.8, yld 1.34) TOC Surface
Intermediate	<u>Lead:</u> 300 sx Class C Lite + 6# Salt + 1/4# CF (wt 12.7, yld 1.99) <u>Tail:</u> 200 sx Class C + 2% CaCl ₂ (wt 14.8, yld 1.34) TOC Surface
Production	Stage 1 580 sx 50/50/2 Class C + 1% FL25 + 0.3% FL52 + 5% Salt + 0.5% SMS (wt 13, yld 1.68) Stage 2 <u>Lead:</u> 550 sx Class H Lite + 6# Salt + 1/4# CF (wt 12.7, yld 1.92) <u>Tail:</u> 200 sx Class H + 2% CaCl ₂ (wt 13, yld 1.68) TOC 900'

Fresh water zones will be protected by setting 11½" casing at 450' and cementing to surface. Hydrocarbon zones will be protected by setting 8⅝" casing at 1100' and cementing to surface, and by setting 5½" casing at 6000' and cementing to 900.'

<u>Collapse Factor</u>	<u>Burst Factor</u>	<u>Tension Factor</u>
1.125	1.125	1.6

Pressure control Equipment:

An 11½" 3000 PSI working pressure B.O.P. consisting of a one set of blind rams and one set of pipe rams and a 3000 psi annular-type preventor. A choke manifold and 120 gallon accumulator with floor and remote operating stations and auxiliary power system. A kelly cock will be installed and maintained in operable condition and a drill string safety valve in the open position will be available on the rig floor. Test BOP equipment and choke manifold to 250 psi low and 3000 psi high and annular BOP to 250 psi low and 1500 psi high by an independent service company.

BOP unit will be hydraulically operated. Below intermediate casing shoe, BOP will be operated at least once a day while drilling and the blind rams will be operated when out of hole during trips. No abnormal pressure or temperature is expected while drilling. From the base of the surface pipe through the running of production casing, the well will be equipped with a 3000 psi BOP system.

BOPS will be tested by an independent service company to 250 psi low and 3000 psi high. Hydril will be tested to 250 psi low and 1500 psi high.