


U. S. LAND OFFICE Las Cruces  
SERIAL NUMBER 028992 A  
LEASE OR PERMIT TO PROSPECT \_\_\_\_\_

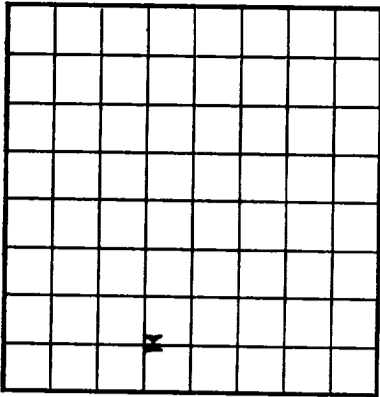

LOCATE WELL CORRECTLY

UNITED STATES 30-015-04290  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

LOG OF OIL OR GAS WELL

Company ROLAND RICH WOOLLEY Address Box 398, Loco Hills  
Lessor or Tract Roland Rich Woolley Field Premier State New Mexico  
Well No. 6-A Sec. 23 T. 17 R. 30 Meridian N.M.P.M. County Sady  
Location 660 ft. (N/S) of S. Line and 1980 (E/W) of W. Line of Sec. 23 Elevation 3652'  
(Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Signed J. P. Bricez Title Superintendent  
Date \_\_\_\_\_

The summary on this page is for the condition of the well at above date.

Commenced drilling March 5, 19 44 Finished drilling April 10, 19 44

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1, from 1950' to 1955' No. 4, from \_\_\_\_\_ to \_\_\_\_\_  
No. 2, from 1982' to 1985' No. 5, from \_\_\_\_\_ to \_\_\_\_\_  
No. 3, from \_\_\_\_\_ to \_\_\_\_\_ No. 6, from \_\_\_\_\_ to \_\_\_\_\_

IMPORTANT WATER SANDS

No. 1, from 505' to half full water No. 3, from \_\_\_\_\_ to \_\_\_\_\_  
No. 2, from \_\_\_\_\_ to \_\_\_\_\_ No. 4, from \_\_\_\_\_ to \_\_\_\_\_

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From-	To-	
8"	24#	8V	used	512'	plain				
7"	20#	8V	Beta	1921'	packer			top of packer	

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
8"	512'	50	Halliburton		top to bottom
7"	1921'	100	"		" " "

PLUGS AND ADAPTERS

Heaving plug—Material \_\_\_\_\_ Length \_\_\_\_\_ Depth set \_\_\_\_\_  
Adapters—Material \_\_\_\_\_ Size \_\_\_\_\_

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out
	5" & 3 1/2"	Glycerine	100 qts	4/14/44	1942'-92'	bottom

TOOLS USED

Rotary tools were used from \_\_\_\_\_ feet to \_\_\_\_\_ feet, and from \_\_\_\_\_ feet to \_\_\_\_\_ feet  
Cable tools were used from \_\_\_\_\_ 0 feet to 1927' feet, and from \_\_\_\_\_ feet to \_\_\_\_\_ feet

DATES

Put to producing April 16, 19 \_\_\_\_\_

The production for the first 24 hours was 50 barrels of fluid of which 100 % was oil; \_\_\_\_\_ % emulsion; \_\_\_\_\_ % water; and \_\_\_\_\_ % sediment. Gravity, °Bé. 37.10

If gas well, cu. ft. per 24 hours \_\_\_\_\_ Gallons gasoline per 1,000 cu. ft. of gas \_\_\_\_\_  
Rock pressure, lbs. per sq. in. \_\_\_\_\_

EMPLOYEES

Grever Pratt, Driller \_\_\_\_\_, Driller  
\_\_\_\_\_, Driller \_\_\_\_\_, Driller

FORMATION RECORD

FROM-	TO-	TOTAL FEET	FORMATION
0	325	325	Red beds
325	400	75	Anhydrite
400	500	100	Red beds
500	505	5	Anhydrite
505	512	7	Salt
512	1195	683	Salt
1195	1921	726	Anhydrite
1921	1955	34	" & broken lime
1955	1997	42	" , lime & broken sand
1997	Total depth		

