
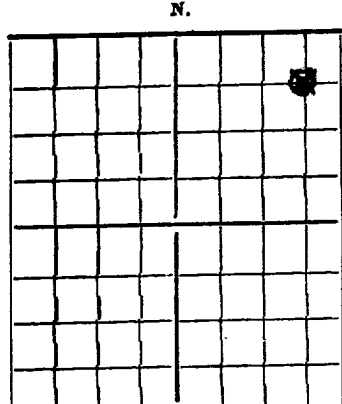


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

30-015-04350



AREA 640 ACRES LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

PATON BROS & SERGENT

ARTESIA, NEW MEXICO.

Sergent

Well No. 2

in NE 1/4

of Sec. 27

T. 17S

R 30E, N. M. P. M., Grayburg-Jackson Field, Eddy County.

Well is 660 feet south of the North line and 660 feet west of the East line of

If State land the oil and gas lease is No. Assignment No.

If patented land the owner is Address

If Government land the permittee is Address

The Lessee is Paul Sergent Address

Drilling commenced November 28th 1942 Drilling was completed January 21st, 1943

Name of drilling contractor PATON BROS. Address Artesia, N. Mex.

Elevation above sea level at top of casing 3641 feet.

The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 3148 to 3158 No. 4, from to

No. 2, from 3175 to 3188 No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

Table with columns: SIZE, WEIGHT PER FOOT, THREADS PER INCH, MAKE, AMOUNT, KIND OF SHOE, CUT & FILLED FROM, PERFORATED FROM TO, PURPOSE

MUDDING AND CEMENTING RECORD

Table with columns: SIZE OF HOLE, SIZE OF CASING, WHERE SET, NO. SACKS OF CEMENT, METHOD USED, MUD GRAVITY, AMOUNT OF MUD USED

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

Table with columns: SIZE, SHELL USED, EXPLOSIVE OR CHEMICAL USED, QUANTITY, DATE, DEPTH SHOT OR TREATED, DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet

Cable tools were used from 0 feet to 3194 feet, and from feet to feet

PRODUCTION

Put to producing Jan. 21, 1943

The production of the first 24 hours was 235 barrels of fluid of which 100 % was oil; % emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours slight Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

Claud Edmonds, Driller Harold Hancox, Driller

V. H. Willey, Driller C. A. Newbart, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this day of 19

Notary Public. Name Position

Representing Company or Operator

My Commission expires Aug 14, 1946 Address

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	15		Gyp.
15	35		Red Bed
35	375		Gyp
375	425		Red Rock
425	460		Red Bed.
460	1210		Salt
1210	1245		Anhydrite
1245	1275		Anhydrite & Red Rock
1275	1915		Anhydrite
1915	1935		Brown Lime
1935	1950		Oil Showing
1950	1965		Anhydrite
1965	1970		Showing of Oil
1970	2370		Anhydrite
2370	2420		Red Sand
2420	2445		Anhydrite
2445	2465		Broken Lime
2465	2545		Anhydrite
2545	2555		Lime
2555	2795		Anhydrite
2795	2857		Gray Lime
2857	3175		Lime
3148	3158		Oil and Gas
3175	3188		Oil