


NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

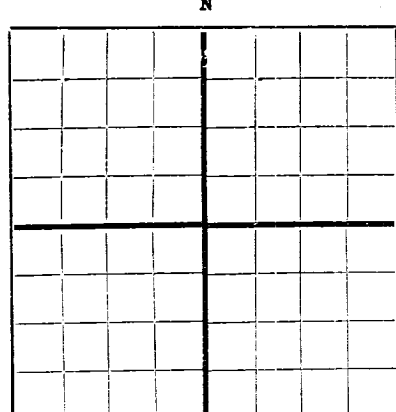

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Stanley L. Jones, Inc.

Box 104, Artesia, New Mexico

State 16 Company or Operator SE E Address 26 18S
 Well No. 16 in 330 of Sec. 26 T. 18S
 Lease 27E, N. M. P. M. Artesia Field, Eddy County
 Well is 1650 feet south of the North line and 330 feet west of the East line of S. C. 26, R 27E, T 18S
 If State land the oil and gas lease is No. E-11083 Assignment No. 10
 If patented land the owner is _____ Address _____
 If Government land the permittee is _____ Address _____
 The Lessee is _____ Address _____
 Drilling commenced April 27 1950 Drilling was completed June 5 1950
 Name of drilling contractor Brewer Drilling Co. Address Artesia, New Mexico
 Elevation above sea level at top of casing _____ feet.
 The information given is to be kept confidential until _____ 19____.

OIL SANDS OR ZONES

No. 1, from 1903 to 1912 No. 4, from _____ to _____
 No. 2, from 1885 to 1950 No. 5, from _____ to _____
 No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.
 No. 1, from 190 to 195 feet.
 No. 2, from 1982 to 1986 feet.
 No. 3, from _____ to _____ feet.
 No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
10"				229					
7				1778					

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
	7	1771	50			

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
 Adapters — Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		DuPont	310 lbs	5-31-50	1885-1950	1970

Results of shooting or chemical treatment no increase in oil

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet
 Cable tools were used from 0 feet to 1986 feet, and from _____ feet to _____ feet.

PRODUCTION

Put to producing _____, 19____.
 The production of the first 24 hours was _____ barrels of fluid of which _____% was oil; _____% emulsion; _____% water; and _____% sediment. Gravity, Be _____
 If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
 Rock pressure, lbs. per sq. in. _____

EMPLOYEES

Ray Bunkhart, Driller Carl Howell, Driller
W. C. Cox, Driller _____, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.


Subscribed and sworn to before me this 28th _____ Place _____ Date _____
 day of June, 1950 Name _____
 _____ Position _____
 _____ Notary Public Representing _____

My Commission expires 2-19-52

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	35	35	caliche
35	110	75	red bed
110	175	65	shale
175	185	10	gyp
185	235	50	red shale Water 190-195
235	365	130	anhydrite
365	385	20	red shale
385	430	45	anhydrite and red shale
430	438	8	anhydrite, broken
438	570	32	anhydrite
570	610	40	anhydrite, broken
610	775	165	anhydrite
775	800	25	lime and anhydrite
800	830	30	anhydrite and lime shells
830	855	25	anhydrite and broken lime
855	880	25	anhydrite and lime
880	945	65	anhydrite
945	955	10	lime and anhydrite
955	1054	99	anhydrite
1054	1065	11	anhydrite and red XXXX sand
1065	1085	20	anhydrite broken
1085	1290	205	anhydrite
1290	1305	15	anhydrite and red rock
1305	1315	10	red sand
1315	1460	145	anhydrite
1460	1470	10	lime, grey and anhydrite
1470	1480	10	lime, brown and sandy
1480	1515	35	anhydrite
1515	1545	30	anhydrite and brown sandy lime
1545	1563	18	anhydrite and grey sand
1563	1585	22	anhydrite
1585	1620	35	anhydrite and brown sandy lime
1620	1655	35	anhydrite and brown lime
1655	1661	6	lime, grey
1661	1680	19	lime, broken
1680	1695	15	XXXXXX anhydrite and sandy brown lime
1695	1705	10	lime, grey
1705	1720	15	sandy lime, broken
1720	1759	39	lime, grey
1759	1785	26	lime
1785	1797	12	lime, grey
1797	1823	26	lime
1823	1832	9	lime, white
1832	1858	26	lime
1858	1863	5	lime, grey
1863	1873	10	lime, grey and sandy
1873	1885	12	lime, grey
1885	1898	13	lime
1898	1912	14	lime, sandy 1903-12 oil show
1912	1926	14	lime, grey
1926	1937	11	lime
1937	1955	18	lime, pink
1955	1967	12	lime
1967	1970	3	lime, grey
1970	1982	12	lime
1982	1986	4	lime, broken, sulphur water

T. D. Finished plugging June 8, 1950

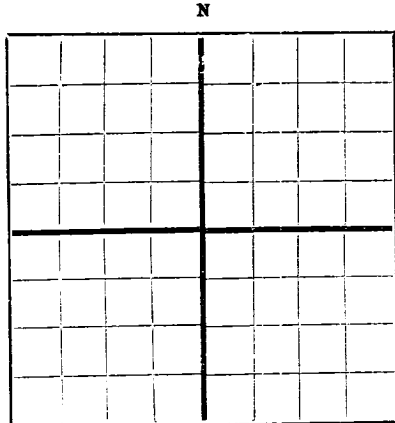

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Stanley L. Jones, Inc.

Box 164, Artesia, New Mexico

State Company or Operator 16 SE E 26 address 18S
 Well No. in of Sec. T
 Lease 27E N. M. P. M. Artesia Field, Eddy County
 Well is 1650 feet south of the North line and 330 feet west of the East line of S. c. 26, R 27E, T 18S
 B-11083
 If State land the oil and gas lease is No. Assignment No.
 If patented land the owner is. Address.
 If Government land the permittee is. Address.
 The Lessee is. Address.
 Drilling commenced April 27 19 50 Drilling was completed June 5 19 50
 Name of drilling contractor Brewer Drilling Co. Address Artesia, New Mexico
 Elevation above sea level at top of casing. feet.
 The information given is to be kept confidential until 19.

OIL SANDS OR ZONES

No. 1, from 1903 to 1912 No. 4, from to
 No. 2, from 1985 to 1950 No. 5, from to
 No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.
 No. 1, from 190 to 195 feet.
 No. 2, from 1982 to 1986 feet.
 No. 3, from to feet.
 No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	OUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
10"				229					
7				1778					

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHEEL SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
	7	1771	50			

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
 Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		DuPont	210 lbs	5-31-50	1885-1950	1970

Results of shooting or chemical treatment no increase in oil

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet
 Cable tools were used from 0 feet to 1986 feet, and from feet to feet

PRODUCTION

Put to producing, 19.
 The production of the first 24 hours was barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be.
 If gas well, cu. ft. per 24 hours. Gallons gasoline per 1,000 cu. ft. of gas.
 Rock pressure, lbs. per sq. in.

EMPLOYEES

Ray Bunkhart, Driller Carl Howell, Driller
 W. C. Cox, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 28th day of June, 19 50
 Notary Public
 Representing Stanley L. Jones, Inc.
 My Commission expires 2-19-52
 Address Box 164, Artesia, New Mexico

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	35	35	caliche
35	110	75	red bed
110	175	65	shale
175	185	10	gyp
185	235	50	red shale Water 190-195
235	365	130	anhydrite
365	385	20	red shale
385	430	45	anhydrite and red shale
430	438	8	anhydrite, broken
438	570	32	anhydrite
570	610	40	anhydrite, broken
610	775	165	anhydrite
775	800	25	lime and anhydrite
800	830	30	anhydrite and lime shells
830	855	25	anhydrite and broken lime
855	880	25	anhydrite and lime
880	945	65	anhydrite
945	955	10	lime and anhydrite
955	1054	99	anhydrite
1054	1065	11	anhydrite and red XXXX sand
1065	1085	20	anhydrite broken
1085	1200	205	anhydrite
1290	1305	15	anhydrite and red rock
1305	1315	10	red sand
1315	1460	145	anhydrite
1460	1470	10	lime, grey and anhydrite
1470	1480	10	lime, brown and sandy
1480	1515	35	anhydrite
1515	1545	30	anhydrite and brown sandy lime
1545	1563	18	anhydrite and grey sand
1563	1585	22	anhydrite
1585	1620	35	anhydrite and brown sandy lime
1620	1655	35	anhydrite and brown lime
1655	1661	6	lime, grey
1661	1680	19	lime, broken
1680	1695	15	XXXX anhydrite and sandy brown lime
1695	1705	10	lime, grey
1705	1720	15	sandy lime, broken
1720	1759	39	lime, grey
1759	1785	26	lime
1785	1797	12	lime, grey
1797	1823	26	lime
1823	1832	9	lime, white
1832	1858	26	lime
1858	1863	5	lime, grey
1863	1873	10	lime, grey and sandy
1873	1885	12	lime, grey
1885	1898	13	lime
1898	1912	14	lime, sandy 1903-12 oil show
1912	1926	14	lime, grey
1926	1937	11	lime
1937	1955	18	lime, pink
1955	1967	12	lime
1967	1970	3	lime, grey
1970	1982	12	lime
1982	1986	4	lime, broken, sulphur water

T. D. Finished plugging June 8, 1950