

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Oil Cons.
N.M. Div-Dist. 2
1301 W. Grand Avenue
Artesia, NM 88210

FORM APPROVED
Budget Bureau No. 1004-0135
Expires March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well
☒ Oil Well ☐ Gas Well ☐ Other _____

2. Name of Operator
DEVON ENERGY PRODUCTION COMPANY, LP.

3. Address and Telephone No.
20 NORTH BROADWAY, SUITE 1100, OKLAHOMA CITY, OKLAHOMA 73102 (405) 228-7512

4. Location of Well (Footage. Sec., T., R., M., or Survey Description)
1980' FNL, 660' FWL, Sec 17-T18S-R31E, Unit E

RECEIVED

APR 22 2004

OCB-ARTESIA

5. Lease Designation and Serial No.

LC-029393-B

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

W. Shugart 17 Fed #1

9. API Well No.

30-015-31505

10. Field and Pool, or Exploratory Area

Shugart Bone Spring North

11. County or Parish, State

Eddy County, NM

CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☒ Notice of Intent
- ☐ Subsequent Report
- ☐ Final Abandonment Notice

TYPE OF ACTION

- ☒ Abandonment
- ☐ Recompletion
- ☐ Plugging Back
- ☐ Casing Repair
- ☐ Altering Casing
- ☐ Other _____


- ☐ Change of Plans
- ☐ New Construction
- ☐ Non-Routine Fracturing
- ☐ Water Shut-Off
- ☐ Conversion to Injection
- ☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

1. POOH with 2-7/8" production string.
2. Set CIBP @ 3786'. Cap w/ 35' cement.
3. Displace hole w/ 9.5# mud to 2877'
- 150 4. Set 100' cement plug from 2777' to 2877'. WOC and tag.
5. Displace hole w/ 9.5# mud to 843'
- 150 6. Shoot squeeze holes at 843' and circulate 100' cement plug in 5-1/2" annulus.
7. Set 100' cement plug inside casing from 743' to 843'. WOC and tag.
8. Displace hole w/ 9.5# mud.
9. Set surface cement plug from 0' to 60'.
10. Cut off casings 3' below ground level.
11. Install dry hole marker.
12. Back fill pits and restore location.

APPROVAL SUBJECT TO
GENERAL REQUIREMENTS AND
SPECIAL STIPULATIONS ATTACHED

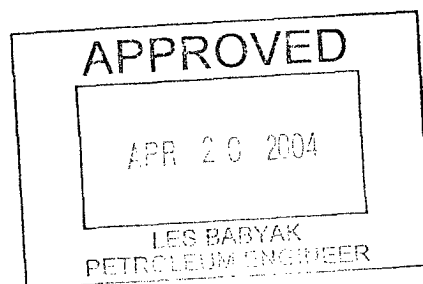

Note: Cement class "C" at 14.8 ppg with a yield of 1.32 cu. ft/sx

14. I hereby certify that the foregoing is true and correct

Signed

Ronnie Slack

Ronnie Slack

Title Engineering Technician

Date 4/15/04

This space for Federal or State office use)

Approved by

Title

Date

Conditions of approval, if any:

Accepted for record - NMOCID

DEVON ENERGY PRODUCTION COMPANY LP

Well Name: West Shugart 17 Federal #1		Field: Shugart Bone Spring North	
Location: 1980' FNL & 660' FWL Sec 17-18S-31E		County: Eddy	State: NM
Elevation: 3643' GR		Spud Date: 3/13/01	Compl Date: 4/20/01
API#: 30-015-31505	Prepared by: R Slack	Date: 2/18/04	Rev: 4/15/04

- ☒ CURRENT
☐ PROPOSED

17-1/2" hole
13-3/8", H40, 48# @ 793'
 Cmt'd w/ 650 sxs. Circ 100 sxs.

TOC @ 2350' on 5-1/2"
 (CBL 4/5/01)

11" Hole
8-5/8", J55, 32#, @ 2827'
 Cmt'd w/ 680 sxs. 90 sxs circ.

2-7/8", J55, Prod Tubing. No packer.

Grayburg (perfed 4/19/01)
 3,796' - 3,818'
 Acidized w/3500 gal 7.5%
 swabbed 1/2 bph @ 10% oil

Delaware (perfed 4/9/04)
 5278' - 5284' Wet
 5298' - 5306' Wet

Delaware (perfed 4/2/04)
 5400' - 5414' Frac'd & swabbed wet

Bone Spring (perfed 4/12/01)
 5,866' - 5,886'
 Acidized w/ 3000 gals, swab dirty/salty water

Bone Spring (perfed 4/5/01)
 7,712' - 7,740' 2 spf.
 Acidized w/ 4500 gals, swabbed dry

7-7/8" Hole
 5-1/2", 17#, N80, LTC @ 0' - 1525'
 5-1/2", 15.5#, J55, LTC @ 1525' - 7181'
 5-1/2", 17#, J55, LTC, @ 7181' - 8732'
 Cmt'd w/ 1200 sxs. TOC @ 2350'

35' Cmt on top
 CIBP @ 5268' (4/14/04)

35' Cmt on top
 CIBP @ 5390' (4/9/04)

35' Cmt on top
 CIBP @ 5830' (4/19/01)

35' Cmt on top
 CIBP @ 7680' (4/12/01)

PBTD @ 8684' (4/4/01)

TD @ 8,732'

DEVON ENERGY PRODUCTION COMPANY LP

Well Name: West Shugart 17 Federal #1		Field: Shugart Bone Spring North	
Location: 1980' FNL & 660' FWL Sec 17-18S-31E		County: Eddy	State: NM
Elevation: 3643' GR		Spud Date: 3/13/01	Compl Date: 4/20/01
API#: 30-015-31505	Prepared by: R Slack	Date: 4/15/04	Rev:

- ☐ CURRENT
- ☒ PROPOSED PLUG & ABANDONMENT

17-1/2" hole
13-3/8", H40, 48# @ 793'
 Cmt'd w/ 650 sxs. Circ 100 sxs.

TOC @ 2350' on 5-1/2"
 (CBL 4/5/01)

11" Hole
8-5/8", J55, 32# @ 2827'
 Cmt'd w/ 680 sxs. 90 sxs circ.

Grayburg (perf'd 4/19/01)
 3,796' - 3,818'
 Acidized w/3500 gal 7.5%
 swabbed 1/2 bph @ 10% oil

Delaware (perf'd 4/9/04)
 5278' - 5284' Wet
 5298' - 5306' Wet

Delaware (perf'd 4/2/04)
 5400' - 5414' Frac'd & swabbed wet

Bone Spring (perf'd 4/12/01)
 5,866' - 5,886'
 Acidized w/ 3000 gals, swab dirty/salty water

Bone Spring (perf'd 4/5/01)
 7,712' - 7,740' 2 spf.
 Acidized w/ 4500 gals, swabbed dry

7-7/8" Hole
 5-1/2", 17#, N80, LTC @ 0' - 1525'
 5-1/2", 15.5#, J55, LTC @ 1525' - 7181'
 5-1/2", 17#, J55, LTC, @ 7181' - 8732'
 Cmt'd w/ 1200 sxs. TOC @ 2350'

9.5# Mud

9.5# Mud

9.5# Mud

Proposed

1. Set 60' surface plug.
2. Cut casings off, 3' below ground level
3. Install dry hole marker

Proposed

1. Shoot sqz holes at 843' & circulate 100' cement in 5-1/2" annulus.
2. Set 100' plug inside casing from 743' to 843'
3. WOC Tag plug

Proposed

Set 100' Cement Plug from 2777' to 2877'
 WOC & Tag plug

Proposed

35' Cmt on top
 CIBP @ 3786'

35' Cmt on top
 CIBP @ 5268' (4/14/04)

35' Cmt on top
 CIBP @ 5390' (4/9/04)

35' Cmt on top
 CIBP @ 5830' (4/19/01)

35' Cmt on top
 CIBP @ 7680' (4/12/01)

PBTD @ 8684' (4/4/01)

TD @ 8,732'