

Submit 3 Copies To Appropriate District  
Office  
District I  
1625 N. French Dr., Hobbs, NM 88240  
District II  
1301 W. Grand Ave., Artesia, NM 88210  
District III  
1000 Rio Brazos Rd., Aztec, NM 87410  
District IV  
1220 S. St. Francis Dr., Santa Fe, NM  
87505

State of New Mexico  
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

Form C-103  
Revised March 25, 1999

<b>SUNDRY NOTICES AND REPORTS ON WELLS</b> (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-015-20385
1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/>		5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
2. Name of Operator Happy Oil Co.		6. State Oil & Gas Lease No.
3. Address of Operator 811 Bullock Ave, Artesia NM 88210		7. Lease Name or Unit Agreement Name:  Fair
4. Well Location  Unit Letter <u>D</u> : <u>330</u> feet from the <u>N</u> line and <u>330</u> feet from the <u>W</u> line  Section <u>24</u> Township <u>18S</u> Range <u>26E</u> NMPM County <u>Eddy</u>		8. Well No. 1
10.. Elevation ( <i>Show whether DR, RKB, RT, GR, etc.</i> ) 3307 GR		9. Pool name or Wildcat Atoka S A

11. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒  
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐  
PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐  
OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐  
COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐  
CASING TEST AND CEMENT JOB ☐  
OTHER: ☐

12. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompilation.

Will set Plugs as follows;

25 SX @ 1650 & Tag. Fill W/fresh water gel mud.  
100 Sx @ 1143 to 1043 & Tag.  
Circulate Cement from 60'.

Land is on an active farm. Marker will need to be offset.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE *Dalton Bell* TITLE Agent DATE 3/12/02

Type or print name Dalton Bell

Telephone No. 505-748-2134


APPROVED BY *Phil Hargis* TITLE Field Supervisor DATE 3/19/02  
Conditions of approval, if any:

Operator Happy Oil Co.  
Well Fair #1  
Unit D Section 24 Township 18S Range 26E  
API # 30-015-20385

TOPS

ates \_\_\_\_\_  
T. Salt \_\_\_\_\_  
B. Salt \_\_\_\_\_  
Glorieta \_\_\_\_\_  
Bone Sp. \_\_\_\_\_  
Abo \_\_\_\_\_  
Wolfcamp \_\_\_\_\_  
Morrow \_\_\_\_\_  
Devonian \_\_\_\_\_  
Fusselman \_\_\_\_\_  
Other \_\_\_\_\_

- Contact OCD 24 hrs. prior to any work done
- Salt gel mud consisting of 10# brine with 1 lb of gel per barrel must be placed between each plug
- Install dry hole marker as per rule 202.B.2
- Plugs are to be set from point indicated up to point of cement. Plugs must not be less than 100' or 25 Sacs of cement, whichever is greater.
- Shoe and stub plugs will be 50' above and below shoe or stub and tagged.
- Surface plug will be from 0' - 60'
- Where plugs are required cement must be placed inside and outside of all casing string(s), in the correct footage or sacks required, if no cement exists.
- Plugs to be tagged will be indicated.

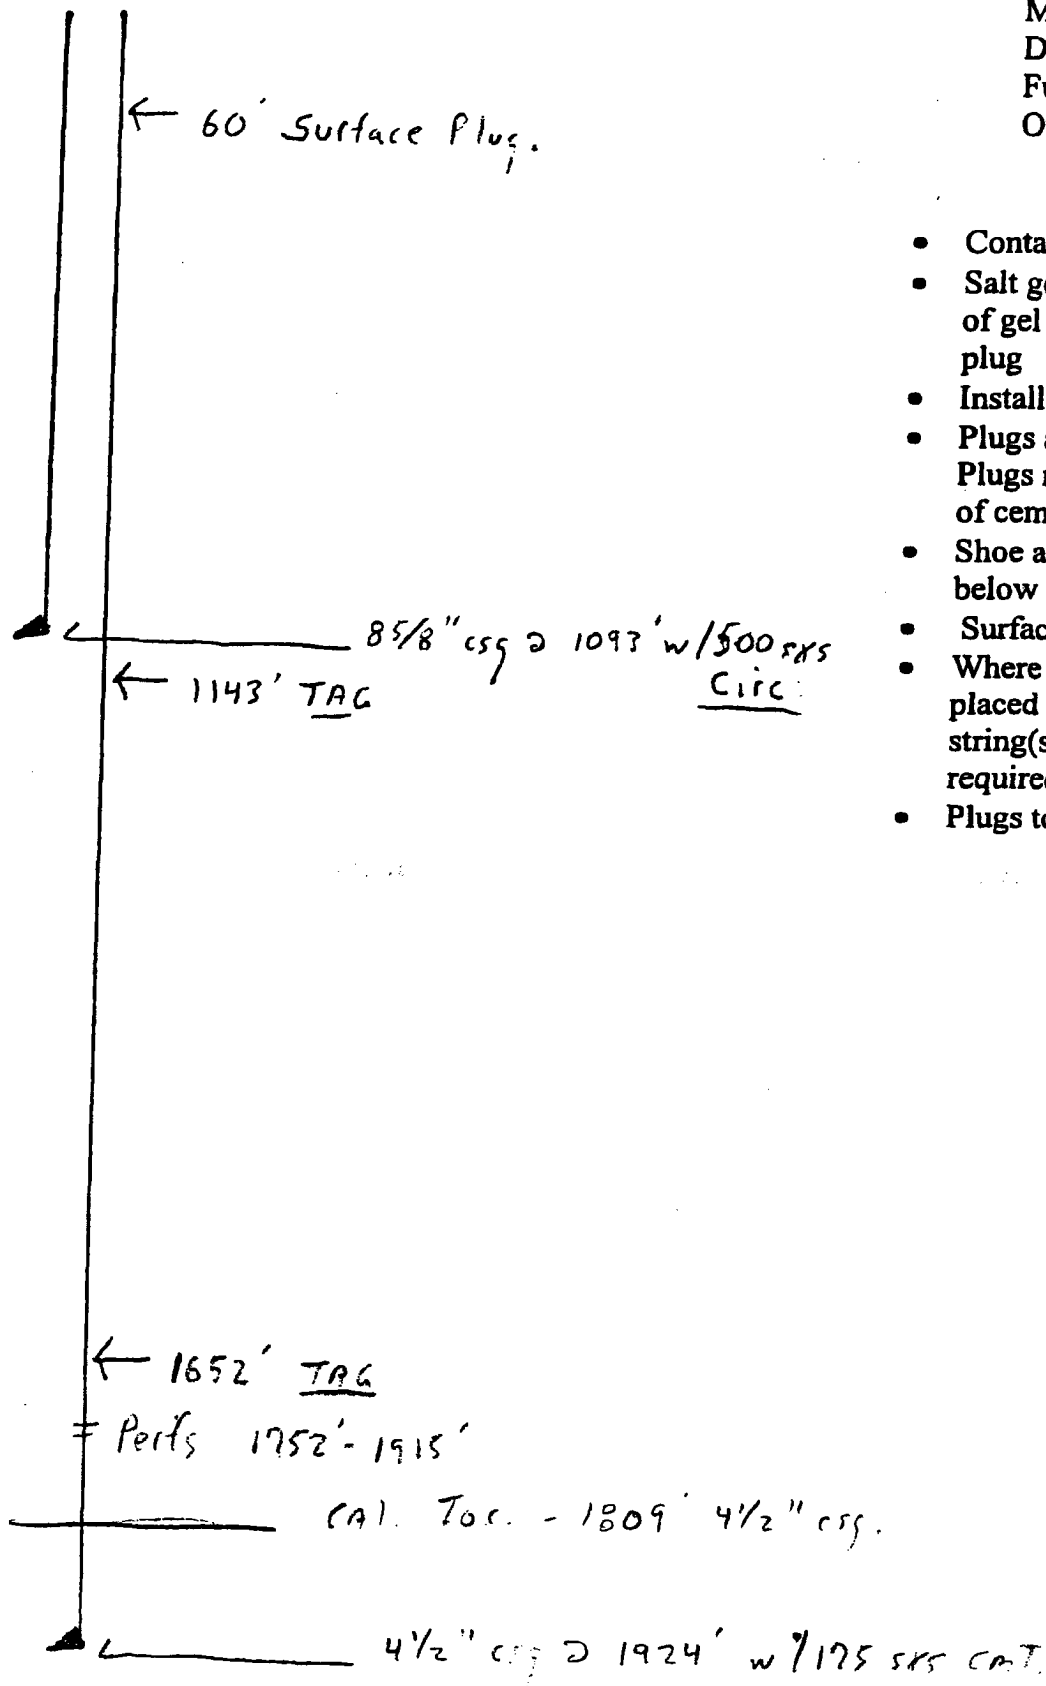

MS