

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720

District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico

Form C-101
Revised December 16, 2011


Energy Minerals and Natural Resources

Oil Conservation Division

1220 South St. Francis Dr.

Santa Fe, NM 87505

Amended



Permit

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE

Operator Name and Address Yates Petroleum Corporation 105 South Fourth Street Artesia, NM 88210		OGRID Number 025575
		API Number 30-015-27047
Property Code 20909	Property Name Julie	Well No. 2

Surface Location

UL - Lot	Section	Township	Range	Lot Idn	Feet from	N/S Line	Feet From	E/W Line	County
B	17	19S	25E		660	North	1980	East	Eddy

Pool Information

N. Seven Rivers; Glorieta-Yeso	97565
--------------------------------	-------

Additional Well Information

Work Type P	Well Type O	Cable/Rotary N/A	Lease Type Fee	Ground Level Elevation 3538'GL
Multiple N	Proposed Depth N/A	Formation Cisco	Contractor N/A	Spud Date N/A
Depth to Ground water.		Distance from nearest fresh water well		Distance to nearest surface water

Proposed Casing and Cement Program

Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
REFER TO ORIGINAL COMPLETION						

Casing/Cement Program: Additional Comments

Yates Petroleum Corporation plans to plugback and recomplete this well as follows: NU BOP. Rig up all safety equipment as needed. Run a GRJB to 7695'. Set a CIBP at 7690' with 35' cement on top. This will place a plug over open Canyon perforations. TIH open cided to 5585'. Load hole with plugging mud then spot a 35 sx Class "C" cement plug from 5375'-5558'. This will leave a plug across Wolfcamp top and open stage tool. WOC and tag; reset if necessary. Move tubing to 3810'. Load hole with plugging mud then spot a 25 sx Class "C" cement plug from 3670'-3810'. This will leave a plug across Bone Spring top. WOC and test casing to 3400 psi. Perforate Yeso 2348'-2620' (59). Frac as attached. Flow well back and allow well to clean up. TIH with tubing to check for fill and to ensure that perforations are not covered. POOH. TIH with tubing, swab well until it cleans up then TIH with pumping equipment and turn well over to production. Wellbore schematics attached. Well name will change to Julie ~~San~~ #2 when recompleted.

Proposed Blowout Prevention Program

Type	Working Pressure	Test Pressure	Manufacturer
Manual BOP	3000-psi	3000 psi	Whichever company is available

I hereby certify that the information given above is true and complete to the best of my knowledge and belief.

I further certify that the drilling pit will be constructed according to NMOC D guidelines , a general permit , or an (attached) alternative OGD-approved plan . YPC uses steel tanks only.

Signature: *Tina Huerta*

Printed name: Tina Huerta

Title: Regulatory Reporting Supervisor

E-mail Address: tinah@yatespetroleum.com

Date: May 14, 2013

Phone: 575-748-4168

OIL CONSERVATION DIVISION

Approved By: *LR Dade*

Title: *DIST. REP. SUPERVISOR*

Approved Date: *5/14/2013* Expiration Date: *5/14/2015*


Conditions of Approval Attached: *Subsequent to w/o provide amended C102 with well name change*

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico

Form C-101
Revised December 16, 2011

Energy Minerals and Natural Resources
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505



Permit

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE

¹ Operator Name and Address Yates Petroleum Corporation 105 South Fourth Street Artesia, NM 88210		² OGRID Number 025575
		³ API Number 30-015-27047
⁴ Property Code 34689	⁵ Property Name NDDUP Unit	⁶ Well No. 6

⁷ Surface Location

UL - Lot B	Section 17	Township 19S	Range 25E	Lot Idn	Feet from 660	N/S Line North	Feet From 1980	E/W Line East	County Eddy
---------------	---------------	-----------------	--------------	---------	------------------	-------------------	-------------------	------------------	----------------

⁸ Pool Information

N. Seven Rivers; Glorieta-Yeso	97565
--------------------------------	-------

Additional Well Information

⁹ Work Type P	¹⁰ Well Type O	¹¹ Cable/Rotary N/A	¹² Lease Type Fee	¹³ Ground Level Elevation 3538'GL
¹⁴ Multiple N	¹⁵ Proposed Depth N/A	¹⁶ Formation Cisco	¹⁷ Contractor N/A	¹⁸ Spud Date N/A
Depth to Ground water		Distance from nearest fresh water well		Distance to nearest surface water

¹⁹ Proposed Casing and Cement Program

Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
REFER TO ORIGINAL COMPLETION						

Casing/Cement Program: Additional Comments

Yates Petroleum Corporation plans to plugback and recomple this well as follows: NU BOP. Rig up all safety equipment as needed. Run a GR/JB to 7695'. Set a CIBP at 7690' with 35' cement on top. This will place a plug over open Canyon perforations. TIH open ended to 5585'. Load hole with plugging mud then spot a 35 sx Class "C" cement plug from 5375'-5558'. This will leave a plug across Wolfcamp top and open stage tool. WOC and tag; reset if necessary. Move tubing to 3810'. Load hole with plugging mud then spot a 25 sx Class "C" cement plug from 3670'-3810'. This will leave a plug across Bone Spring top. WOC and test casing to 3400 psi. Perforate Yeso 2348'-2620' (59). Frac as attached. Flow well back and allow well to clean up. TIH with tubing to check for fill and to ensure that perforations are not covered. POOH. TIH with tubing, swab well until it cleans up then TIH with pumping equipment and turn well over to production. Wellbore schematics attached. Well name will change to Julie Com #2 when recompleted.

Proposed Blowout Prevention Program

Type	Working Pressure	Test Pressure	Manufacturer
Manual BOP	3000 psi	3000 psi	Whichever company is available

I hereby certify that the information given above is true and complete to the best of my knowledge and belief.

I further certify that the drilling pit will be constructed according to NMOCD guidelines , a general permit , or an (attached) alternative OCD-approved plan . **YPC uses steel tanks only.**

Signature: *Tina Huerta*

Printed name: Tina Huerta

Title: Regulatory Reporting Supervisor

E-mail Address: tinah@yatespetroleum.com

Date: February 26, 2013

Phone: 575-748-4168

OIL CONSERVATION DIVISION

Approved By:

T. C. Shepard

Title:

Geophysicist

Approved Date:

3/1/2013

Expiration Date:

3/2/2015

Conditions of Approval Attached

Treating Schedule

Sta. #	Fluid	Stg. Type	Cln. Vol. (gals)	Rate (bpm)	Proppant	Conc. (lb/gal)	Stage Prop. (lbs)	Cum. Prop. (lbs)
1	Slick Water	Prepad	100	20		0.0	0	0
2	15% HCL	Acid	2,000	30		0.0	0	0
3	Slick Water	Prepad	2,000	75		0.0	0	0
4	Slick Water	Pad	56,000	75		0.0	0	0
5	Slick Water	Slurry	4,500	75	100 Mesh	0.2	900	900
6	Slick Water	Sweep	4,500	75		0.0	0	900
7	Slick Water	Slurry	4,500	75	100 Mesh	0.3	1,350	2,250
8	Slick Water	Sweep	4,500	75		0.0	0	2,250
9	Slick Water	Slurry	4,500	75	100 Mesh	0.4	1,800	4,050
10	Slick Water	Sweep	4,500	75		0.0	0	4,050
11	Slick Water	Slurry	4,500	75	100 Mesh	0.5	2,250	6,300
12	Slick Water	Sweep	4,500	75		0.0	0	6,300
13	Slick Water	Slurry	4,500	75	100 Mesh	0.6	2,700	9,000
14	Slick Water	Sweep	4,500	75		0.0	0	9,000
15	Slick Water	Slurry	4,500	75	100 Mesh	0.7	3,150	12,150
16	Slick Water	Sweep	4,500	75		0.0	0	12,150
17	Slick Water	Slurry	4,500	75	100 Mesh	0.8	3,600	15,750
18	Slick Water	Sweep	4,500	75		0.0	0	15,750
19	Slick Water	Slurry	4,500	75	100 Mesh	0.9	4,050	19,800
20	Slick Water	Sweep	4,500	75		0.0	0	19,800
21	Slick Water	Slurry	4,500	75	100 Mesh	1.0	4,500	24,300
22	Slick Water	Pad	10,700	75		0.0	0	24,300
23	Slick Water	Slurry	20,000	75	40/70 Brady	0.2	4,000	28,300
24	Slick Water	Sweep	6,000	75		0.0	0	28,300
25	Slick Water	Slurry	20,000	75	40/70 Brady	0.3	6,000	34,300
26	Slick Water	Sweep	6,000	75		0.0	0	34,300
27	Slick Water	Slurry	20,000	75	40/70 Brady	0.4	8,000	42,300
28	Slick Water	Sweep	6,000	75		0.0	0	42,300
29	Slick Water	Slurry	20,000	75	40/70 Brady	0.5	10,000	52,300
30	Slick Water	Sweep	6,000	75		0.0	0	52,300
31	Slick Water	Slurry	20,000	75	40/70 Brady	0.6	12,000	64,300
32	Slick Water	Sweep	6,000	75		0.0	0	64,300
33	Slick Water	Slurry	20,000	75	40/70 Brady	0.7	14,000	78,300
34	Slick Water	Sweep	6,000	75		0.0	0	78,300

35	Slick Water	Slurry	20,000	75	40/70 Brady	0.8	16,000	94,300
36	Slick Water	Sweep	6,000	75		0.0	0	94,300
37	Slick Water	Slurry	23,000	75	40/70 Brady	0.9	20,700	115,000
38	Slick Water	Sweep	6,000	75		0.0	0	115,000
39	Slick Water	Slurry	24,000	75	40/70 Brady	1.0	24,000	139,000
40	Slick Water	Pad	17,000	75		0.0	0	139,000
41	Slick Water	Slurry	17,000	75	16/30 Brady	1.0	17,000	156,000
42	Slick Water	Slurry	24,000	75	16/30 Brady	2.0	48,000	204,000
43	Slick Water	Slurry	32,000	75	16/30 Brady	3.0	96,000	300,000
44	Slick Water	Flush	2,388	75		0.0	0	300,000
45	15% HCL	Acid	1,000	75		0.0	0	300,000
46	Slick Water	Flush	3,900	75		0.0	0	300,000
	Totals		479,588				300,000	

Estimated Surface Treating Pressure = 2,385 psig.

Maximum Surface Treating Pressure = 3,400 psig.

Fluid Specifications:

Slick Water - fresh water with 1.0 gal/M liquid friction reducer, 1 gal/M gas Surfactant, liquid biocide agent and an oxidizing breaker.


YPC will provide:

25 clean frac tanks with 480 barrels of Fresh water in each tank for treatment and flush.


Service company to provide: computer van with job reports, weight tickets, on location and QC lab van.

Yates Petroleum Corporation

Typical 3,000 psi Pressure System Schematic

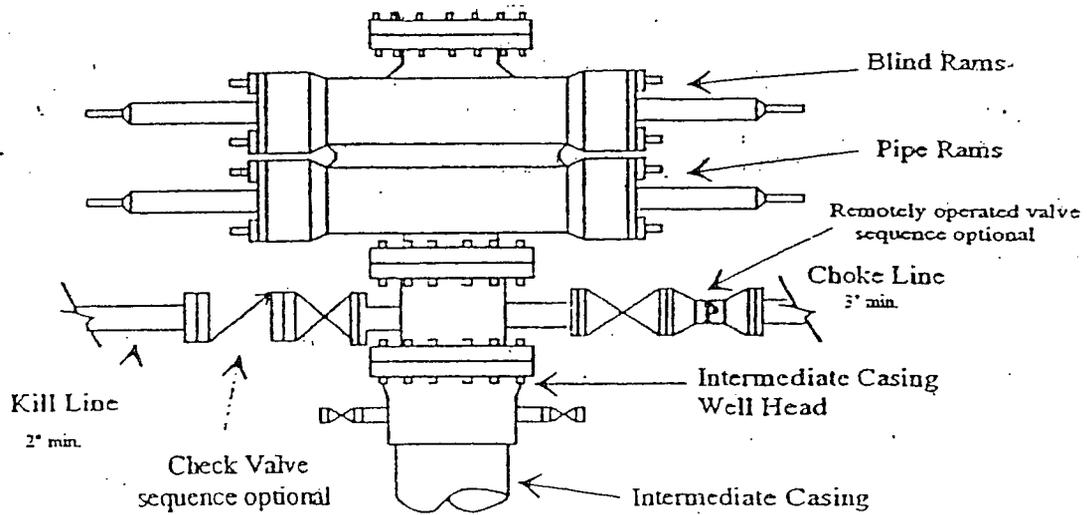

Typical 3,000 psi choke manifold assembly with at least these minimum features

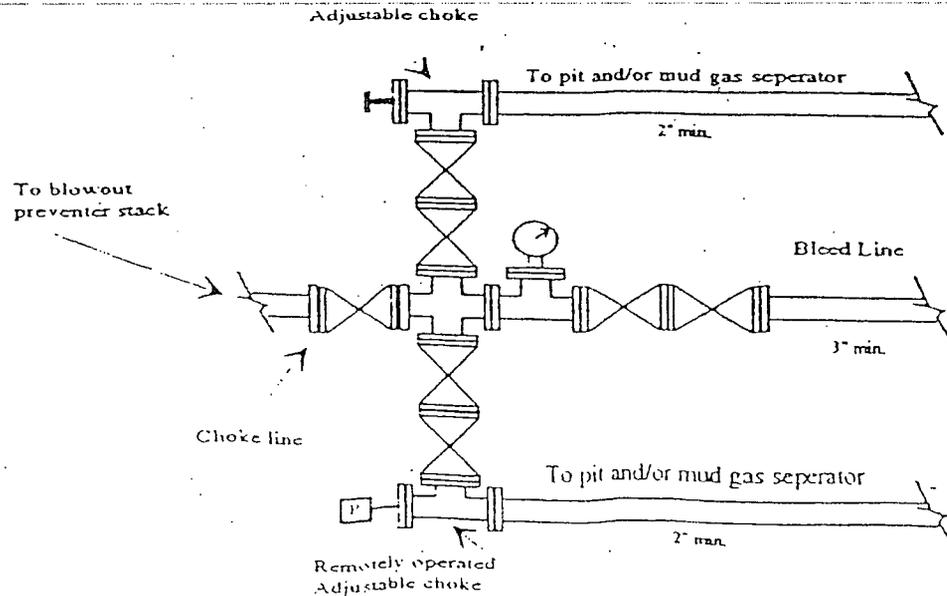

WELL NAME: NDDUP Unit #6 FIELD: Dagger Draw

LOCATION: 660' FNL & 1,980' FEL of Section 17-19S-25E Eddy Co., NM

GL: 3,538' ZERO: KB:

SPUD DATE: 7/16/92 COMPLETION DATE: 12/19/92


COMMENTS: API No.: 30-015-27047
(Formerly Julie Com #2)

CASING PROGRAM

9-5/8" 36# J-55	1,232'
7" 23#/26# J-55	8,000'

Before


14-3/4" Hole

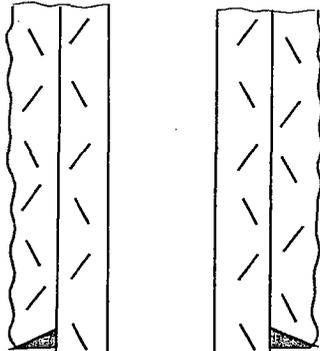

9-5/8" @ 1,232' w/ 1,260 sx (Circ)

TOPS	
SA	638'
Glorieta	2,085'
Tubb	2,657'
Abo	3,760'
WC	5,485'
Penn	7,255'
Canyon	7,650'

8-3/4" Hole

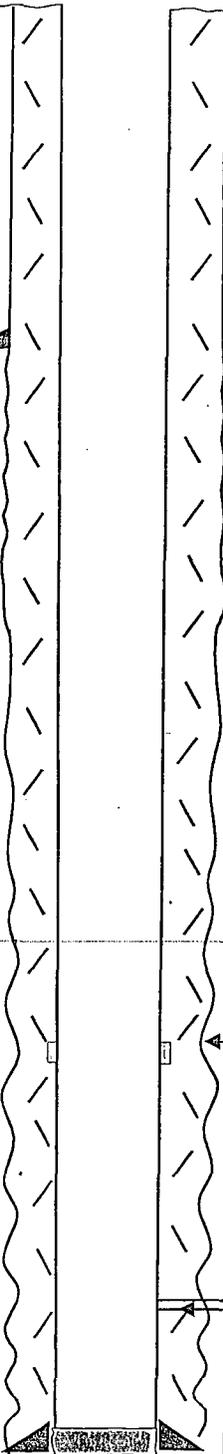

DV tool @ 5,508'

Cisco Perfs: 7,740-7,812

TD: 8,000'

7" @ 8,000' w/ 1,550 sx
1st Stage: 700 sx (Circ)
2nd Stage: 750 sx (Circ)

Not to Scale
10/7/10
DC/Hill

WELL NAME: NDDUP Unit #6 FIELD: Dagger Draw

LOCATION: 660' FNL & 1,980' FEL of Section 17-19S-25E Eddy Co., NM

GL: 3,538' ZERO: _____ KB: _____


SPUD DATE: 7/16/92 COMPLETION DATE: 12/19/92

COMMENTS: API No.: 30-015-27047
(Formerly Julie Com #2)

CASING PROGRAM

9-5/8" 36# J-55	1,232'
7" 23#/26# J-55	8,000'

After

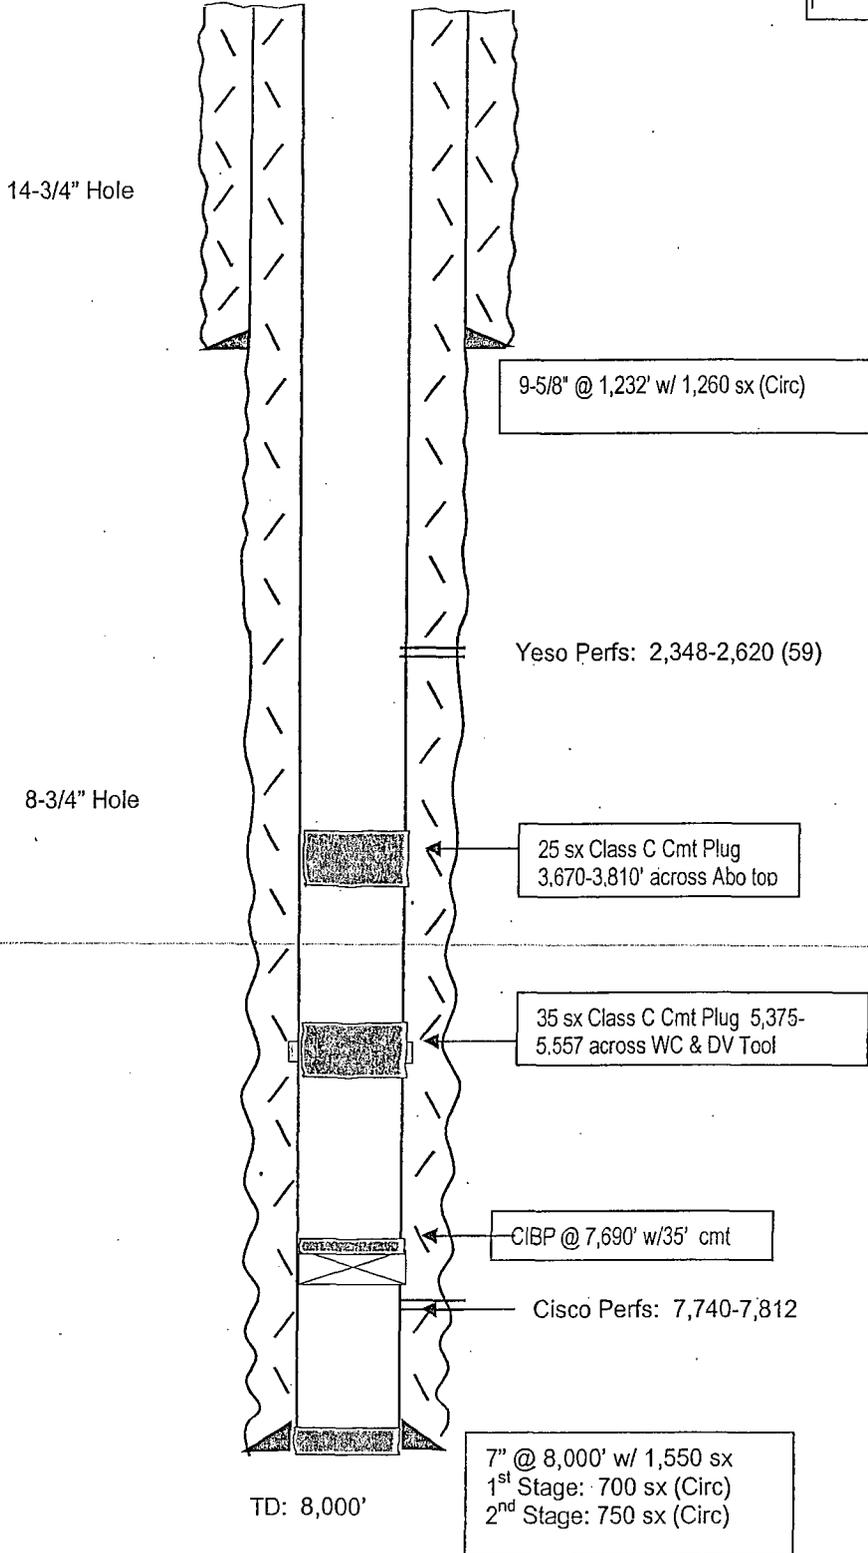

TOPS

SA	638'
Glorieta	2,085'
Tubb	2,657'
Abo	3,760'
WC	5,485'
Penn	7,255'
Canyon	7,650'

Not to Scale
10/7/10
DC/Hill

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-6170
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico

Form C-102

RECEIVED
FEB 28 2013
GOOD ARTESIA

Energy Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Revised August 1, 2011
Submit one copy to appropriate
District Office

AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-015-27047		² Pool Code 97565		³ Pool Name N. Seven Rivers; Glorieta-Yeso	
⁴ Property Code 34689		⁵ Property Name NDDUP Unit			⁶ Well Number 6
⁷ OGRID No. 025575		⁸ Operator Name Yates Petroleum Corporation			⁹ Elevation 3538'GL

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
B	17	19S	25E		660	North	1980	East	Eddy

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County

¹² Dedicated Acres 40	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.
-------------------------------------	-------------------------------	----------------------------------	-------------------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

¹⁶ 	<p>¹⁷ OPERATOR CERTIFICATION <i>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.</i></p> <p><i>Tina Huerta</i> February 26, 2013 Signature Date</p> <p>Tina Huerta Printed Name</p> <p>tinah@yatespetroleum.com E-mail Address</p>