

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

OCD Artesia

FORM APPROVED
OMB No. 1004-0137
Expires: July 31, 2010

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter and Abandoned well. Use Form 3160-3 (APD) for such proposals

5. Lease Serial No.
NMLC-029426B

6. If Indian, Allottee or Tribe Name

SUBMIT IN TRIPLICATE - Other instructions on page 2.

7. If Unit of CA/Agreement, Name and/or No.

1. Type of Well
 Oil Well Gas Well Other

8. Well Name and No.
CROW FEDERAL #10H <308711>

2. Name of Operator
APACHE CORPORATION <873>

9. API Well No.
30-015-40574

3. Address
**303 VETERANS AIRPARK LN, #3000
MIDLAND, TX 79705**

3b. Phone No. (include area Code)
432-818-1117 / 432-818-1198

10. Field and Pool or Exploratory Area
CEDAR LAKE; GLORIETA-YESO <96831>

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
UL: M, SEC 10, T17S, R31E, 883' FSL & 250' FWL

11. County or Parish, State
EDDY COUNTY, NM

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	<u>DRILLING OPS:</u>
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	<u>CASING & CEMENT</u>
				<u>REPORT</u>

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directional or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attached the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.


Bond No: **BLM-CO-1463** **4/17/2013 - SPUD**

4/17/2013 - 13.375" Surface; 17.5" hole, 48#, H-40 csg set @ 575'

Lead: 655 sx Class Class C (14.8 wt, 1.34 yld)

Compressive Strengths : **12 hr - 589 psi 24 hr - 947 psi** Circ 268 sx to surf

Surf Csg Pressure Test: 1100 psi/30 min - OK

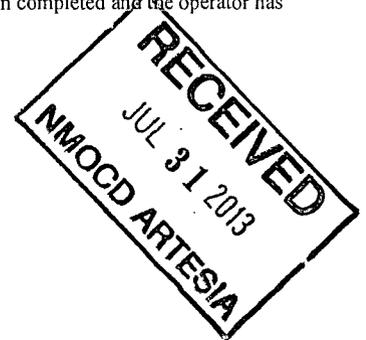

Accepted for record
Adade NMOCD 8/1/2013

REPORT CONTINUED ON PAGE 2.

14. I hereby certify that the foregoing is true and correct.
Name (Printed/Typed)
VICKI BROWN

Title **DRILLING TECH**

Signature *Vicki Brown*

Date **7/12/2013**

ACCEPTED FOR RECORD

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by
Title
Office

Date **JUL 27 2013**
[Signature]
BUREAU OF LAND MANAGEMENT
CARLSBAD FIELD OFFICE

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

CROW FEDERAL #10 - Csg & Cmt End of Well Sundry

4/22/2013 - 9.625" Intermediate, 12.25" Hole, 36#, J-55 csg set @ 3500'

Lead: 1300 sx Class C 35/65 POZ (12.9 wt, 2.07yld)

Compressive Strengths: 12 hr - 540 psi 24 hr - 866 psi

Tail: 550 sx Class C w/1% CaCL + 0.25% De-foamer (14.8 wt, 1.34 yld)

Compressive Strengths: 12 hr - 813 psi 24 hr - 1205 psi

Intermediate Csg Pressure Test: 1500psi/30 min - OK

Circ 444 sx to surf

2nd Inter ?

5/6/2013 - DRL F/8990' - T/9765' TD. Wash/Ream through curve and lateral. Fishing, service rig.

5/18/2013 - 4.5" Production Liner; 6.125" Hole, #13.50, L-80 set @ 9638' MD

Lead: 270 sx PVL (13.0 wt, 1.48 yld)

Circ 0 sx

Set Packer

Production Csg Pressure Test: 2500 psi/30 min - OK

Top liner ?

5/20/2013 - RR