

Submit 1 Copy To Appropriate District Office  
District I - (575) 393-6161  
1625 N. French Dr., Hobbs, NM 88240  
District II - (575) 748-1283  
811 S. First St., Artesia, NM 88210  
District III - (505) 334-6178  
1000 Rio Brazos Rd., Aztec, NM 87410  
District IV - (505) 476-3460  
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico  
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

Form C-103  
Revised July 18, 2013

<b>SUNDRY NOTICES AND REPORTS ON WELLS</b> (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-15-32466
1. Type of Well: Oil Well <input type="checkbox"/> Gas Well <input checked="" type="checkbox"/> Other		5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
2. Name of Operator OXY USA Inc.		6. State Oil & Gas Lease No. V-492
3. Address of Operator P.O. Box 50250 Midland, TX 79710		7. Lease Name or Unit Agreement Name State V-492
4. Well Location Unit Letter <u>C</u> : <u>800</u> feet from the <u>north</u> line and <u>2300</u> feet from the <u>west</u> line Section <u>27</u> Township <u>24S</u> Range <u>25E</u> NMPM County <u>Eddy</u>		8. Well Number 2
11. Elevation (Show whether DR, RKB, RT, GR, etc.) <u>2986'</u>		9. OGRID Number 16696
		10. Pool name or Wildcat Salt Draw Atoka

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:	SUBSEQUENT REPORT OF:
PERFORM REMEDIAL WORK <input type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>
TEMPORARILY ABANDON <input checked="" type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>
DOWNHOLE COMMINGLE <input type="checkbox"/>	P AND A <input type="checkbox"/>
CLOSED-LOOP SYSTEM <input type="checkbox"/>	CASING/CEMENT JOB <input type="checkbox"/>
OTHER: <u>MIT</u> <input checked="" type="checkbox"/>	OTHER: <input type="checkbox"/>

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

TD-12990' PBD-12941' Perfs-11832-11930'


OXY USA Inc. respectfully requests to temporarily abandon this well. It is currently being evaluated for possible future recompletion.

1. RIH & set CIBP @ +/-11782'
2. Notify NMOCD of casing integrity test 24hrs in advance.
3. RU pump truck, circulate well with treated water, pressure test casing to 500# for 30 min.

Spud D: TA status may be granted after a successful MIT test is performed.  
Contact the OCD to schedule the test so it may be witnessed.

Rig Release Date:

CASE PROD 12/1/12



I hereby certify that the information above is true and complete to the best of my knowledge and belief.


SIGNATURE David Stewart TITLE Sr. Regulatory Advisor DATE 3/6/14

Type or print name David Stewart E-mail address: david\_stewart@oxy.com PHONE: 432-685-5717

For State Use Only

APPROVED BY: Richard Inae TITLE Compliance Officer DATE 3/6/14  
Conditions of Approval (if any):

OXY USA Inc. - Proposed  
State V-492 #2  
API No. 30-015-32466

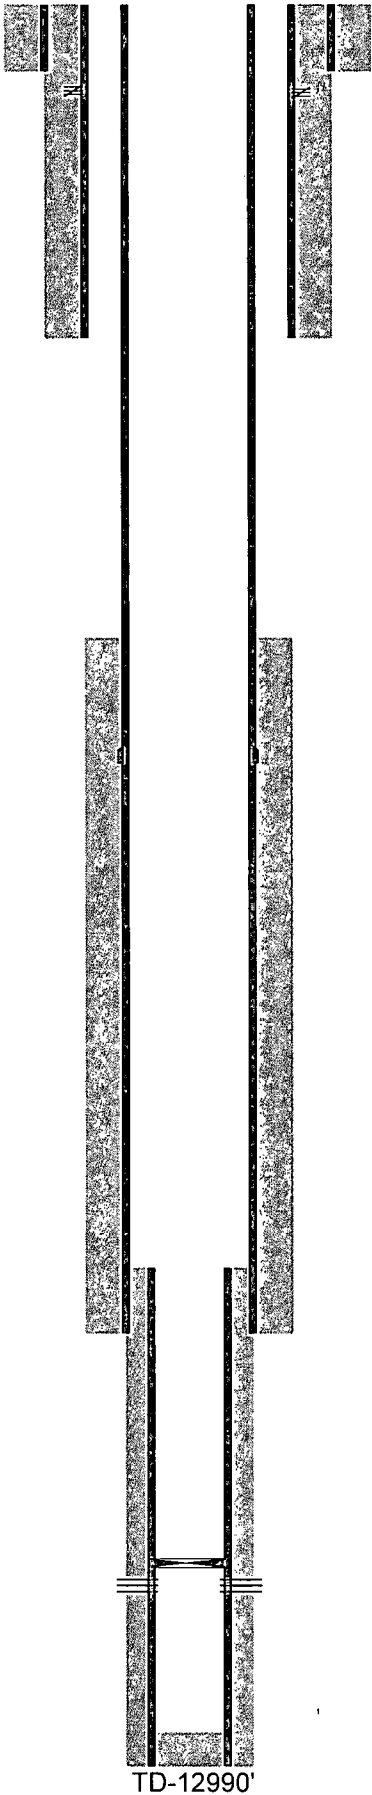

Perf @ 600'

17-1/2" hole @ 600'  
13-3/8" csg @ 600'  
w/ 771sx-TOC-Surf-Circ

12-1/4" hole @ 2560'  
9-5/8" csg @ 2560'  
w/ 1060sx-TOC-Surf-Circ

8-1/2" hole @ 9800'  
7" csg @ 9800'  
DV T@ 5826'  
w/ 1090sx-TOC-5056'-Calc

Perfs @ 11832-11930'

6-1/8" hole @ 12990'  
5" liner @ 9529-12989'  
w/ 430sx-TOC-9529'-Circ

CIBP @ 11782'

PB-12941'


TD-12990'

OXY USA Inc. - Current  
State V-492 #2  
API No. 30-015-32466



17-1/2" hole @ 600'  
13-3/8" csg @ 600'  
w/ 771sx-TOC-Surf-Circ  
Perf @ 600'


12-1/4" hole @ 2560'  
9-5/8" csg @ 2560'  
w/ 1060sx-TOC-Surf-Circ

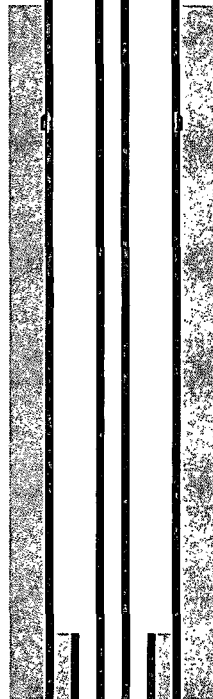

8-1/2" hole @ 9800'  
7" csg @ 9800'  
DV T@ 5826'  
w/ 1090sx-TOC-5056'-Calc

2-3/8" tbg & pkr @ 11723'

Perfs @ 11832-11930'



6-1/8" hole @ 12990'  
5" liner @ 9529-12989'  
w/ 430sx-TOC-9529'-Circ

PB-12941'

TD-12990'