

CA ABD

Entered

Form 3160-5
(August 2007)

OCD Artesia

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0135
Expires: July 31, 2010

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

5. Lease Serial No.
NMNM0354232

6. If Indian, Allottee or Tribe Name

SUBMIT IN TRIPLICATE - Other instructions on reverse side.

7. If Unit or CA/Agreement, Name and/or No.
NM 87894

8. Well Name and No.
ELIZANDO A FEDERAL 2Y

1. Type of Well
 Oil Well Gas Well Other

9. API Well No.
30-015-21337

2. Name of Operator
OXY USA WTP LP
Contact: DAVID STEWART
E-Mail: david_stewart@oxy.com

3a. Address
P.O. BOX 50250
MIDLAND, TX 79710

3b. Phone No. (include area code)
Ph: 432-685-5717
Fx: 432-685-5742

10. Field and Pool, or Exploratory
LA HUERTA STRAWN/ATOKA

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
Sec 21 T21S R27E NESW 1880FSL 1780FWL
32.463370 N Lat, 104.197760 W Lon

11. County or Parish, and State
EDDY COUNTY, NM

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input checked="" type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

12/30/13-1/27/14 - (Complete daily reports available on request)
MIRU, NDWH, NU BOP, RIH & tag solid @ 1865', shows bad casing damage. RU csg tools, POOH w/ 42jts (1824") 5-1/2" csg. RIH & tag up @ 1823', tag solid @ 1862', begin to fish tbg & csg, got down to 1886'.

RECLAMATION
DUE 1-4-15

2/3-3/28/14 - (Complete daily reports available on request)
RU csg tools, RIH w/ 7" csg, tag fill @ 1853', wash down to 1863'. Change out wellhead and BOP, RIH & tag @ 1863', clean out to 1885', continue to fish tbg & csg. Pulled and re-ran 7" csg several times while trying to fish. Got down to 1911' (inside 5-1/2" csg) lost circulation.

Accepted as to plugging of the well bore.
Liability under bond is retained until
Surface restoration is completed.

3/29-4/23/14 - (Complete daily reports available on request)
Start pumping LCM to attempt to regain circulation, weld on 29' 7" csg wash down to 1898', top of

14. I hereby certify that the foregoing is true and correct.

Electronic Submission #252298 verified by the BLM Well Information System
For OXY USA WTP LP sent to the Carlsbad
Committed to AFMSS for processing by JAMES AMOS on 08/12/2014 ()

Accepted for record
420 NMDCD9-2-14

Name (Printed/Typed) DAVID STEWART

Title SR. REGULATORY ADVISOR

Signature (Electronic Submission)

Date 07/09/2014

THIS SPACE FOR FEDERAL OR STATE OFFICE USE FOR RECORD

Approved By

Title Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office AUG 10 2014

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED **

Additional data for EC transaction #252298 that would not fit on the form

32. Additional remarks, continued

csg @ 1882', got circulation back, continue to fish, got down to 1960'.

4/24-5/28/14 - (Complete daily reports available on request)

NDWH, NU BOP, POOH w/ 7" csg, RIH, mill, cut & fish on 5-1/2" csg, & cmt to 1918'. RIH w/ 7" csg and wash down to 1918'. Continue to mill. Fish and clean out, got down to 2013', POOH w/ tbg & bit.

5/28-6/23/14 - (Complete daily reports available on request)

Change out BOP rams, RIH w/ 5-1/2" csg, tag top of csg stub @ 1916'. Continue to mill, fish and clean out to 3047', circ, POOH.

6/24/2014 Standby waiting on orders from the BLM on plugging.

6/25/2014 Rec approved amended plugging procedure form Wesley Ingram and Jim Amos-BLM. RIH w/ tbg to 2650'.

STEP 1 - 100sx CLASS C NEAT AT 3047' TAG AT +/- 2100'

STEP 2 - PULL 5-1/2" AND 7" BACK OUT, RUN BACK IN WITH TUBING TO LAST TAG SPOT STUB PLUG 40sx WOC AND TAG, FILL 9-5/8" FROM STUB TAG TO SURFACE IN 100sx INCREMENTS, IF UNABLE TO GET FILL OFF OF FIRST 2 SPOTS DO A GRAVEL PACK FROM TAG TO 1600' AND BRING CEMENT TO SURFACE. APPROVED BY WESLEY INGRAM AND JIM AMOS WITH BLM

6/26/2014 RIH & tag @ 3047', M&P 100sx CL C cmt, start to PUH, cmt flashed, tbg got stuck. Work tbg to 86000#, unable to pull free. WO WL.

6/27/2014 RU WL, RIH & tag cmt in tbg @ 1858'. Free point tbg From 20000-30000#, pull 90% free @ 1858'. Chemical cut tbg @ 1858', RDWL, POOH w/ tbg.

6/30/2014 NDBOP, NDWH to 5-1/2" csg, NUWH, NU BOP, POOH w/ 1916' 5-1/2" liner.

7/1/2014 ND BOP, NDWH to 7" csg. PU csg spear, spear csh, POOH w/ landing jt. Dump and flush 2.5 yards 3/8" pea gravel from 1916-1858', NU WH, spool, BOP, POOH w/ 7" csg. RIH w/ 2-7/8" tbg & tag up @ 1858', POOH.

7/2/2014 RIH & set tbg @ 1855', top off gravel pack, M&P 100sx CI C cmt, POOH, WOC. RIH & tag cmt @ 1844', M&P 100sx CL C cmt, PUH, WOC.

7/3/2014 RIH & tag cmt @ 1841', contact Jim Amos-BLM, appr 200sx plug @ 1841'. M&P 200sx CI C cmt, PUH, WOC. RIH & tag cmt @ 1841'. Contact Jim Amos-BLM appr setting CIBP @ +/- 1600', POOH.

7/7/2014 RU WL, RIH w/ 60 arm caliper tool to 1700', run log from 1700-1650', POOH. RIH w/ CBL/CCL log from 1700'-surface, POOH. RIH w/ 9-5/8" CIBP & set @ 1635', appr by Jim Amos-BLM, POOH.

7/8/2014 RIH w/ tbg & tag CIBP @ 1635', M&P 600sx CI C, circ cmt to surface, POOH, ND BOP, top off csg, RDPU.

OXY USA WTP LP - Final P&A
Elizando A Federal #2Y
API No. 30-015-21337

300sx @ 1635-Surface

CIBP @ 1635'


300sx @ 1858-1841'

2-7/8" tbg @ 1858-2650'

100sx @ 3047-1858'

2-7/8" tbg @ 3047-10462' w/ pkr @ 10455'

4/92-CIBP @ 11080' w/ 4sx to 11038'

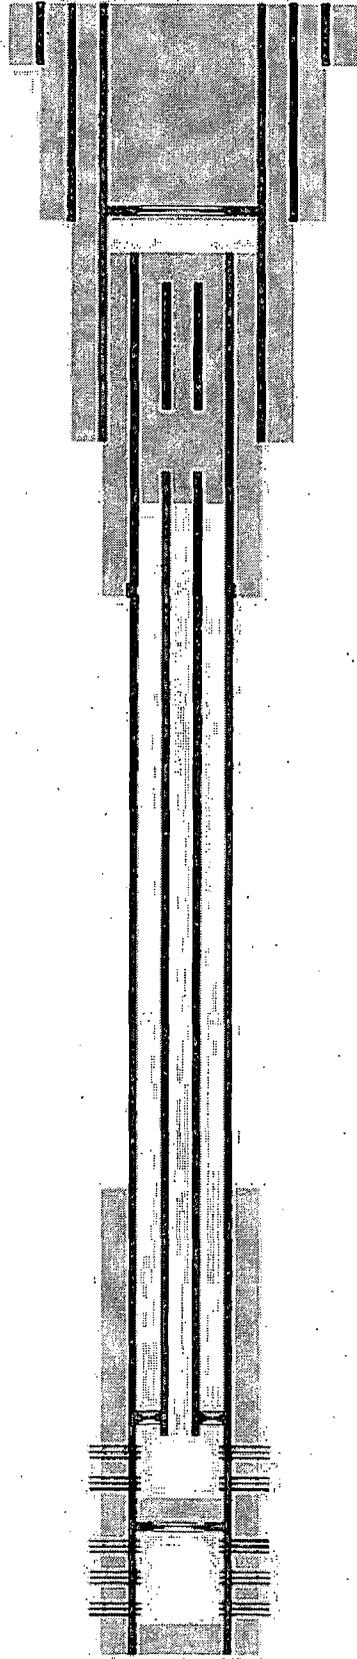

TD-11742'

26" hole @ 395'
20" csg @ 394'
w/ 780sx-TOC-Surf-Circ

17-1/2" hole @ 1654'
13-3/8" csg @ 1654'
w/ 2675sx-TOC-Surf-Circ

Pull 5-1/2" Csg 1824'

12-1/4" hole @ 3005'
9-5/8" csg @ 3005'
w/ 1475sx-TOC-Surf-Circ

1989-Repl 4298' 5-1/2" csg w/ FOT @ 4298'
cmt w/ 800sx-TOC-1039'-Calc

8-3/4" hole @ 11742'
5-1/2" csg @ 11742'
w/ 1100sx-TOC-8700'-TS

Perfs @ 10560-10569'
Perfs @ 10709-10895'

Perfs @ 11133-11684'