| | OCD Artesia | | | | | | | | |
|--|---|---|--|---|--|--|--|--|--|
| Form 3160-5 March 2012) UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT | | | | | FORM APPROVED OMB No. 1004-0137 Expires: October 31, 2014 5. Lease Serial No. | | | | |
| Do not | use this f | | DRTS ON WELLS to drill or to re-enter al APD) for such proposa | | NMLC-055264 6. If Indian, Allottee of | r Tríbe Name | | | |
| | SUBMIT | IN TRIPLICATE – Other | 7. If Unit of CA/Agreement, Name and/or No. | | | | | | |
| I. Type of Well Oil Well | 🗌 Gas W | ell Dther | 8. Well Name and No. Jackson B 6 Batttery | | | | | | |
| 2. Name of Operator Burnett Oil Co., Inc. | ···· | | | · · · · · · · · · · · · · · · · · · · | 9. API Well No. | | | | |
| 3a. Address Burnett Plaza - Suite 1500 801 Cherry Street, Unit 9 Fort Worth, Texas 76102 | | | 3b. Phone No. <i>(include area code)</i> 817-583-8730 | | 10. Field and Pool or Exploratory Area | | | | |
| 4. Location of Well (Fool 2310' FNL, 380' FWL, T17S, R3 | <i>tage, Sec., T.,I</i> 00E, Sec. 24, Uni | R., M., or Survey Description tH, SENE | 11. County or Parish, State Eddy County, NM | | | | | | |
| | 12. CHEC | K THE APPROPRIATE BO | DX(ES) TO INDICATE NATUR | RE OF NOTI | CE, REPORT OR OTHI | ER DATA | | | |
| TYPE OF SUBMI | SSION | ······································ | . T' | YPE OF ACT | TION | ······································ | | | |
| Notice of Intent | | Acidize | Deepen Fracture Treat | _ | luction (Start/Resume) amation | Water Shut-Off | | | |
| Subsequent Report | | Casing Repair | | | porarily Abandon | Other Production Facility Change | | | |
| Final Abandonment | Notice | Convert to Injection | Plug Back | Wat | er Disposal | | | | |
| the proposal is to dee Attach the Bond unde following completion | pen directiona er which the w of the involve pleted. Final A | Ily or recomplete horizontal rork will be performed or pro- ed operations. If the operation Abandonment Notices must | lly, give subsurface locations and ovide the Bond No. on file with | d measured a BLM/BIA. 1 ion or recomp | nd true vertical depths o Required subsequent rep pletion in a new interval | c and approximate duration thereof. If f all pertinent markers and zones. iorts must be filed within 30 days , a Form 3160-4 must be filed once completed and the operator has | | | |

Burnett is requesting permission to add an emergency flare to the Jackson B 6 Battery. Updated Battery diagram is attached. The flare will be located on the already existing Jackson B 41 pad.

Flare will be a minimum 150' from the battery equipment. The flare will be 35' high and will follow the API standards. Flare will be metered to record flared gas.

) 2/4/15 Hed for record MIDOD

NM OIL CONSERVATION


ARTESIA DISTRICT

JAN 26 2015

RECEIVED

| 14. I hereby certify that the foregoing is true and correct. Name (Printed/Typed) Leslie Garvis | Title Regulatory Coordinator Date | | | | | |
|--|-----------------------------------|-------------------|--|--|--|--|
| Signature Dat | | | | | | |
| THIS SPACE FOR FEDERA | L OR STATE OFFICE USE | | | | | |
| Approved by Steve Caffey | FIELD MANAGER | Date JAN 2 1 2015 | | | | |
| Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify hat the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon. | Office CARLSBAD FIELD OFFICE | | | | | |

(Instructions on page 2)

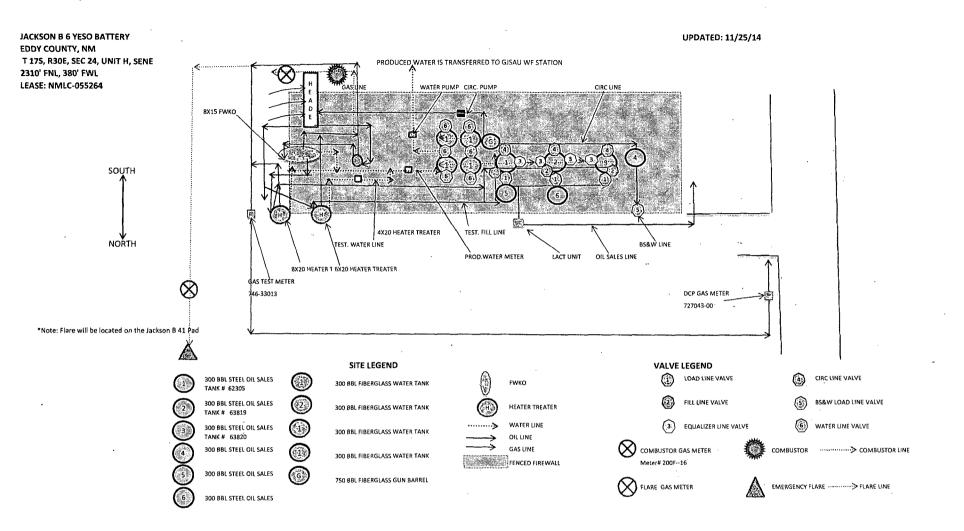

۲,

JACKSON B 6 YESO BATTERY

VALVE

T 175, R30E, SEC 24, UNIT H, SENE 2310' FNL, 380' FWL LEASE: NMLC-055264

ATTACHMENT TO SITE FACILITY DIAGRAM

General sealing of valves, sales by tank guage Production Phase:

Load Line Valves sealed closed. Fill valve to tank that is in production will be open.

Equalizer valve to tank that is in production will be open. Circulation valves will be opened as necessary, then resealed. BS&W Load Line valve will be sealed at all times, unless cleaning tanks, then resealed once tank maintenance is complete. Sales Phase:

The tank from which sales are being made will be isolated by sealing closed the fill line valve, circulating valve, and the equalizer valve during sales and opening the sales valve. Upon completion of the sale, the sales valve will be resealed. Sales by truck will be by tank gauge. Sales by LACT will be by LACT meter.

| • | . <u>VALVE</u> LOAD LINE VALVE | PRODUCTION PHASE CLOSED | <u>SALES PHASE</u> OPEN | CIRCULATING CLOSED | NOTE |
|----------------|-----------------------------------|----------------------------|----------------------------|-----------------------|---|
| 0 | PRODUCTION FILL LINE VALVE | OPEN OR CLOSED | CLOSED | CLOSED OR OPEN | |
| () | EQUALIZER LINE VALVE | OPEN | CLOSED | CLOSED OR OPEN | <i>,</i> |
| 0 | CIRCULATING LINE VALVE | OPEN OR CLOSED | CLOSED | OPEN | RE-SEALED ONCE CIRCULATING IS COMPLETE |
| ۲ | BS&W LOAD LINE VALVE | CLOSED | CLOSED | CLOSED | OPEN FOR TANK MAINTENANCE, RESEALED ONCE MAINTENANCE IS COMPLETE |
| ۲ | WATER LINE | OPEN | NA | NA | WATER TANKS ARE ISOLATED FROM OIL PRODUCTION TANKS |

JACKSON B 6 YESO BATT

JACKSON B #41 JACKSON B #44 JACKSON B #45 JACKSON B #46 JACKSON B #66 JACKSON B #67 JACKSON B #72

1