# N.M. Oil Cons. DIV-Dist. 2

UNITED STATES AUDIT OF THE CONTROL OF T DEPARTMENT OF THE INTARIOSIA, NM 88210 **BUREAU OF LAND MANAGEMENT** 

5. Lease Serial No.

NMLC 028784C

#### **APPLICATION FOR PERMIT TO DRILL OR REENTER**

6. If Indian, Allottee or Tribe Name

FORM APPROVED OMB No. 1004-0136 Expires January 31, 2004

						<u>JAN 0</u>	4 2006			
la. Type of Work:	☑ DRILL		REENTER		ood:Aatesh		7. If Unit or CA Agree	ment, Name	and No.	
	_		_		·		in the second of	NMNM88525X	U > T	
1b. Type of Well:	Oil Well	Gas Well	Other	M s	Single Zone	Multip	ile Zone	8. Lease Name and We		
2. Name of Operat		Gus wen	- Other		mgre Zone	Marin		Burch Keely Unit #3: 9. API Well No.	91	
•								9. API Well No.		
Marbob Energy C 3a. Address	orporation			3h Phone N	o (includa (	raa aada) e		10. Field and Pool, or E	lumla notamu	<del></del>
PO Box 227, Artes	sia NM 882	11-0227		3b. Phone N 505-748-3	303 UNC	DRTHC	MOY	Grbg Jackson SR Q		
4. Location of Wel					17	F & # 4 A F 11 3 31	(D)/(	11. Sec., T., R., M., or I		vey or Area
At surface 134	15' FSL & 13	45' FEL Unit	.L (NWSF)		ا شداد					
At proposed pro		SU	SJECT TO LH	ke appi	OVAL E	Y STATI	E	  Section 13 - T17S - F	R29F NMF	PM
14. Distance in miles	and direction	from nearest tow	n or post office*					12. County or Parish		3. State
			•					Eddy	INI	М
15. Distance from pr location to neare	st			16. No. of	Acrès in leas	e	17. Spacin	g Unit dedicated to this w	ell	
property or lease (Also to nearest		f any)		1440			40			
18. Distance from proposed location*				19. Propos	ed Depth		20. BLM/I	BIA Bond No. on file		
to nearest well, deapplied for, on the		ed,								
				4800'	_		`	NM 2056)		
21. Elevations (Shor	w whether DF,	KDB, RT, GL,	etc.)		ximate date	work will st	art*	23. Estimated duration		
3630' GL				12/16/05			14 days			
				24. Atta	chments					
The following, compl	eted in accorda	nce with the req	uirements of Onshor	e Oil and Ga	s Order No.1	, shall be att	ached to this	s form:		
1. Well plat certified	by a registered	surveyor.			l 4 Rond	to cover the	e operation	s unless covered by an e	visting hon	d on file (see
2. A Drilling Plan.	o,	<b>541 ( 4)</b> 51.			Item	20 above).	•	s unicss covered by an c	Alsting bon	u on me (see
3. A Surface Use Pla				Lands, the	1 -	tor certifica				
SUPO shall be file	ed with the app	ropriate Forest S	Service Office).			other site s rized office		ormation and/or plans as	may be rec	quired by the
25. Signature			Nam	Name (Printed/Typed)			Date			
	Man	10	the	Mela	nie J. Par	ker			11/15/05	
Title		- 0								
Land Department										
Approved by (Signati	/s/ Jo	e G. Lai	ra	Nam	e (Printed/T	Joe (	G. Lai	ra	DEC DEC	2 8 200
Title ACTHIELE	MANA	GER	Office CARLSBAD FIELD OFFICE							
	does not warrar	nt or certify that	the applicant holds l	egal or equita				lease which would entitle		nt to conduct
perations thereon.	ıl ifomu ove	ta ala a d				AF	PAO	VAL FOR 1	YEAR	
Conditions of approva	u, if any, are at	tached.						·/ ''   VII	1 42/111	
Title 18 U.S.C. Section	on 1001 and Ti	tle 43 U.S.C. Se	ction 1212 make it	a crime for	any nercon k	nowingly ar	d willfully	to make to any denartmer	ot or agancy	of the United

APPROVAL SUBJECT TO

GENERAL REQUIREMENTS AND SPECIAL STIPULATIONS ATTACHED

States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Roswell Controlled Water Basin

Witness Surface Casing

This APD previously approved and expired September 2005

If earthen pits are used in association with the drilling of this well, an OCD pit permit must be obtained prior to pit construction.

\*(Instructions on reverse)

State of New Mexico

980, Hobbs, NM 88241-1980

Energy, Minerals and Natural Resources Department

Form C-102 Revised February 10, 1994 Submit to Appropriate District Office State Lease - 4 Copies Fee Lease - 3 Copies

#### ASTRICT II P.O. Drawer DD, Artesia, NM 88211-0719

#### OIL CONSERVATION DIVISION P.O. Box 2088

Santa Fe, New Mexico 87504-2088


DISTRICT III 1000 Rio Brazos Rd., Aztec, NM 87410

DISTRICT IV P.O. BOX 2088, SANTA FE, N.H. 87504-2088	WELL LOCATION AND	ACREAGE DEDICATION PLAT	□ AMENDED REPORT		
API Number	Pool Code	Pool Name			
	28509	GRBG JACKSON SR Q	GRBG SA		
Property Code	Prop	Property Name			
006497	BURCH 1	391-960			
OGRID No.	Oper	ator Name	Elevation		
14049	MARBOB ENER	3630'			

#### Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
J	13	17-S	29-E		1345'	SOUTH	1345'	EAST	EDDY
Bottom Hole Location If Different From Surface									
UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
Dedicated Acres   Joint or Infill   Consolidation Code   Order No.									
40	ĺ	1		1					

## NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

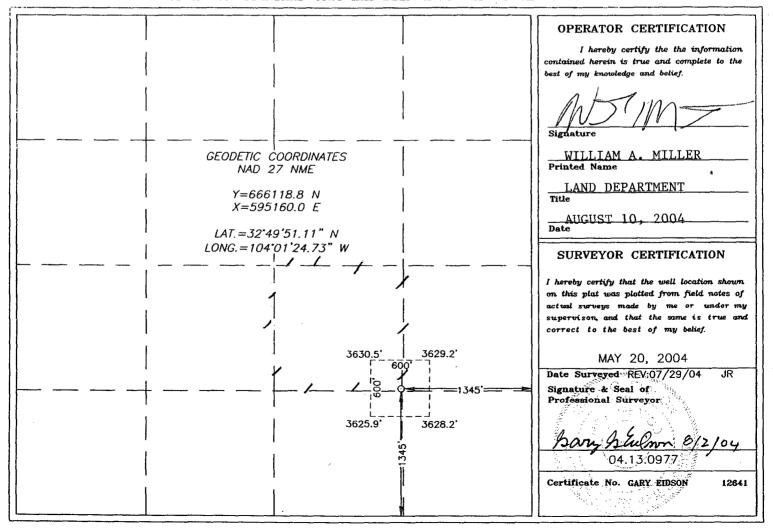

### DRILLING PROGRAM

391

Burch Keely Unit No.-960<sup>-</sup> 1345' FSL and 1345' FEL Section 13-17S-29E Eddy County, New Mexico

## 10. Anticipated Starting Date and Duration of Operations


Starting date will be scheduled upon approval.

Duration of Operations: Once commenced, the drilling operations should be completed in approximately 21 days. If the well is productive, an additional 30 to 60 days will be required for completion and testing of the well.


### SURFACE USE AND OPERATING PLAN

Burch Keely Unit No. <del>960</del> 1345' FSL and 1345' FEL Section 13-17S-29E Eddy County, New Mexico


- 1.(c) Directions to Locations: From the intersection of U.S. Hwy 82 and Co. Rd #215 go north on Co. Rd #215 0.6 miles. Turn right onto caliche road and go 0.75 miles east. Location is 700' north.
- 2. No new access road will be necessary
- 4.(a) If productive, this well will use Satellite "C".

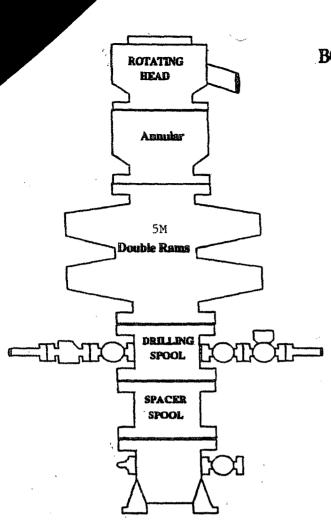

ONSHORE OIL AND GAS ORDER NO. 2

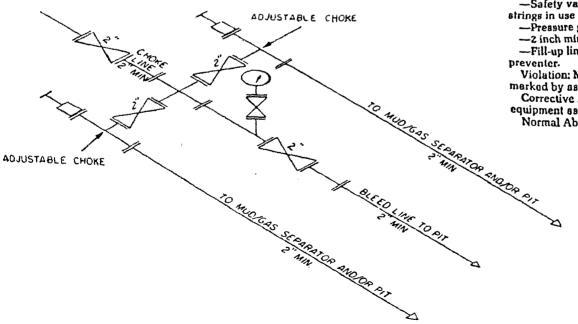

**BOPE SCHEMATIC** 

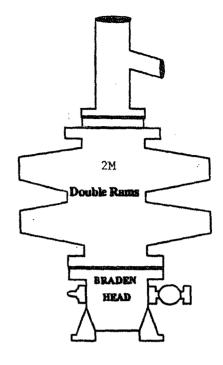

2M system:

-Annular preventer, or, double ram, or two rams with one being blind and one being a pipe ram \*

-Kill line (2 inch minimum)

-1 kill line valve (2 inch minimum)

-1 choke line valve

-2 chokes (refer to diagram in

Attachment 1)

-Upper kelly cock valve with handle available

-Safety valve and subs to fit all drill

-Pressure gauge on choke manifold'

-2 inch minimum choke line

-Fill-up line above the uppermost

Violation: Minor (all items unless

marked by asterisk).

Corrective Action: Install the

equipment as specified.

Normal Abatement Period: 24 hours.

## CARRA P'S COPY

orm 3160-5 (June 1990)

# **UNITED STATES**

JUN 2	1 1	1999
-------	-----	------

FORM APPROVED Budget Bureau No. 1004-0135

June 1990)		NT OF THE INTERIOR	Expires: March 31, 1993		
	DUREAU OF	LAND MANAGEMENT	5. Lease Designation and Serial No.		
Do not u	SUNDRY NOTICES use this form for proposals to dri Use "APPLICATION FO	6. If Indian, Allottee or Tribe Name			
	SUBMIT	7. If Unit or CA, Agreement Designation			
1. Type of V Oil We 2. Name of	Gas ell Welt Other	8. Well Name and No.			
MARBO	OB ENERGY CORPORATION		9. API Well No.		
P.O. BO	and Telephone No.  OX 227, ARTESIA, NM 88210 505-  of Well (Footage, Sec., T., R., M., or Survey De		10. Field and Pool, or Exploratory Area		
T17S-R T17S-R T17S-R	R30E	11. County or Parish, State  EDDY CO., NM			
12.	CHECK APPROPRIATE BOX(s	) TO INDICATE NATURE OF NOTICE, REPORT, C	OR OTHER DATA		
	TYPE OF SUBMISSION	TYPE OF ACTION			
	Notice of intent	Abandonment Recompletion	Change of Plans  New Construction		
	Subsequent Report	Plugging Back Casing Repair Altering Casing	Non-Routine Fracturing Water Shut-Off Conversion to Injection		
	T IIRI ADBINDINIGII NOICE	Other TEST BOPS	Dispose Water (Note: Report results of multiple completion on Well Completion or Recomplation Report and Log (orm.)		
		tate all pertinet details, and give pertinent dates, including estimated date cured and true vertical depths for all markders and zones pertinent to this			
DUE TO	O THE LOW BOTTOM HOLE PRESI ELLS IN THE ABOVE LOCATIONS	BURE OF FORMATIONS ABOVE 6000', WE ARE REQU TO TEST BOPS ON SURFACE CASING TO 1000#	JESTING BLANKET APPROVAL		
			•		
	THIS SUNDRY IS APPROVED	FOR MARBOB TO HAVE A BLANKET APPROVAL	FOR TESTING BOPS.		
	HOWEVER, THE OPERATOR W	TILL STATE ON EACH APD THIS APPLIES TO	IN ORDER TO		
	REMIND AND/OR BRING NOT	ICE TO THE BLM OFFICE AND ENGINEER RE	VIEWING THE APD		
	THAT THE WELL'S BOPE TE	STING IS COVERED BY A BLANKET APPROVA	L FOR THESE LOCATIONS		

14. I hereby certify that the foregoing is true and correct								
Signed Gobin Collins	Title	PRODUCTION ANALYST	Date	05/25/99				
(This space for Federal or State office/use) Approved by Approved by	Title	PETROLEUM ENGINEER	Date	JUN 1 6 1999				
Conditions of approval, if any:								

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.



IN REPLY REFER TO: NMNM-88525X 3180 (06200)

## United States Department of the Interior

#### **BUREAU OF LAND MANAGEMENT**

Roswell Field Office 2909 West Second St. Roswell, New Mexico 88201 www.nm.blm.gov



Marbob Energy Corporation Attention: Johnny Gray P. O. Box 227 Artesia, NM 88210

SEP 0 7 1999

#### Gentlemen:

With regard to our telephone conversation of September 2, 1999, a review of our records has found discrepancies in the casing requirements section of the conditions of approval for your APD's. As per our meeting on July 7, 1999, our office had agreed with your recommended casing procedures for shallow wells of 6000 ft. or less in T. 17 S, Rgs. 29, 30 and 31 E., NMPM. In order to correct the discrepancies, this letter states the language to be used for the conditions of approval casing requirements for all your existing APD's

Conditions of Approval-Drilling amended as follows:

- II. Casing requirements in T. 17 S., Rgs. 29, 30 and 31 E. for shallow wells less than 6,000 ft.
- 1. 8-5/8 inch surface casing should be set at approximately \_\_\_\_ ft. in the Rustler Anhydrite or in the case the salt occurs at a shallower depth above the top of the salt. The surface casing shoe shall be set in the anhydrite to ensure adequate sealing. The operator is required to use an excess of 100% cement volume to fill annulus. If cement does not circulate to surface the operator may then use ready mix cement to fill the remaining annulus.
- 2. The minimum required fill of cement behind the 5½ inch production casing is to place the top of the cement 200 ft. above the top of the uppermost hydrocarbon bearing interval or to the base of the salt.

These requirements supercede those issued in your existing, approved APD's for the shallow wells located in T. 17 S., Rgs. 29, 30 and 31 E., NMPM. If you have any question regarding this matter please call John S. Simitz at (505) 627-0288 or Armando A. Lopez at (505) 627-0248.

Sincerely,


Larry D. Bray

Acting Assistant Field Office Manager,

Lands and Minerals

Lary D. Bray

## LOCATION VERIFICATION MAP

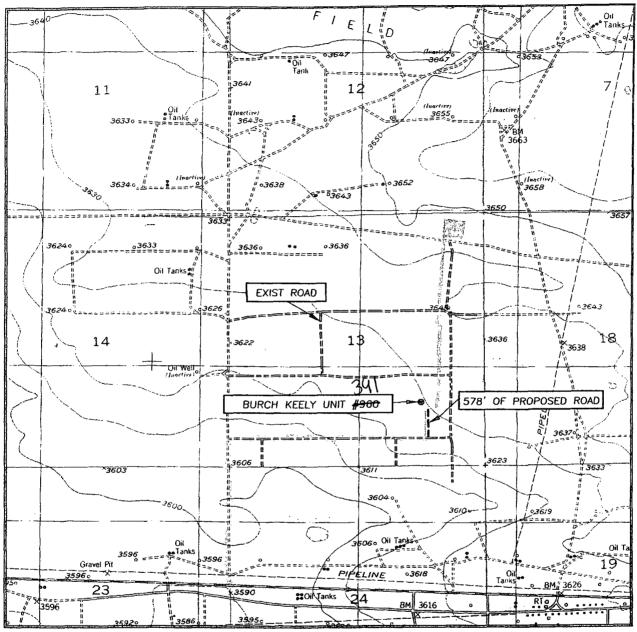

SCALE: 1" = 2000'

CONTOUR INTERVAL: RED LAKE SE, N.M. – 10'

SEC. <u>13</u> TWP. <u>17-S</u> RGE. <u>29-E</u>

SURVEY N.M.P.M.

COUNTY\_\_\_\_EDDY

DESCRIPTION 1345' FSL & 1345' FEL

ELEVATION 3630'

MARBOB ENERGY CORPORATION

LEASE BURCH KEELY UNIT

U.S.G.S. TOPOGRAPHIC MAP

RED LAKE SE, N.M.


-- Auess Road



Flow Line

PROVIDING SURVEYING SERVICES
SINCE 1948
JOHN WEST SURVEYING COMPANY
412 N. DAL PASO
HOBBS, N.U. 86240
(505) 383-3117



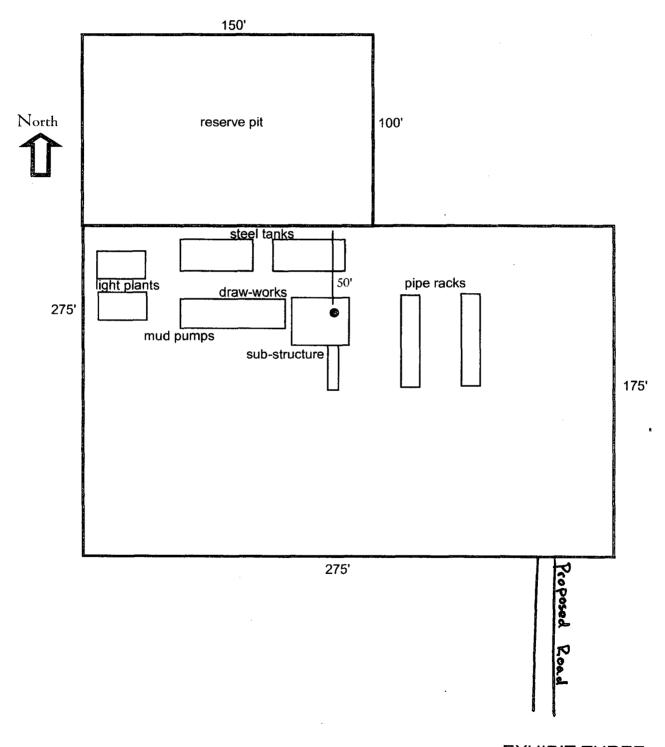

**EXHIBIT THREE**