	DEPARTMEN	IT OF THE IN	THAION CONSERVA	rtesia	Expires:	O. 1004-0135 July 31, 2010	
(August 2007) UNITED STATES DEPARTMENT OF THE INTERIOUL CONSERVATION BUREAU OF LAND MANAGEMENT _{ARTESIA} DISTRICT SUNDRY NOTICES AND REPORTS ON WELLS 0 2015 Do not use this form for proposals to drill or to ve-enter an- abandoned well. Use form 3160-3 (APD) for such proposals.				5.	 Lease Serial No. NMLC047633B If Indian, Allottee or Tribe Name 		
				6.			
SUBMIT IN TRIPLICATE - Other instructions on reverse side.					7. If Unit or CA/Agreement, Name and/or No.		
1. Type of Well				8.	8. Well Name and No. SIBYL 1 FEDERAL 1		
2. Name of Operator Contact:			STAN WAGNER er@eogresources.com		9. API Well No. 30-015-31276		
3a. Address P.O. BOX 2267 MIDLAND, TX 79702			3b. Phone No. (include area code) Ph: 432-686-3689		10. Field and Pool, or Exploratory SAND TANK; MORROW		
4. Location of Well (Footage, Sec., T., R., M., or Survey Description			<u>, </u>		. County or Parish,	and State	
Sec 1 T18S R30E 1980FNL 1134FEL				EDDY COUNT		Y, NM	
12. CHECI	K APPROPRIATE	BOX(ES) TO) INDICATE NATURE OF	NOTICE, REPO	ORT, OR OTHE	R DATA	
TYPE OF SUBMISSIO	N		TYPE OF ACTION				
The Notice of Internet	Acidiz	ie	Deepen	Production	(Start/Resume)	U Water Shut-Off	
🛛 Notice of Intent	🗖 Alter (Casing	Fracture Treat	🗖 Reclamatio	n	U Well Integrity	
Subsequent Report	🗖 Casing	g Repair	New Construction	Recomplete	ę	Other	
Final Abandonment N			Temporaril	y Abandon	—		
		·• · ·		□ Water Disposal			
If the proposal is to deepen of Attach the Bond under whic following completion of the testing has been completed.	leted Operation (clearly directionally or recompl h the work will be perfo involved operations. If Final Abandonment No	ete horizontally, ormed or provide the operation resputces shall be file	Plug Back It details, including estimated starti give subsurface locations and mea- the Bond No. on file with BLM/B sults in a multiple completion or re ed only after all requirements, inclu Remove RBA @	ng date of any proposured and true vertic. A. Required subseq completion in a new ading reclamation, ha	sed work and appro- al depths of all pertinuent reports shall be interval, a Form 316 ave been completed.	nent markers and zones. filed within 30 days f0-4 shall be filed once and the operator has	
If the proposal is to deepen a Attach the Bond under whic following completion of the testing has been completed. determined that the site is re EOG Resources propo 1. MIRU. Notify NMO 2. RIH w/CIBP and se 3. Spot 25 sx Class H 4. RIH w/ freepoint an casing.	leted Operation (clearly directionally or recomple h the work will be perfo- involved operations. If Final Abandonment Nc ady for final inspection. ses to P&A this well CD and BLM. POO et at 7800'. Dump bi- i cement plug from ad determine top of	state all pertiner ete horizontally, rrmed or provide the operation res- stices shall be file) Il as follows: H w/ rods and ail 35' cement 6000' - 6200'. free casing.	at details, including estimated starti give subsurface locations and mea- the Bond No. on file with BLM/B sults in a multiple completion or re ed only after all requirements, inclu- Remove RBA A function of the second start for CIBP of Soct 2 Add plug from Expected top at 4100'. Cut a	ng date of any propositived and true vertice. A. Required subsequences of the subsequence of the subsequenc	ised work and appro al depths of all pertin upent reports shall be interval, a Form 316 ave been completed, PIH and D. GOC 77	MATION PROCEDI	
If the proposal is to deepen of Attach the Bond under whic following completion of the testing has been completed. determined that the site is re EOG Resources propo 1. MIRU. Notify NMO 2. RIH w/CIBP and se 3. Spot 25 sx Class H 4. RIH w/ freepoint ar casing. 5. RIH to 100' below t across the 8-5/8"). WO 6. Spot 25 sx Class C	leted Operation (clearly directionally or recompl h the work will be perfo- involved operations. If Final Abandonment No ady for final inspection. ses to P&A this well CD and BLM. POO at at 7800'. Dump be cement plug from the casing cut and s C 24 hrs. TAG. cement plug from blug from 0 20'. Cut	state all pertiner ete horizontally, rmed or provide the operation res- trices shall be file all as follows: H w/ rods and all 35' cement 6000' - 6200'. free casing. I spot a 200' plu 600' - 750'. W	it details, including estimated starti give subsurface locations and mea- the Bond No. on file with BLM/B sults in a multiple completion or re ed only after all requirements, inclu- Remove RBF & I tubing. ton CIBP. or Spot 2 Had plug from Expected top at 4100'. Cut a ug, 40 sx (100' across the 5- / SOD - 1400	ng date of any proposured and true vertice. A. Required subsequences of the security of the	ised work and appro- al depths of all pertin upent reports shall be interval, a Form 316 ave been completed, 27.44 and 2.600 C 77 79. RECLA	MATION PROCEDL ATTACHED A 30/35 A shall be filed once and the operator has ATTACHED ATTACHED ATTACHED ATTACHED ATTACHED ATTACHED	
If the proposal is to deepen of Attach the Bond under whic following completion of the testing has been completed. determined that the site is re EOG Resources propo 1. MIRU. Notify NMO 2. RIH w/CIBP and se 3. Spot 25 sx Class H 4. RIH w/ freepoint ar casing. 5. RIH to 100' below t across the 8-5/8"). WO 6. Spot 25 sx Class C 7. Set 25 sx surface p	leted Operation (clearly directionally or recompl h the work will be perfo- involved operations. If Final Abandonment No ady for final inspection. ses to P&A this well CD and BLM. POO at at 7800'. Dump be cement plug from the casing cut and s C 24 hrs. TAG. cement plug from blug from 0 20'. Cut	state all pertiner ete horizontally, rmed or provide the operation res- trices shall be file all as follows: H w/ rods and ail 35' cement 6000' - 6200', free casing. I spot a 200' plu 600' - 750', W and cap well	it details, including estimated starti give subsurface locations and mea- the Bond No. on file with BLM/B sults in a multiple completion or re ed only after all requirements, inclu Remove RBA Alug from 8 I tubing. ton CIBP or Spot 2 Add Alug from Expected top at 4100'. Cut a ug, 40 sx (100' across the 5- /50D - /400 L OC 24 hrs. TAG.	ng date of any proposured and true vertice. A. Required subsequences of the subseque	ised work and appro- al depths of all pertin upent reports shall be interval, a Form 316 ave been completed, 2.14 and 2.606 77 79. RECLA E ATTACH	MATION PROCEDU ATTACHED MATION PROCEDU ATTACHED MOCD ED FOR	
If the proposal is to deepen of Attach the Bond under whic following completion of the testing has been completed. determined that the site is re EOG Resources propo 1. MIRU. Notify NMO 2. RIH w/CIBP and se 3. Spot 25 sx Class H 4. RIH w/ freepoint ar casing. 5. RIH to 100' below t across the 8-5/8"). WO 6. Spot 25 sx Class C 7. Set 25 sx surface p 8. Clean and restore I	leted Operation (clearly directionally or recompli- h the work will be perfo- involved operations. If Final Abandonment No ady for final inspection. sees to P&A this well CD and BLM. POOI et at 7800'. Dump bi- cement plug from the casing cut and s C 24 hrs. TAG. cement plug from blug from 0.20'. Cut ocation.	state all pertiner ete horizontally, prined or provide the operation res- stices shall be file) II as follows: H w/ rods and ail 35' cement 6000' - 6200'. free casing. I spot a 200' plu and cap welling the state for EOG RE	it details, including estimated starti give subsurface locations and mea- the Bond No. on file with BLM/B sults in a multiple completion or re ed only after all requirements, inclu Remove RBA Alug From 8 I tubing. ton CIBP or Spot 2 Add Alug From Expected top at 4100'. Cut a ug, 40 sx (100' across the 5- /50D - 1400 2 OC 24 hrs. TAG. nead. Place P&A marker.	ng date of any propositived and true vertice. A. Required subsequences completion in a new ding reclamation, ha \$ZDZ . \$40 - 86 \$40 - 86 \$5029 - 487 nd pull 5-1/2" 1/2" and 100' \$0 c Teg \$60 c \$500 c \$60 c 	ised work and appro- al depils of all pertin upent reports shall be interval, a Form 316 ave been completed, ELH and RECLA RECLA E ATTACH	MATION PROCEDU ATTACHED MATION PROCEDU ATTACHED MOCD ED FOR	
If the proposal is to deepen of Attach the Bond under whic following completion of the testing has been completed. determined that the site is re EOG Resources propo 1. MIRU. Notify NMO 2. RIH w/CIBP and se 3. Spot 25 sx Class H 4. RIH w/ freepoint an casing. 5. RIH to 100' below t across the 8-5/8"). WO 6. Spot 25 sx Class C 7. Set 25 sx surface p 8. Clean and restore I Below Monte State Stat	leted Operation (clearly directionally or recompli- h the work will be perfo- involved operations. If Final Abandonment No ady for final inspection. sees to P&A this well CD and BLM. POOI et at 7800'. Dump bi- cement plug from the casing cut and s C 24 hrs. TAG. cement plug from blug from 0.20'. Cut ocation.	state all pertiner ete horizontally, prined or provide the operation res- stices shall be file) II as follows: H w/ rods and ail 35' cement 6000' - 6200'. free casing. I spot a 200' plu and cap welling the state for EOG RE	th details, including estimated starti give subsurface locations and mea- the Bond No. on file with BLM/BJ puts in a multiple completion or re ed only after all requirements, inclu Remove RBA a function of the start of the a on CIBP on Sort 2 Add slug from Expected top at 4100'. Cut a ug, 40 sx (100' across the 5- /SOD - 1400 2 OC 24 hrs. TAG. nead. Place P&A marker. Markar require B08052 verified by the BLM W SOURCES, INC., sent to the processing by LINDA DENNI	ng date of any propositived and true vertice. A. Required subsequences completion in a new ding reclamation, ha \$ZDZ . \$40 - 86 \$40 - 86 \$5029 - 487 nd pull 5-1/2" 1/2" and 100' \$0 c Teg \$60 c \$500 c \$60 c 	ised work and appro- al depits of all pertin juent reports shall be interval, a Form 316 ave been completed, EXH and Conception of a conception of a conceptio	MATION PROCEDL ATTACHED MACLED FOR MACLED FOR	
If the proposal is to deepen of Attach the Bond under whic following completion of the testing has been completed. determined that the site is re EOG Resources propo 1. MIRU. Notify NMO 2. RIH W/CIBP and se 3. Spot 25 sx Class H 4. RIH w/ freepoint an casing. 5. RIH to 100' below th across the 8-5/8"). WO 6. Spot 25 sx Class C 7. Set 25 sx class C 7. Set 25 sx class C 7. Set 25 sx class C 8. Clean and restore I B. Clean and restore I A. I hereby certify that the for Name(Printed/Typed) ST	leted Operation (clearly directionally or recomple h the work will be perfo- involved operations. If Final Abandonment No ady for final inspection. sess to P&A this well CD and BLM. POOI et at 7800'. Dump bi- cement plug from bi- d determine top of the casing cut and s C 24 hrs. TAG. cement plug from blug from 0.20'. Cut ocation.	state all pertiner ete horizontally, prined or provide the operation res- stices shall be file) II as follows: H w/ rods and ail 35' cement 6000' - 6200'. free casing. I spot a 200' plu and cap welling the state for EOG RE	th details, including estimated starti give subsurface locations and mea- the Bond No. on file with BLM/BJ puts in a multiple completion or re ed only after all requirements, inclu Remove RBA a function of the start of the a on CIBP on Sort 2 Add slug from Expected top at 4100'. Cut a ug, 40 sx (100' across the 5- /SOD - 1400 2 OC 24 hrs. TAG. nead. Place P&A marker. Markar require B08052 verified by the BLM W SOURCES, INC., sent to the processing by LINDA DENNI	ng date of any propositived and true vertice. A. Required subsequences of the vertice of the v	ised work and appro- al depits of all pertin juent reports shall be interval, a Form 316 ave been completed, EXH and Conception of a conception of a conceptio	MATION PROCEDU ATTACHED MATION PROCEDU ATTACHED MOCD ED FOR	
If the proposal is to deepen of Attach the Bond under whic following completion of the testing has been completed. determined that the site is re EOG Resources propo 1. MIRU. Notify NMO 2. RIH W/CIBP and se 3. Spot 25 sx Class H 4. RIH w/ freepoint an casing. 5. RIH to 100' below t across the 8-5/8"). WO 6. Spot 25 sx Class C 7. Set 25 sx surface p 8. Clean and restore I Below Monte 14. I hereby certify that the for Name (Printed/Typed) ST	leted Operation (clearly directionally or recompl h the work will be perfo- involved operations. If Final Abandonment Ne ady for final inspection. sess to P&A this well CD and BLM. POO the casing Cut and so the casing cut and so C 24 hrs. TAG. cement plug from the casing cut and so C 24 hrs. TAG. cement plug from blug from 0.20°. Cut ocation. determine to corre- Electronic Committed AN WAGNER	state all pertiner ete horizontally, rrmed or provide the operation res- stices shall be file) II as follows: H w/ rods and ail 35' cement 6000' - 6200'. free casing. I spot a 200' plu def file 600' - 750'. W and cap well submission # For EOG RE to AFMSS for	at details, including estimated starti give subsurface locations and mea- the Bond No. on file with BLM/BJ sults in a multiple completion or re ed only after all requirements, inclu- Remove RBA a function of the start of the remove RBA a function of the start of the start of the start of the start of the start of the start of the start of the remove removes the start of the remove removes the start of the sources, INC., sent to the processing by LINDA DENNI Title REGL	ng date of any proposured and true vertice. A. Required subsequences completion in a new iding reclamation, ha 82D2. A 840 - 8642 5029 - 487 ind pull 5-1/2" 1/2" and 100' 20C Teg 1/2" and 100' 20C Teg 20C	sed work and appro- al depths of all pertin uent reports shall be interval, a Form 316 ave been completed, 2.74. RECLA 79. RECLA C. C. C. C. E ATTACH NULTIONS (Stem D15 () YST	MATION PROCEDU ATTACHED MATION PROCEDU ATTACHED MOCO ED FOR	
If the proposal is to deepen of Attach the Bond under whic following completion of the testing has been completed. determined that the site is re EOG Resources propo 1. MIRU. Notify NMO 2. RIH w/CIBP and se 3. Spot 25 sx Class H 4. RIH w/ freepoint ar casing. 5. RIH to 100' below t across the 8-5/8"). WO 6. Spot 25 sx Class C 7. Set 25 sx Surface p 8. Clean and restore I Below Grou 14. I hereby certify that the for Name (<i>Printed/Typed</i>) ST Signature (Ele	leted Operation (clearly directionally or recompli- h the work will be perfo- involved operations. If Final Abandonment No ady for final inspection. sees to P&A this well CD and BLM. POO: the case of the case of the case of the case of the case of the case of the case of the case of the case of the case of the case of the case of the case of the case of the case of the case o	state all pertiner ete horizontally, rrmed or provide the operation res- stices shall be file) II as follows: H w/ rods and ail 35' cement 6000' - 6200'. free casing. I spot a 200' plu def file 600' - 750'. W and cap well submission # For EOG RE to AFMSS for	at details, including estimated starti give subsurface locations and mea- the Bond No. on file with BLM/Bi- sults in a multiple completion or re ed only after all requirements, inch Remove RBF at the prove RBF at the prov	ng date of any proposured and true vertice. A. Required subsequences completion in a new iding reclamation, ha 82D2. A 840 - 8642 5029 - 487 ind pull 5-1/2" 1/2" and 100' 20C Teg 1/2" and 100' 20C Teg 20C	sed work and appro- al depths of all pertin uent reports shall be interval, a Form 316 ave been completed, 2.74. RECLA 79. RECLA C. C. C. C. E ATTACH NULTIONS (Stem D15 () YST	MATION PROCEDU ATTACHED MATION PROCEDU ATTACHED MOCD ED FOR	
If the proposal is to deepen of Attach the Bond under whic following completion of the testing has been completed. determined that the site is re EOG Resources propo 1. MIRU. Notify NMOD 2. RIH w/CIBP and se 3. Spot 25 sx Class H 4. RIH w/ freepoint ar casing. 5. RIH to 100' below t across the 8-5/8"). WO 6. Spot 25 sx Class C 7. Set 25 sx Class C 7. Set 25 sx class C 7. Set 25 sx surface p 8. Clean and restore H Belev Monute 14. 1 hereby certify that the for Name (Printed/Typed) ST Signature (Ele	leted Operation (clearly directionally or recompli- h the work will be perfo- involved operations. If Final Abandonment Ne ady for final inspection. sees to P&A this well CD and BLM. POO et at 7800'. Dump be comment plug from be determine top of the casing cut and s C 24 hrs. TAG. cement plug from blug from 0.20'. Cut ocation. degoing is true and correc Electronic Committed AN WAGNER extronic Submission) THIS	state all pertiner ete horizontally, rrmed or provide the operation res- stices shall be file) II as follows: H w/ rods and ail 35' cement 6000' - 6200'. free casing. Spot a 200' plu def free casing. Submission # Submission # For EOG RE to AFMSS for SPACE FC	at details, including estimated starti give subsurface locations and mea- the Bond No. on file with BLM/BJ sults in a multiple completion or re ed only after all requirements, inch Remove RSA a tubing. to n CIBP or Sort 2 Add Slass From Expected top at 4100'. Cut a ug, 40 sx (100' across the 5- /50D - /400 / CC 24 hrs. TAG. nead. Place P&A marker. Markar require processing by LINDA DENNI Title REGL Date 07/06/ DR FEDERAL OR STATE 	ng date of any proposured and true vertice. A. Required subsequences completion in a new iding reclamation, ha 82D2. A 840 - 8642 5029 - 487 ind pull 5-1/2" 1/2" and 100' 20C Teg 1/2" and 100' 20C Teg 20C	sed work and appro- al depths of all pertin uent reports shall be interval, a Form 316 ave been completed, 2.74. RECLA 79. RECLA C. E ATTACH NUTTIONS (Stem D15 () YST	ATTACHED PC Filed Vithin 30 days 50-4 shall be filed once and the operator has Sport T/World ATTACHED PC 9/30/JS COPIED FOR ED FOR OF APPROV 9-17-15	


1

** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED **

• · · · ·

.

Black 1422 54 2454 62 4954, 1 122 8750 54, 10490 Ê \$ 5511 STIW ch 11 775 SPUD NEN DRULING LAST REVISED 1120weed tool 06.501 LSV#" 32# HICK-SS/155.4, 4,199" CAT to Surface 5-112" 17# P-118/NBD TOC 4,150" Temp Survey 11-JI4" 426 Hj-40 ig 66?" CNFF to Starfare 2-726° 6, 4 1, 20 2) 4 10.426° **Deog resources** Hule CIBP+35' & ILA25' / Suran at 10.672'-708' Morrun Perfis 11,311-427 Morraw Perfec 11,498'-11,597' PBTD: 11,805 A REAL PROPERTY OF Sibyl 1 FC #1 APIN 30-015-31274 Sector, 7185, #39E an []] | Eddy, NH CONTRACTOR AND A STREET AND ADDRESS CIBP + 35' 11.240' ١

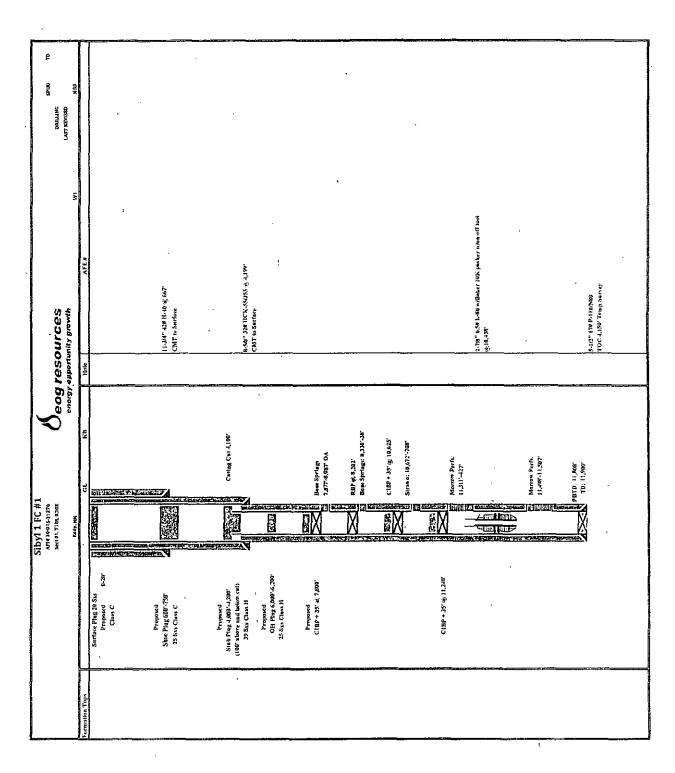

144 とうないないないがなったので、「ないないないないない」 这些的。如此是我们的是我们的是这些是我们就是我们是我们的是我们的我们的。" 第二章

ί,

BUREAU OF LAND MANAGEMENT Carlsbad Field Office 620 East Greene Street Carlsbad, New Mexico 88220 575-234-5972

Permanent Abandonment of Federal Wells Conditions of Approval (LPC Habitat)

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within <u>ninety (90)</u> days from the approval date of this Notice of Intent to Abandon.

If you are unable to plug the well by the 90th day provide this office, prior to the 90th day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.

The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.

2. <u>Notification:</u> Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Eddy County, call 575-361-2822; Lea County, call 575-393-3612.

3. <u>Blowout Preventers</u>: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.

4. <u>Mud Requirement:</u> Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of **brine** water. Minimum nine (9) pounds per gallon.

5. <u>Cement Requirement</u>: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. Before pumping or bailing cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

6. <u>Below Ground Level Cap (Lesser Prairie-Chicken Habitat)</u>: All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The BLM is to be notified a minimum of 4 hours prior to the wellhead being cut off to verify that cement is to surface in the casing and all annuluses. Wellhead cut off shall commence within ten (10) calendar days of the well being plugged. If the cut off cannot be done by the 10th day, the BLM is to be contacted with justification to receive an extension for completing the cut off. Upon the plugging and subsequent abandonment of wells that are located in lesser prairie-chicken habitat, the casings shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The well bore shall then be covered with a metal plate at least ¼ inch thick and welded in place. A weep hole shall be left in the plate and/or casing.

NMOCD also requires the operator to notify NMOCD when this type of dry hole marker is used. This can be done on the subsequent report of abandonment which is submitted to the BLM after the well is plugged. State that a below ground cap was installed as required in the COA's from the BLM.

7. <u>Subsequent Plugging Reporting</u>: Within 30 days after plugging work is completed, file one original and three copies of the Subsequent Report of Abandonment, Form 3160-5 to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. <u>Show date well was plugged.</u>

8. <u>Trash</u>: All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration will be required. See attached reclamation objectives.

<u>Timing Limitation Stipulation/ Condition of Approval for Lesser Prairie-Chicken:</u> From March 1st through June 15th annually, abandonment activities will be allowed except between the hours from 3:00 am and 9:00 am. Normal vehicle use on existing roads will not be restricted



BUREAU OF LAND MANAGEMENT Carlsbad Field Office 620 E. Greene St. Carlsbad, New Mexico 88220-6292 www.blm.gov/nm



In Reply Refer To: 1310

Reclamation Objectives and Procedures

Reclamation Objective: Oil and gas development is one of many uses of the public lands and resources. While development may have a short- or long-term effect on the land, successful reclamation can ensure the effect is not permanent. During the life of the development, all disturbed areas not needed for active support of production operations should undergo "interim" reclamation in order to minimize the environmental impacts of development on other resources and uses. At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land and water are restored.

The long-term objective of final reclamation is to set the course for eventual ecosystem restoration, including the restoration of the natural vegetation community, hydrology, and wildlife habitats. In most cases this means returning the land to a condition approximating or equal to that which existed prior to the disturbance. The final goal of reclamation is to restore the character of the land and water to its predisturbance condition. The operator is generally not responsible for achieving full ecological restoration of the site. Instead, the operator must achieve the short-term stability, visual, hydrological, and productivity objectives of the surface management agency and take steps necessary to ensure that long-term objectives will be reached through natural processes.

To achieve these objectives, remove any and all contaminants, scrap/trash, equipment, pipelines and powerlines. Strip and remove caliche, contour the location to blend with the surrounding landscape, redistribute the native soils, provide erosion control as needed, rip and seed as specified in the original APD COA. This will apply to well pads, facilities, and access roads. Barricade access road at the starting point. If reserve pits have not reclaimed due to salts or other contaminants, submit a plan for approval, as to how you propose to provide adequate restoration of the pit area.

- The Application for Permit to Drill or Reenter (APD, Form 3160-3), Surface Use Plan of Operations must include adequate measures for stabilization and reclamation of disturbed lands. Oil and Gas operators must plan for reclamation, both interim and final, up front in the APD process as per Onshore Oil and Gas Order No. 1.
- 2. For wells and/or access roads not having an approved plan, or an inadequate plan for surface reclamation (either interim or final reclamation), the operator must submit a proposal describing the procedures for reclamation. For interim reclamation, the appropriate time for submittal would be when filing the Well Completion or Recompletion Report and Log (Form 3160-4). For final reclamation, the appropriate time for submittal would be when filing the Notice of Intent, or the Subsequent Report of Abandonment, Sundry Notices and Reports on Wells (Form 3160-5). Interim reclamation is to be completed within 6 months of well completion, and final reclamation is to be completed within 6 months.
- 3. The operator must file a Subsequent Report Plug and Abandonment (Form 3160-5) following the plugging of a well.
- 4. Previous instruction had you waiting for a BLM specialist to inspect the location and provide you with reclamation requirements. If you have an approved Surface Use Plan of Operation and/or an approved Sundry Notice, you are free to proceed with reclamation as per approved APD. If you have issues or concerns, contact a BLM specialist to assist you. It would be in your interest to have a BLM specialist look at the location and access road prior to the removal of reclamation

equipment to ensure that it meets BLM objectives. Upon conclusion submit a Form 3160-5, Subsequent Report of Reclamation. This will prompt a specialist to inspect the location to verify work was completed as per approved plans.

- 5. The approved Subsequent Report of Reclamation will be your notice that the native soils, contour and seedbed have been reestablished. If the BLM objectives have not been met the operator will be notified and corrective actions may be required.
- 6. It is the responsibility of the operator to monitor these locations and/or access roads until such time as the operator feels that the BLM objective has been met. If after two growing seasons the location and/or access roads are not showing the potential for successful revegetation, additional actions may be needed. When you feel the BLM objectives have been met submit a Final Abandonment Notice (FAN), Form 3160-5, stating that all reclamation requirements have been achieved and the location and/or access road is ready for a final abandonment inspection.
- 7. At this time the BLM specialist will inspect the location and/or access road. If the native soils and contour have been restored, and the revegetation is successful, the FAN will be approved, releasing the operator of any further liability of the location and/or access road. If the location and/or access road have not achieved the objective, you will be notified as to additional work needed or additional time being needed to achieve the objective.

If there are any questions, please feel free to contact any of the following specialists:

Jim Amos Supervisory Petroleum Engineering Tech 575-234-5909, 575-361-2648 (Cell)

Arthur Arias Environmental Protection Specialist 575-234-6230

Linda Denniston Environmental Protection Specialist 575-234-5974

Henryetta Price Environmental Protection Specialist 575-234-5951

Dara Glass Environmental Protection Specialist 575-234-5924

Shelly Tucker Environmental Protection Specialist 575-234-5979