


OPERATOR: Memorial <i>Resource Development</i>	LEASE / WELL: LYNN #3	ULSTR: F-26-16S-26E	API: 30-015-42465
DRILLING RIG: SILVER OAK #11	COUNTY / STATE: EDDO COUNTY, NEW MEXICO	SURFACE LOCATION: 1658 FNL 2327 FWL	FIELD: Atoka

DIRECTIONAL DATA			TUBULAR DATA							WELLHEAD DATA		
KDP:			Tubulars	Size	Weight	Grade	Thread	MD	TYD	BKS	TYPE	
MAX DEV:	deg @	MD	DRIVE PIPE								WP	
DEV @ PERFS	deg @	MD	CONDUCTOR								T	FLANGE
DEV @ PERFS	deg @	MD	SURFACE	8-5/8"	24#	J-55	STC	929'		633	R	
DEV @ PERFS	deg @	MD	INTERMEDIATE								E	THREAD
			PRODUCTION	5-1/2"	17#	I-80	LTC	3439'		275	E	
DRILLING / COMPLETION FLUID			PROD TIEBACK								TUBING HANGER:	
DRILLING FLUID	ppg		PROD LINER (TOP)								BTM FLANGE:	
DRILLING FLUID	ppg		PROD LINER (BOTTOM)								BPV PROFILE:	
DRILLING FLUID	ppg		TUBING (Short String)								ELEVATIONS:	
COMPLETION FLUID	ppg		TUBING (Long String)	2 7/8"	6.4#	J-55	EUE 8 rnd	3268'			RKB-DF: 17'	GROUND ELEVATION
PACKER FLUID	ppg		COILED TUBING								RKB-ELEV: 3326'	3308'

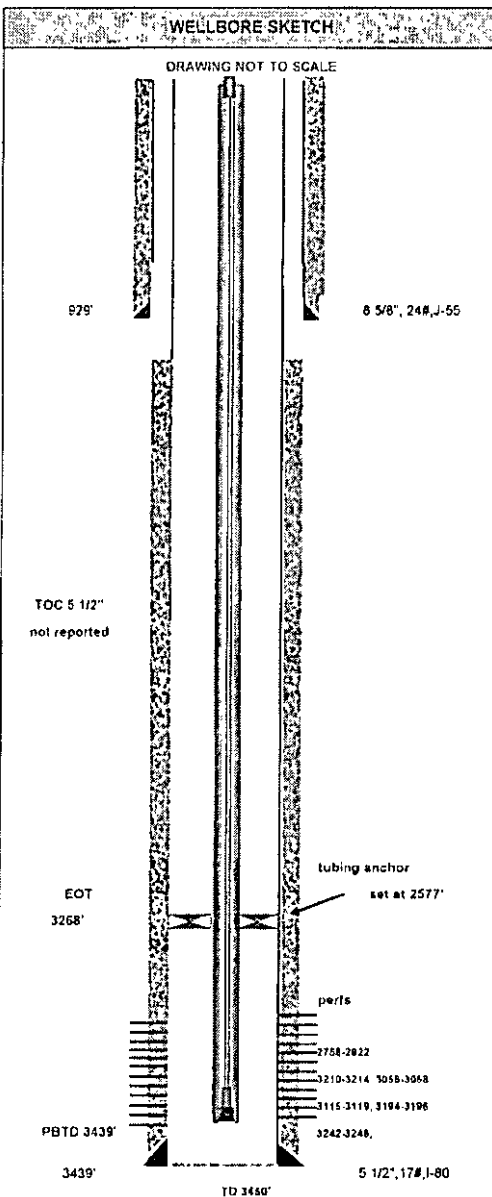

EQUIPMENT DESCRIPTION	ID	OD	DEPTH TVD	DEPTH MD
Top of surface casing cement at surface after top job				
Surface Casing: 8 5/8", 24#, J-55				
22 joints 8 5/8", 24#, J-55 csg and shoe				929'
all depths approximate				
Production Casing: 5 1/2", 17#, J-80				
78 joints 5 1/2", 17#, I-80 Casing				
shoe				3439'
Tubing Detail				
78 jnts 2 7/8" tbg				
5 1/2" x 2 7/8" Tubing Anchor				2577'
20 joints 2 7/8" J-55 8 rnd tbg				
2 7/8 GN				3230'
4' x 2 7/8" perf sub				
mud anchor				
bull plug				3268'
Rod String Detail				
22' x 1 1/4" Polish Rod with 1 1/2" x 12' liner				
67 7/8" D78" rods and 1 4' pony rod				
12 7/8" D90 rods				
18 7/8" D78" rods				
12 1 1/2" sinker bars with 3/4" pins				
2 1/2" x 1 3/4" x 16" RHBC pump with 2 5/16" spiral rod guide and 1 3/4" RH back off tool and 6' gas anchor				
COMMENTS:	WI %:	PLUG BACK DEPTH:		3439'
API # 30-015-42465	NRI %:	TOTAL WELL DEPTH:		3450'
Property#		PREPARED OR	DATE:	
Spud Date: 9/18/2014		REVISED BY:		
Completed: 2/28/2015		Ray Luis	April 10/2015	

Current

DIRECTIONS TO LOCATION: