	UNITED STATES DEPARTMENT OF THE INTERIOR					FORM APPROVED OMB NO. 1004-0135 Expires: July 31, 2010		
		UREAU OF LAND MANAGEMENT NOTICES AND REPORTS ON WELLS				5. Lease Serial No. NMLC049648A		
Do not use this form for proposals to drill or to re abandoned well. Use form 3160-3 (APD) for such p				-enter an	nter an			
SUBMIT IN TRIPLICATE - Other instructions on reverse side.					·	7. If Unit or CA/Agreement, Name and/or No.		
						-		
1. Type of Well Gas Well Other						8. Well Name and No. JULIA A FED 3		
2. Name of Operator Contact: MIKE PIPPIN LIME ROCK RESOURCES II A LP						9. API Well No. 30-015-00779-00-S1		
3a. Address 1111 BAGBY STREET SUITE 4600 HOUSTON, TX 77002			3b. Phone No. (include area code) Ph: 505.327.4573)	10. Field and Pool, or Exploratory RED LAKE		
4. Location of Well (Footage, Sec., T., R., M., or Survey Description)						11. County or Parish, and State		
Sec 5 T18S R27	'E SWNW 231	10FNL 990FWL				EDDY COUNT	Y, NM	
12. 0	CHECK APPI	ROPRIATE BOX(ES) TO) INDICATE	E NATURE OF	NOTICE, RI	EPORT, OR OTHE	ER DATA	
TYPE OF SUBM	AISSION	SION TYPE OF						
🔀 Notice of Intent	t		🗖 Dee	-	—	ion (Start/Resume)	□ Water Shut-Off	
🗖 Subsequent Rep	port	 Alter Casing Casing Repair 	—	cture Treat v Construction	□ Reclam □ Recomp		Well Integrity Other	
Final Abandonr	ment Notice	Change Plans	—	New Construction Plug and Abandon		mporarily Abandon		
_				5		•		
If the proposal is to c Attach the Bond und following completion	deepen direction: ler which the wor n of the involved	Convert to Injection eration (clearly state all pertiner ally or recomplete horizontally, rk will be performed or provide operations. If the operation re-	give subsurface the Bond No. or sults in a multipl	ing estimated startin locations and measu n file with BLM/BI/ le completion or rec	ured and true ve A. Required sul ompletion in a r	roposed work and appro ertical depths of all perti bsequent reports shall b new interval, a Form 31	nent markers and zones. e filed within 30 days 60-4 shall be filed once	
If the proposal is to o Attach the Bond und following completion testing has been com determined that the s THIS NOTICE IS LIME ROCK woo Determine wheth	deepen directiona ler which the wor in of the involved spleted. Final At site is ready for fi S TO P&A. uld like to P&A her 10? 40.5#	eration (clearly state all pertiner ally or recomplete horizontally, k will be performed or provide operations. If the operation re- bandonment Notices shall be fil- inal inspection.) A this Red Lake, Queen-G conductor csg is still in h	nt details, includ give subsurface the Bond No, o sults in a multip ed only after all Grayburg-San ole. Retrieve	ing estimated startin locations and measu n file with BLM/BI/ le completion or rec requirements, includ Andres well as 5-1/2? RBP @	follows: MIF 4472. TIH 8	roposed work and appro- errical depths of all perti- bacequent reports shall b new interval, a Form 31 n, have been completed RUSU.	inent markers and zones. e filed within 30 days 60-4 shall be filed once , and the operator has	
If the proposal is to a Attach the Bond und following completion testing has been com determined that the s THIS NOTICE IS LIME ROCK would Determine wheth 5-1/2? CIBP @ 1 does not test, sp 1752?, 7? shoe	deepen directions ler which the wor no of the involved spleted. Final At site is ready for fi S TO P&A. uld like to P&A her 10? 40.5# 1752?. Load tot of tag subs @ 1540?, 8-1	A this Red Lake, Queen-G conductor csg is still in r csg w/water & circ clean. csg w/water & circ clean. csg w/water & circ clean. csg w/exer @ 1069?. W/er	nt details, includ give subsurface the Bond No. or sults in a multipi ed only after all Grayburg-San ole. Retrieve Pressure tes ate. Plug #1 nd of tbg @ 1	Andres well as 5-1/2? RBP @ 5-1/2? csg to 5 772?, pump example: 5-1/2? csg to 5 5-1/2? csg to	follows: MIF 447?. TIH 8 500 psi. If cs 500 psi. If cs cct y 85 sx cn	RUSU. tag sg nt (733').	inent markers and zones, e filed within 30 days 60-4 shall be filed once , and the operator has	
If the proposal is to a Attach the Bond und following completion testing has been com determined that the s THIS NOTICE IS LIME ROCK woo Determine wheth 5-1/2? CIBP @ 1 does not test, sp 1752?, 7? shoe 4 TOH. WOC. Ta 3 SQ holes throu annulus to surface surface csg flang	deepen directiona der which the word no of the involved pleted. Final At site is ready for fi S TO P&A. Uld like to P&A her 10? 40.5# 1752?. Load word of tag subs @ 1540?, 8-1 ag cmt. Circ h ugh both 5-1/2 ce. Pump ~1 ge. Top off cs	eration (clearly state all pertiner ally or recomplete horizontally, rk will be performed or provide operations. If the operation re- pandonment Notices shall be fil- inal inspection.) A this Red Lake, Queen-G conductor csg is still in h csg w/water & circ clean.	Art details, includ give subsurface the Bond No. or sults in a multiple ed only after all Grayburg-San ole. Retrieve Pressure tes ate. Plug #1 nd of tbg @ 1 el/100 bbls wa tablish rate up 7? annulu arker with cm	Andres well as 5-1/2? RBP @ 5-1/2? RBP @ 5-1/2? RBP @ 5-1/2? RBP @ 5-1/2? RBP @ 5-1/2? nump exa 5-1/2? nump exa 5-1/2? nump exa 5-1/2? nump exa 5-1/2? course cut 5-1/2? cours	follows: MIF 447?. TIH & 500 psi. If cs cop CIBP @ ctly 85 sx cn 00?-Surface ki/2? & out 7? it off csg belg government	RUSU. NM C a tag sg nt (733'). . Perf ow	inent markers and zones. e filed within 30 days 60-4 shall be filed once , and the operator has DIL CONSERVAT ARTESIA DISTRICT	
If the proposal is to a Attach the Bond und following completion testing has been com determined that the s THIS NOTICE IS LIME ROCK woo Determine wheth 5-1/2? CIBP @ 1 does not test, sp 1752?, 7? shoe 4 TOH. WOC. Ta 3 SQ holes throu annulus to surface surface csg flang	deepen directiona der which the word no of the involved pleted. Final At site is ready for fi S TO P&A. Uld like to P&A her 10? 40.5# 1752?. Load word of tag subs @ 1540?, 8-1 ag cmt. Circ h ugh both 5-1/2 ce. Pump ~1 ge. Top off cs	A this Red Lake, Queen-G conductor csg is still in h csg w/water & circ clean. sequent plugs as appropri /4? shoe @ 1069?. W/er tole w/P&A mud (25 sx ge 2? & 7? csgs @ 700?. Es 43 sx cmt down 5-1/2? & 43 sw/cmt. Install P&A ma	Art details, includ give subsurface the Bond No. or sults in a multiple ed only after all Grayburg-San ole. Retrieve Pressure tes ate. Plug #1 nd of tbg @ 1 el/100 bbls wa tablish rate up 7? annulu arker with cm	Andres well as 5-1/2? RBP @ 5-1/2? RBP @ 5-1/2? RBP @ 5-1/2? RBP @ 5-1/2? RBP @ 5-1/2? nump exa 5-1/2? nump exa 5-1/2? nump exa 5-1/2? nump exa 5-1/2? course cut 5-1/2? cours	follows: MIF 447?. TIH & 500 psi. If cs cop CIBP @ ctly 85 sx cn 00?-Surface ki/2? & out 7? it off csg belg government	RUSU. NM C a tag sg nt (733'). . Perf ow	inent markers and zones, e filed within 30 days 60-4 shall be filed once , and the operator has DIL CONSERVAT ARTESIA DISTRICT DEC 09 2015	
If the proposal is to a Attach the Bond und following completion testing has been com determined that the s THIS NOTICE IS LIME ROCK woo Determine wheth 5-1/2? CIBP @ 1 does not test, sp 1752?, 7? shoe 4 TOH. WOC. Ta 3 SQ holes throu annulus to surface surface csg flang	deepen directiona ler which the wor no f the involved apleted. Final At site is ready for fi S TO P&A. uld like to P&/ her 10? 40.5# 1752?. Load wot of tag subs @ 1540?, 8-1 ag cmt. Circ h ugh both 5-1/2 ce. Pump ~14 ge. Top off cs e off location, the foregoing is	ration (clearly state all pertiner ally or recomplete horizontally, rk will be performed or provide l operations. If the operation re- bandonment Notices shall be fil- inal inspection.) A this Red Lake, Queen-G conductor csg is still in h- csg w/water & circ clean. sequent plugs as appropri /4? shoe @ 1069?. W/er tole w/P&A mud (25 sx ge 2? & 7? csgs @ 700?. Es 43 sx cmt down 5-1/2? & ags w/cmt. Install P&A ma cut off anchors & restore inter and correct. Electronic Submission # For LIME ROCK	Art details, includ give subsurface the Bond No. or sults in a multiple of only after all Grayburg-San ole. Retrieve Pressure tes ate. Plug #1 and of tbg @ 1 el/100 bbls was tablish rate w up 7? annulu arker with cm location. Sec 322521 verifie RESOURCES	Andres well as completion or rec requirements, includ Andres well as 5-1/2? RBP @ st 5-1/2? csg to 5 5-1/2? csg to 5 5-1/2? cy nump exa to 5-1/2? cy nump exa to 5-1/2? cy nump exa to surface. Cu to surface. Cu t to comply with e attached wellb	follows: MIF 447?. TIH & 500 psi. If cs 500 psi. If cs 500 psi. If cs 500 psi. If cs 500 cIBP @ ctly 85 sx cn 00?-Surface 1/2? & out 7? it off csg bela government ore diagrams	RUSU. A tag Sg nt (733'). Perf Sow S. NMC NMC NMC NMC NMC NMC NMC NMC	inent markers and zones, e filed within 30 days 60-4 shall be filed once , and the operator has DIL CONSERVAT ARTESIA DISTRICT DEC 09 2015	
If the proposal is to a Attach the Bond und following completion testing has been com determined that the s THIS NOTICE IS LIME ROCK would Determine wheth 5-1/2? CIBP @ 1 does not test, sp 1752?, 7? shoe a TOH. WOC. Ta 3 SQ holes throu annulus to surface surface csg flang specs. RD move	deepen directiona ler which the wor no f the involved apleted. Final At site is ready for fi S TO P&A. uld like to P&/ her 10? 40.5# 1752?. Load ot of tag subs @ 1540?, 8-1 ag cmt. Circ h ugh both 5-1/2 ce. Pump ~1/ ge. Top off cs e off location, t the foregoing is Commit	eration (clearly state all pertiner ally or recomplete horizontally, rk will be performed or provide l operations. If the operation re- bandonment Notices shall be fil- inal inspection.) A this Red Lake, Queen-G conductor csg is still in h csg w/water & circ clean. sequent plugs as appropri /4? shoe @ 1069?. W/er iole w/P&A mud (25 sx ge 2? & 7? csgs @ 700?. Es 43 sx cmt down 5-1/2? & sgs w/cmt. Install P&A ma cut off anchors & restore strue and correct. Electronic Submission # For LIME ROCK tted to AFMSS for processi	Art details, includ give subsurface the Bond No. or sults in a multiple of only after all Grayburg-San ole. Retrieve Pressure tes ate. Plug #1 and of tbg @ 1 el/100 bbls was tablish rate w up 7? annulu arker with cm location. Sec 322521 verifie RESOURCES	Andres well as a file with BLM/BI/ le completion or rec requirements, include Andres well as a 5-1/2? RBP @ st 5-1/2? csg to 5 ater). Plug #2, 7 //water down 5- s to surface. Cut t to comply with e attached wellb d by the BLM We II A LP, sent to OPHER WALLS	follows: MIF 447?. TIH & 500 psi. If cs 500 psi. If cs 500 psi. If cs 500 psi. If cs 500 cIBP @ ctly 85 sx cn 00?-Surface 1/2? & out 7? it off csg bela government ore diagrams	roposed work and appro- roposed work and appro- rrical depths of all perti- bacequent reports shall b new interval, a Form 31 n, have been completed RUSU. NM C A tag 5g nt (733'). . Perf ow s. . <i>M</i> 1 System 5 (16CRW0007SE)	inent markers and zones, e filed within 30 days 60-4 shall be filed once , and the operator has DIL CONSERVAT ARTESIA DISTRICT DEC 09 2015	
If the proposal is to c Aitach the Bond und following completion testing has been com- determined that the s THIS NOTICE IS LIME ROCK would Determine wheth 5-1/2? CIBP @ 1does not test, sp 1752?, 7? shoe 4 TOH. WOC. Ta 3 SQ holes throu annulus to surface surface csg flang specs. RD move	deepen directiona ler which the wor no f the involved apleted. Final At site is ready for fi S TO P&A. uld like to P&/ her 10? 40.5# 1752?. Load ot of tag subs @ 1540?, 8-1 ag cmt. Circ h ugh both 5-1/2 ce. Pump ~1/ ge. Top off cs e off location, t the foregoing is Commit	eration (clearly state all pertiner ally or recomplete horizontally, rk will be performed or provide l operations. If the operation re- bandonment Notices shall be fil- inal inspection.) A this Red Lake, Queen-G ic conductor csg is still in h csg w/water & circ clean. sequent plugs as appropri /4? shoe @ 1069?. W/er tole w/P&A mud (25 sx ge ?? & 7? csgs @ 700?. Es 43 sx cmt down 5-1/2? & ags w/cmt. Install P&A ma cut off anchors & restore strue and correct. Electronic Submission # For LIME ROCK tted to AFMSS for processi PIN	Art details, includ give subsurface the Bond No. or sults in a multiple of only after all Grayburg-San ole. Retrieve Pressure tes ate. Plug #1 and of tbg @ 1 el/100 bbls was tablish rate w up 7? annulu arker with cm location. Sec 322521 verifie RESOURCES	Andres well as a file with BLM/BI/ le completion or rec requirements, include Andres well as a 5-1/2? RBP @ st 5-1/2? csg to 5 ater). Plug #2, 7 //water down 5- s to surface. Cut t to comply with e attached wellb d by the BLM We II A LP, sent to OPHER WALLS	follows: MIF 447?. TIH & 500 psi. If cs 500 psi. If cs 500 psi. If cs 500 psi. If cs 500 cIBP @ ctly 85 sx cn 00?-Surface 1/2? & out 7? it off csg beli government ore diagrams	roposed work and appro- roposed work and appro- rrical depths of all perti- bacequent reports shall b new interval, a Form 31 n, have been completed RUSU. NM C A tag 5g nt (733'). . Perf ow s. . <i>M</i> 1 System 5 (16CRW0007SE)	inent markers and zones, e filed within 30 days 60-4 shall be filed once , and the operator has DIL CONSERVAT ARTESIA DISTRICT DEC 09 2015	
If the proposal is to o Aitach the Bond und following completion testing has been com determined that the s THIS NOTICE IS LIME ROCK would Determine wheth 5-1/2? CIBP @ 1 does not test, sp 1752?, 7? shoe TOH. WOC. Ta 3 SQ holes throu annulus to surface surface csg flang specs. RD move	deepen directiona ler which the wor no f the involved apleted. Final At site is ready for fi S TO P&A. uld like to P&/ her 10? 40.5# 1752?. Load 17540?, 8-1 ag cmt. Circ h ugh both 5-1/2 ce. Pump ~14 ge. Top off cs e off location, it the foregoing is Commit d) MIKE PIPI	eration (clearly state all pertiner ally or recomplete horizontally, rk will be performed or provide l operations. If the operation re- bandonment Notices shall be fil- inal inspection.) A this Red Lake, Queen-G ic conductor csg is still in h csg w/water & circ clean. sequent plugs as appropri /4? shoe @ 1069?. W/er tole w/P&A mud (25 sx ge ?? & 7? csgs @ 700?. Es 43 sx cmt down 5-1/2? & ags w/cmt. Install P&A ma cut off anchors & restore strue and correct. Electronic Submission # For LIME ROCK tted to AFMSS for processi PIN	at details, includ give subsurface the Bond No. or sults in a multiple ed only after all Grayburg-San ole. Retrieve Pressure tes ate. Plug #1 ad of tbg @ 1 !/100 bbls wa tablish rate w up 7? annulu arker with cm location. Sec 322521 verifie RESOURCES ing by CHRIST	Andres well as a file with BLM/BI/ le completion or rec requirements, includ 5-1/27 RBP @ st 5-1/27 RBP @ st 5-1/27 RBP @ st 5-1/27 csg to 5 , 17527-10197, 1 7527, pump exa ater). Plug #2, 7 //water down 5- s to surface. Cu t to comply with e attached wellb d by the BLM We II A LP, sent to OPHER WALLS Title PETRC Date 11/04/2	follows: MIF 447?. TIH & 500 psi. If cs cop CIBP @ ctly 85 sx cn 00?-Surface J/2? & out 7? it off csg bel government ore diagram	RUSU. NM C a tag Sg nt (733'). Sefuence Scienc	inent markers and zones, e filed within 30 days 60-4 shall be filed once , and the operator has DIL CONSERVAT ARTESIA DISTRICT DEC 09 2015	
If the proposal is to a Attach the Bond und following completion testing has been com determined that the s THIS NOTICE IS LIME ROCK would Determine wheth 5-1/2? CIBP @ 1 does not test, sp 1752?, 7? shoe TOH. WOC. Ta 3 SQ holes throu annulus to surface surface csg flang specs. RD move	deepen directiona ler which the wo no of the involved ppleted. Final At site is ready for fi S TO P&A. uld like to P&A her 10? 40.5# 1752?. Load wo of tag subs @ 1540?, 8-1 ag cmt. Circ h ugh both 5-1/2 ce. Pump ~14 ge. Top off cs e off location, t the foregoing is Commit d) MIKE PIPI (Electronic S	eration (clearly state all pertiner ally or recomplete horizontally, rk will be performed or provide l operations. If the operation re- bandonment Notices shall be fil- inal inspection.) A this Red Lake, Queen-G conductor csg is still in h csg w/water & circ clean. sequent plugs as appropri /4? shoe @ 1069?. W/er iole w/P&A mud (25 sx ge 2? & 7? csgs @ 700?. Es 43 sx cmt down 5-1/2? & 43 sx cmt down 5-1/2? & 43 sx cmt down 5-1/2? & 5 sy cut off anchors & restore for LIME ROCK ted to AFMSS for processi PIN Submission) THIS SPACE FC	at details, includ give subsurface the Bond No. or sults in a multiple ed only after all Grayburg-San ole. Retrieve Pressure tes ate. Plug #1 ad of tbg @ 1 !/100 bbls wa tablish rate w up 7? annulu arker with cm location. Sec 322521 verifie RESOURCES ing by CHRIST	Andres well as a file with BLM/BI/ le completion or rec requirements, includ s 5-1/2? RBP @ st 5-1/2? RBP @ st 5-1/2? csg to 5 , 1752?-1019?, t 752?, pump exa ater). Plug #2, 7 //water down 5-' s to surface. Cu to comply with e attached wellb d by the BLM We II A LP, sent to OPHER WALLS Title PETRC Date 11/04/2	follows: MIF 447?. TIH & 500 psi. If cs cop CIBP @ ctly 85 sx cn 00?-Surface J/2? & out 7? it off csg bel government ore diagram	RUSU. NM C a tag Sg nt (733'). Sefuence Scienc	inent markers and zones. e filed within 30 days 60-4 shall be filed once , and the operator has DIL CONSERVAT ARTESIA DISTRICT DEC 0 9 2015 RECEIVED D 12/9/20/2	
If the proposal is to a Attach the Bond und following completion testing has been com determined that the s THIS NOTICE IS LIME ROCK would Determine wheth 5-1/2? CIBP @ 1 does not test, sp 1752?, 7? shoe TOH. WOC. Ta 3 SQ holes through annulus to surface surface csg flang specs. RD moves 14. I hereby certify that Name (Printed/Typed Signature	deepen directiona ler which the wor no f the involved apleted. Final At site is ready for f S TO P&A. uld like to P&/ her 10? 40.5# 1752?. Load ot of tag subs @ 1540?, 8-1 ag cmt. Circ h ugh both 5-1/2 ce. Pump ~1- ge. Top off cs e off location, the foregoing is Commit d) MIKE PIPI (Electronic S Approver Not f any, are attache holds legal or equ	eration (clearly state all pertiner ally or recomplete horizontally, rk will be performed or provide loperations. If the operation re- bandonment Notices shall be fil- inal inspection.) A this Red Lake, Queen-G conductor csg is still in h csg w/water & circ clean. sequent plugs as appropri /4? shoe @ 1069?. W/er ole w/P&A mud (25 sx ge 2? & 7? csgs @ 700?. Es 43 sx cmt down 5-1/2? & ags w/cmt. Install P&A ma cut off anchors & restore strue and correct. Electronic Submission # For LIME ROCK tted to AFMSS for processi PIN Submission) THIS SPACE FC Specified)	ant details, includ give subsurface the Bond No. or sults in a multiple ed only after all Grayburg-San ole. Retrieve Pressure tes ate. Plug #1 and of tbg @ 1 el/100 bbls wa tablish rate w up 7? annulu arker with cm location. Sec 322521 verifie RESOURCES ing by CHRIS	Andres well as a file with BLM/BI/ le completion or rec requirements, includ 5-1/27 RBP @ st 5-1/27 RBP @ st 5-1/27 RBP @ st 5-1/27 csg to 5 , 17527-10197, 1 7527, pump exa ater). Plug #2, 7 //water down 5- s to surface. Cu t to comply with e attached wellb d by the BLM We II A LP, sent to OPHER WALLS Title PETRC Date 11/04/2	follows: MIF 447?. TIH & 500 psi. If cs 500 psi. If	RUSU. NM C a tag Sg nt (733'). Sefuence Scienc	inent markers and zones, e filed within 30 days 60-4 shall be filed once , and the operator has DIL CONSERVAT ARTESIA DISTRICT DEC 09 2015	

JULIA A FEDERAL #3

Current


Red Lake, Queen-Grayburg-San Andres

(E) Section 5, T-18-S, R-27-E, Eddy County, NM

M. Pippin 10/6/15

Spud: 8/3/45 Completed: 4/20/46 Elevation: 3475' GL

\$

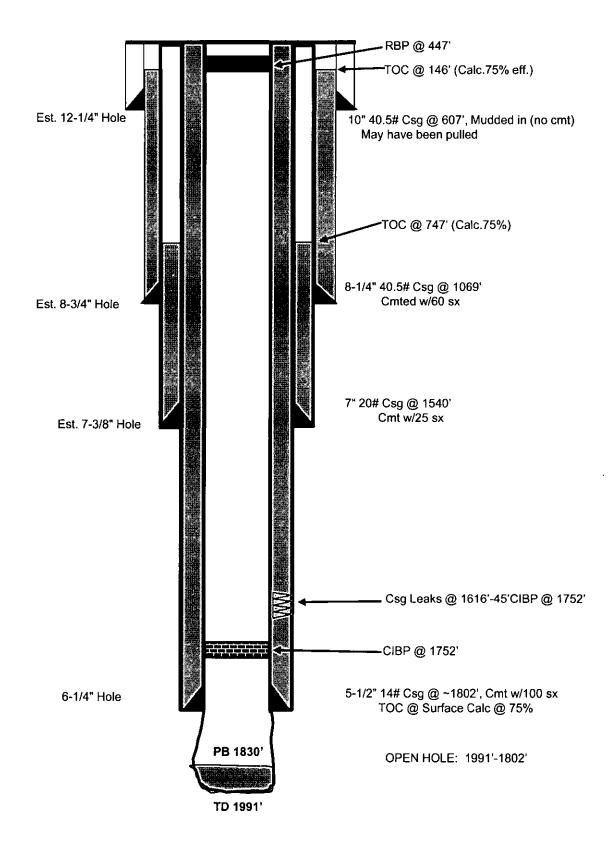


JULIA A FEDERAL #3


Proposed P&A

Red Lake, Queen-Grayburg-San Andres

(E) Section 5, T-18-S, R-27-E, Eddy County, NM

M. Pippin 10/6/15



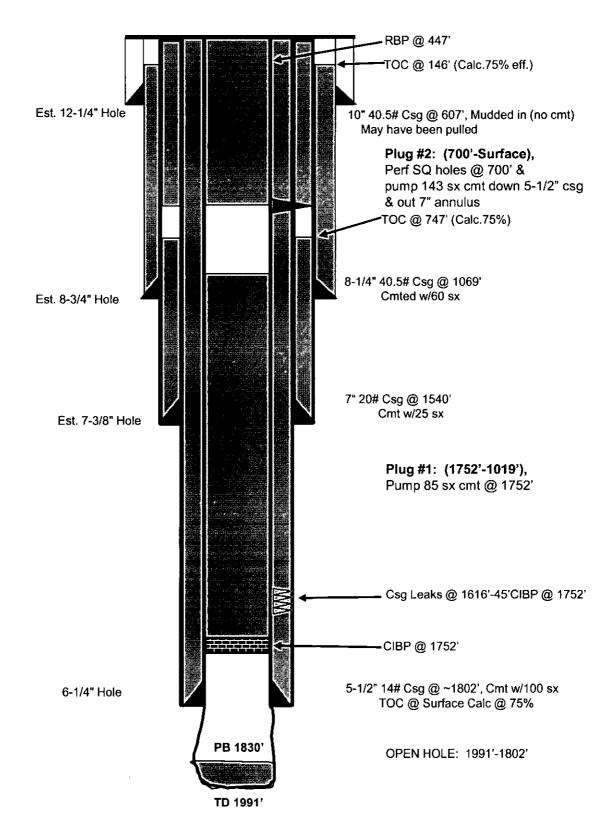

η,