

Submit 1 Copy To Appropriate District Office

District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103
October 13, 2009

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-025-30195 ✓
1. Type of Well: Oil Well ☐ Gas Well ☐ Other ☒ HOBBS OCD		5. Indicate Type of Lease STATE ☒ FEE ☐ ✓
2. Name of Operator COG Operating LLC		6. State Oil & Gas Lease No. B-2516
3. Address of Operator 600 W. Illinois, Midland, TX 79701		7. Lease Name or Unit Agreement Name Petrus D ✓
4. Well Location Unit Letter H : 1650 feet from the N line and 990 feet from the E line Section 11 Township 17S Range 33E NMPM County Lea		8. Well Number 4 ✓
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 4155' GR		9. OGRID Number 229137 ✓
		10. Pool name or Wildcat Maljamar Grayburg-San Andres

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

OTHER: ☐

SUBSEQUENT

REMEDIAL WORK
COMMENCE DRILLING OPNS.
CASING/CEMENT JOB

OTHER: ☐

X INT TO PA Pm
P&A NR _____
P&A R _____

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Set CIBP @ 3710'. Circulate hole w/ mud laden fluid. Pressure test csg. Spot 25 sx cmt @ 3710-3610'.

2. Spot 25 sx cmt @ 2850-2750'.

3. Spot 25 sx cmt @ 1550-1446'. WOC & Tag

4. Spot 25 sx cmt @ ~~100'~~ Surface. 250' to surface

5. Cut off well head, weld on Dry Hole Marker.

Verify cement to surface

① Set CIBP @ 4350'
Spot 25 sx
WOC & TAG

Spud Date:

NOTIFY OCD 24 HOURS PRIOR TO
BEGINNING PLUGGING OPERATIONS

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Ben Montgomery TITLE Agent DATE 2-15-17
Type or print name Ben Montgomery E-mail address: benm@bernmandassociates.com PHONE: 432-580-7161
For State Use Only

APPROVED BY: Mark Whitaker TITLE Petroleum Engr. Specialist DATE 02/16/2017
Conditions of Approval (if any):

COG Operating LLC


30-025-30195

Lease & Well # Petrus D #4

Spud - 8/20/90

Elevation - 4155' G

KB -

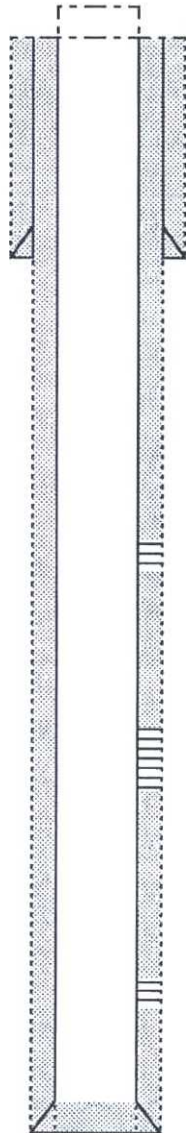

8 5/8" 24# K-55 @ 1496', 600 sx Hall Lite, , 200 sxs CL C, circ 100 sx.

Queen

3760-80

Acidized w/2000 gal 7 1/2 % NEFE

fraced w/19,950 gal XL, 15% CO2, 45,000# sd, screened out.

Grayburg

4400-85

Acidized w/1,000 gal 15% NEFE

Fraced w/20,000 gal lg, 22,500 # sd

San Andres

4584-4596

Acidized w/1,000 gal 15% NEFE, frac w/20,000 gal lg, 18,000 # sd.

PBTD-4673'

5 1/2" 17 # csg @ 4700, cmt w/675 sx 35/65/6, 450 sx CL C.

Circulated cmt.

32.8520126

-103.6286163

COG Operating LLC

30-025-30195

Lease & Well #


Petrus D #4

Spud - 8/20/90

KB -

Elevation - 4155' G

8 5/8" 24# K-55 @ 1496', 600 sx Hall Lite.
200 sxs CL C, circ 100 sx.

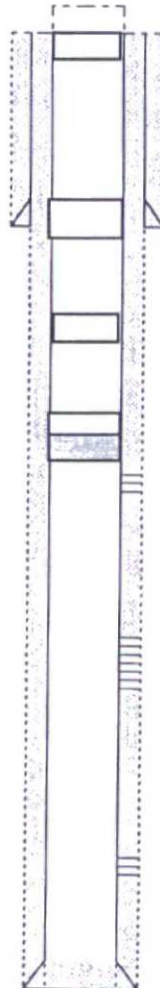

4. Spot 25 sx cmt @ 100'-Surface.

3. Spot 25 sx cmt @ 1550-1446'. WOC & Tng

2. Spot 25 sx cmt @ 2850-2750'.

1. Set CIBP @ 3710'. Circulate hole w/ mud laden fluid. Pressure test csg.
Spot 25 sx cmt @ 3710-3610'.

Queen

3760-80

Acidized w/2000 gal 7 1/2 % NEFE

fraced w/19,950 gal XL, 15% CO2, 45,000# sd, screened out

Grayburg

4400-85

Acidized w/1,000 gal 15% NEFE

Frac w/20,000 gal lg, 22,500 # sd

San Andres

4584-4596

Acidized w/1,000 gal 15% NEFE, frac w/20,000 gal lg, 18,000 # sd.

PBTD-4673'

5 1/2" 17 # csg @ 4700, cmt w/675 sx 35/65/6, 450 sx CL C.

Circulated cmt.

32.8520126

-103.6286163